


**NOTES:**

- ① MAT'L: COPPER (STOCK TKN.  $\pm .040$ )  
PLATING: ELECTRO TIN (.0003 MIN)
  - ② TIN-PLATED BRASS FUNNEL FERRULE
  - ③ NYLON INSULATION (COLOR CODED YELLOW)
- STUD SIZES: ( $\pm .005$ )
- 02 = .094  
04 = .119  
06 = .146  
08 = .173  
10 = .198  
14 = .265  
56 = .328  
38 = .390

ALL DIMENSIONS =  $\frac{\text{INCHES}}{\text{MM}}$

(MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

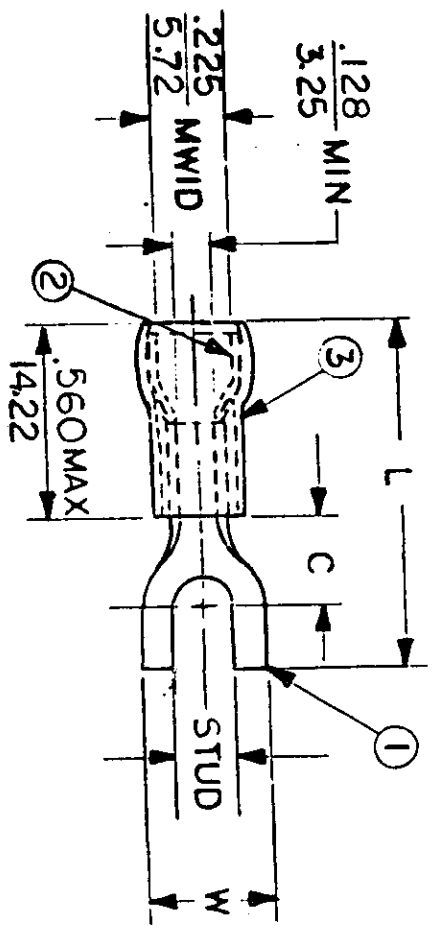

"UL" LISTING #E32244  
"CSA" LISTING #18689

WIRE SIZE: 12 - 10 AWG  
4.0 - 6.0 MM<sup>2</sup>

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	REFERENCE		DATE	TITLE:
				SCALE:	NTS		
C-841-	$\frac{.375}{9.53}$	$\frac{.301}{7.65}$	$\frac{1.118}{28.40}$	DRWN. BY: JJ	11.12.84	SPADE TONGUE TERMINAL AVIKRIMP 800-SERIES	
C-868-	$\frac{.533}{13.54}$	$\frac{.393}{9.98}$	$\frac{1.271}{32.28}$	CHKD. BY: GZ APPRD. BY:	11.26.84		
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED				FRAC.	DEC.	ANG.	
				±	±	±	

FILE NO.

C-CD-803-02



DWG. NO. A CUSTOMER DWG