

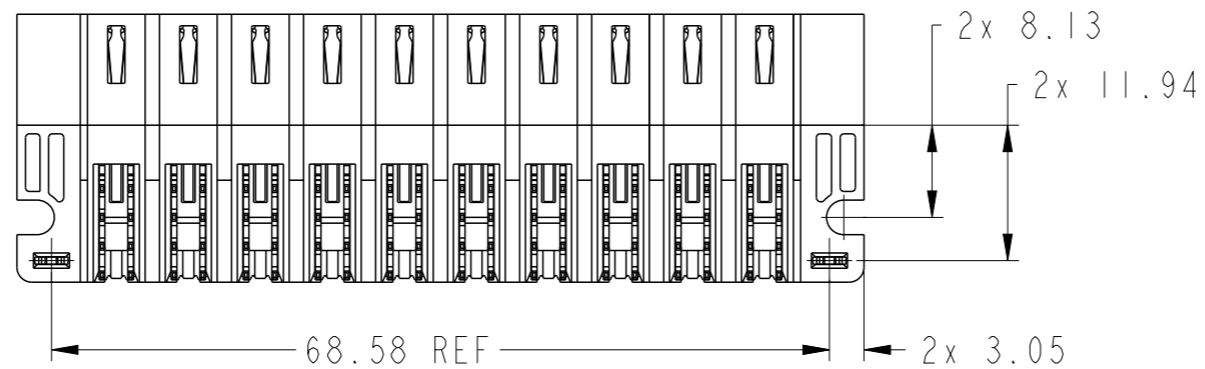
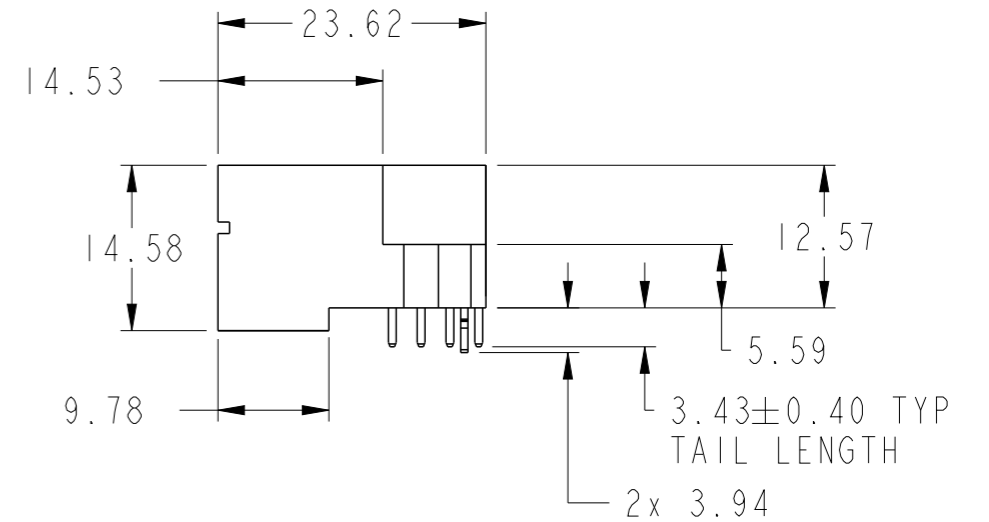
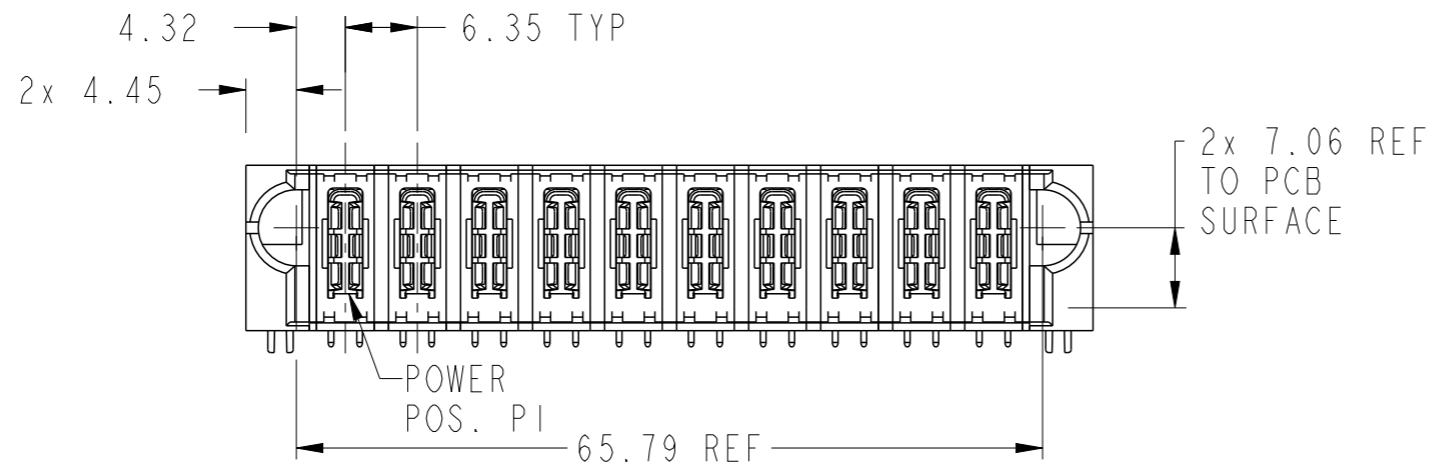


PART NUMBER 10106124-A000001LF

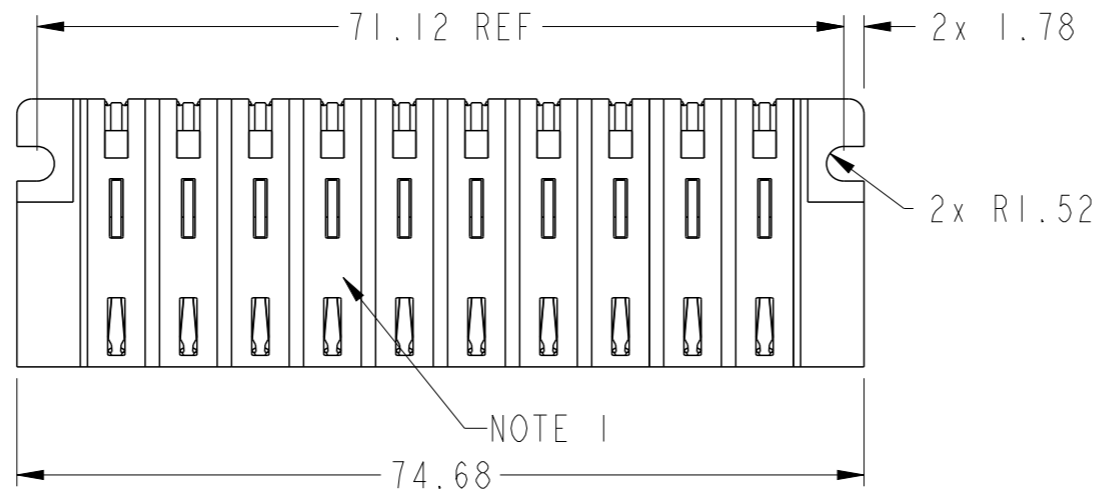

spec ref	-			dr	Eddy Zeng	2014/09/09	projection	MM	size	A3	scale	3:2
tolerance std	ASME Y14.5			eng	Rainbow Zhan	2014/09/16			ecn no		-	
TOLERANCES UNLESS OTHERWISE SPECIFIED			chr	Li-He	2014/09/15	rel level			Released			
surface		linear	0.X	±0.5		title 10HP RA STB HEADER	product family PwrBlade+	dwg no 10106124-A000001	rev		A	
ASME Y14.5		angular	0°	±2°					www.fci.com	cat. no.	Product - Customer Drw	sheet 1 of 3

PRODUCT NO.	ROWS	HIGH POWER										E2	
		E1	P1	P2	P3	P4	P5	P6	P7	P8	P9		P10
10106124-8000001LF	D C B A	HA	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	HA

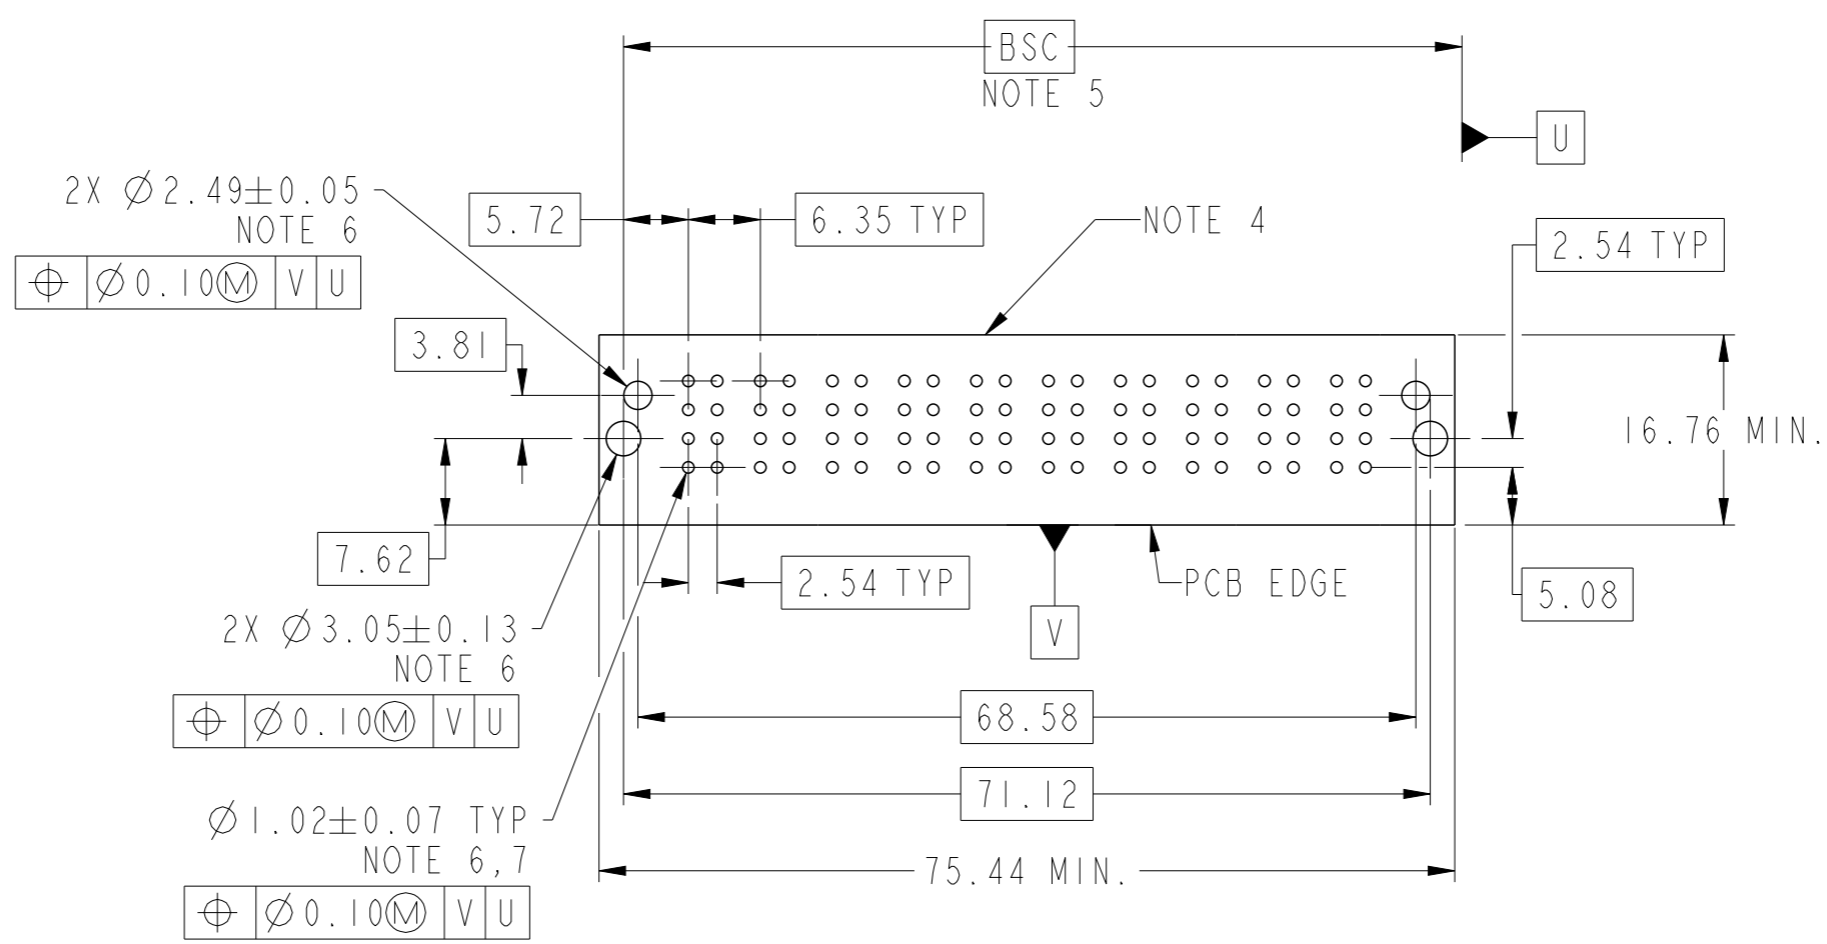

Copyright FCI.

CODE	DESCRIPTION
HI	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN

spec ref	-	dr	Eddy Zeng	2014/09/09	projection	MM	size	A3	scale	3:2									
tolerance std	ASME Y14.5	eng	Rainbow Zhan	2014/09/16			ecn no	-	rel level	Released									
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Li-He	2014/09/15															
surface	<table border="1"> <tr><td>linear</td><td>0.X</td><td>±0.5</td></tr> <tr><td></td><td>0.XX</td><td>±0.25</td></tr> <tr><td></td><td>0.XXX</td><td>±0.10</td></tr> </table>	linear	0.X	±0.5		0.XX	±0.25		0.XXX	±0.10	appr	Pei-Ming Zheng	2014/09/16	product family	PwrBlade+				
linear	0.X	±0.5																	
	0.XX	±0.25																	
	0.XXX	±0.10																	
ASME Y14.5	<table border="1"> <tr><td>angular</td><td>0°</td><td>±2°</td></tr> </table>	angular	0°	±2°			cat. no.	10HP	RA STB HEADER	dwg no	10106124-A000001	rev	A						
angular	0°	±2°																	
www.fci.com					Product - Customer Drw		sheet 2 of 3												

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.



Copyright FCI.

spec ref -		dr	Eddy Zeng	2014/09/09	projection 	MM ←→	size	A3	scale	3:2
tolerance std	ASME Y14.5	eng	Rainbow Zhan	2014/09/16			ecn no	-		
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Li-He	2014/09/15			rel level	Released		
surface	linear	0.X	±0.5	FCI www.fci.com	10HP RA STB HEADER	cat. no.	Product - Customer Drw	sheet 3 of 3	rev	A
		0.XX	±0.25							
		0.XXX	±0.10							
ASME Y14.5	angular	0°	±2°							