




REVISION		DATE	APPROVED
LTR	DESCRIPTION		
A	NEW RELEASE	05/18/94	H.T.




DB25 Male

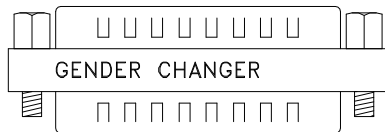

DB25 Male

Specification:

1. Voltage Rating: 300 VAC(rms).
2. Current Rating: 5 AMP Continuous.
3. Dielectric Strength: 1,000 VAC.
4. Insulation Resistance: 5,000 Mohm min.
5. Durability: 30 Cycles for Gold Flash,
150 Cycles for 15u Gold Plated.
6. Corrosion Resistance: Meet MIL-STD-202F Method
101 Condition B Salt Water. Spray for Gold Plated Over 15u.
7. Mating Force Insertion Force: 1 oz – 16 oz
Average 150 gram. Extraction Force: 1 KG min.

UNLESS OTHERWISE SPECIFIED: 1. DIMENSION ARE IN INCHS 2. TOLERANCES: DECIMALES X.XX ±0.25 3. DO NOT SCALE DRAWING 4. REMOVE ALL BURRS AND BREAK SHARP EDGES.	CUSTOMER	 13851 OAKS AVE. CHINO, CA 91710 TEL.: 909-590-5430 FAX: 909-590-5433				
	R.F.Q. NO.					
	DRAWN	DATE	TITLE			
	Howie Tseng	05/18/94	DB25, M/M, Mini Gender Changer			
PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY COMTOP Enterprises Corp.	CHECKED	CUSTOMER APPROVAL	SIZE	DWG NO.	PART NO.	REV.
				31D3-221	31D3-22100	A
			SCALE: NDNE	RELEASE DATE: 05/18/94	SHEET: 1 OF 1	