


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 92202COLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
FRAME: BRASS. NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED

2. P/N: 92100COLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
END CAP: MACHINED DELRIN. WHITE.
FRAME: BRASS. NICKEL PLATED.

3. P/N: W-200/COLOR
22AWG 65X40 TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

4. PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

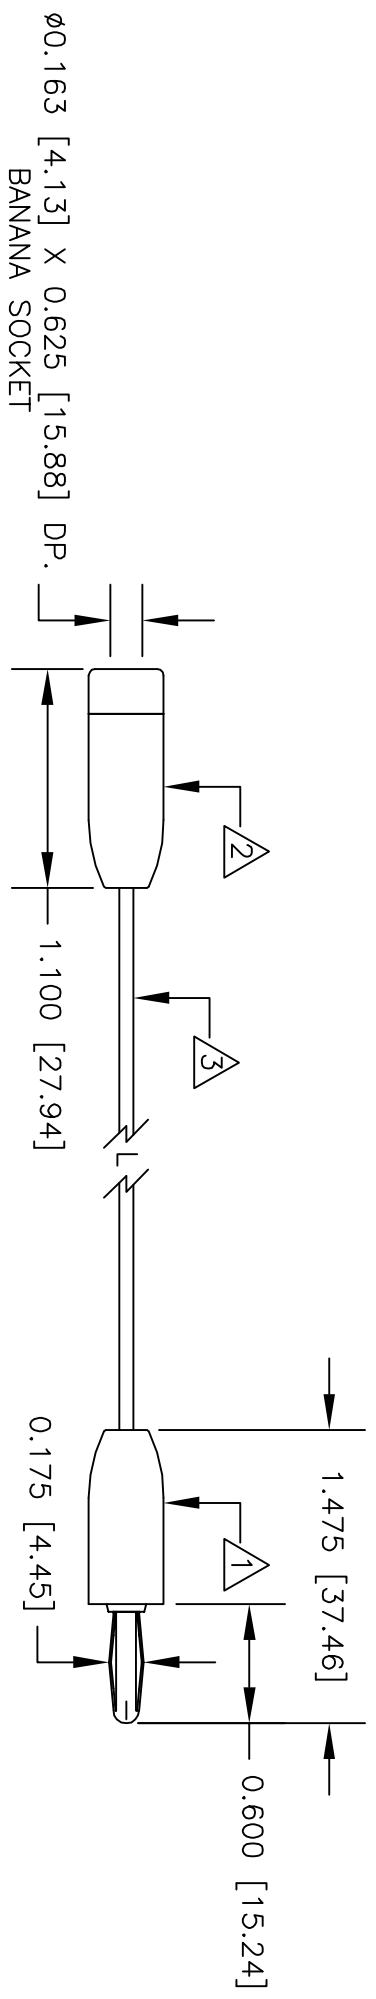

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.		DESCRIPTION	
±	.XX ±	±	±	APPROVALS	DATE
	.XXX ±			DRAWN	R.L. 10/10
MATERIAL SEE NOTE.		APPROVED BY		STD BAN PLUG (9202) TO STD BAN SKT (9216)	
FINISH SEE NOTE.				SIZE CODE IDENT NO. DRAWING NO.	
USED ON				A 08505 9108	
APPLICATION		DO NOT SCALE DRAWING		SCALE 1:1	
				SHEET 1 OF 1	

E-Z-HOOK DIVISION OF TEKTEST INC.
ARCADIA, CA 91006 U.S.A.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.