




1

2

3

4

5

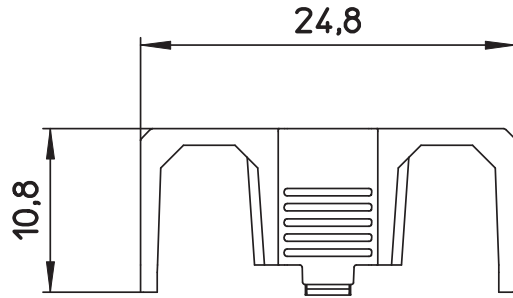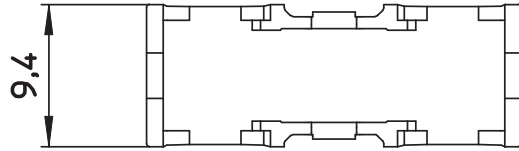

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: PETG35
 FLAMMABILITY RATING: UL94V0
 COLOR: BLACK

ENVIRONMENTAL
 OPERATING TEMPERATURE: -30°C UP TO +120°C
 COMPLIANCE: LEAD FREE AND ROHS

MECHANICAL
 FUSE-LINK: 5x20 mm
 PROTECTION RATE: IP40

PACKAGING
 BOX


A

B

C

D

RoHS Compliant			
G			
F			
E			
D			
C			
B	01-APR-15	PROTECTION RATE	QL
A	11-SEP-14	PDF	AK
REV	DATE	FILE	BY



APPROVAL: QL

GENERAL TOLERANCE

±0,1

UNIT: MM

SCALE:

SHEET: 1/2

DRAW: AK



DESCRIPTION: ACCESSORIES - PCB - CLIP COVER - THT -
 GLOW WIRE PLASTIC - WR-FSH

WERI PART NO: 696 121 101 001

SIZE

A4

1

2

3

4

5

Cautions and Warnings:

This electronic component is designed and developed with the intention for use in general electronics equipments.

Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Würth Elektronik must be asked for a written approval.

In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.

A

B

C

RoHS Compliant

G				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15		
F							
E							
D							
C				APPROVAL: JC	UNIT: MM	DESCRIPTION: DISCLAIMER	SIZE A4
B					SCALE:		
A	10-SEP-14	PDF	QL		SHEET: 2/2	WERI PART NO: DISCLAIMER	
REV	DATE	FILE	BY		DRAW: QL		

D