

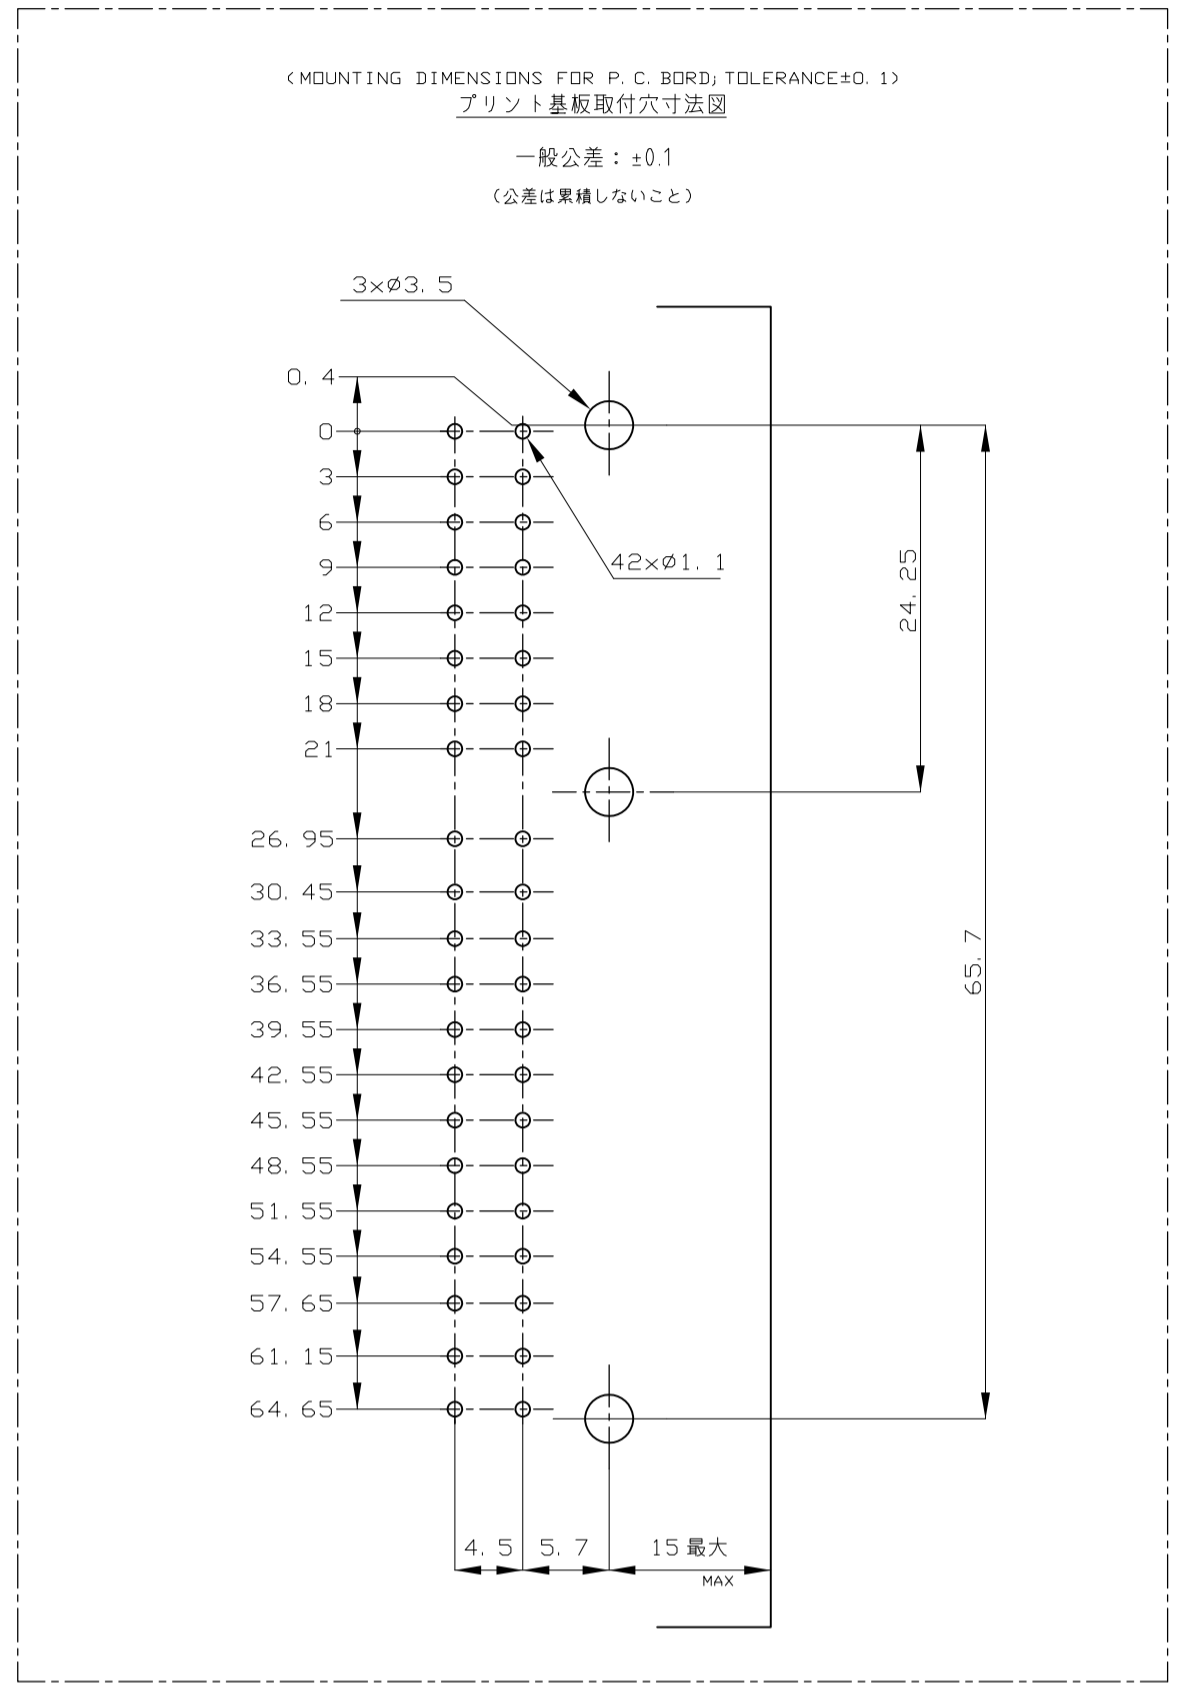



REVISIONS					
REV	DATE	DESCRIPTION	BY	CHK	APPV
N9	REVISED	ECR-16-003280	06SEP2016	KF	HY

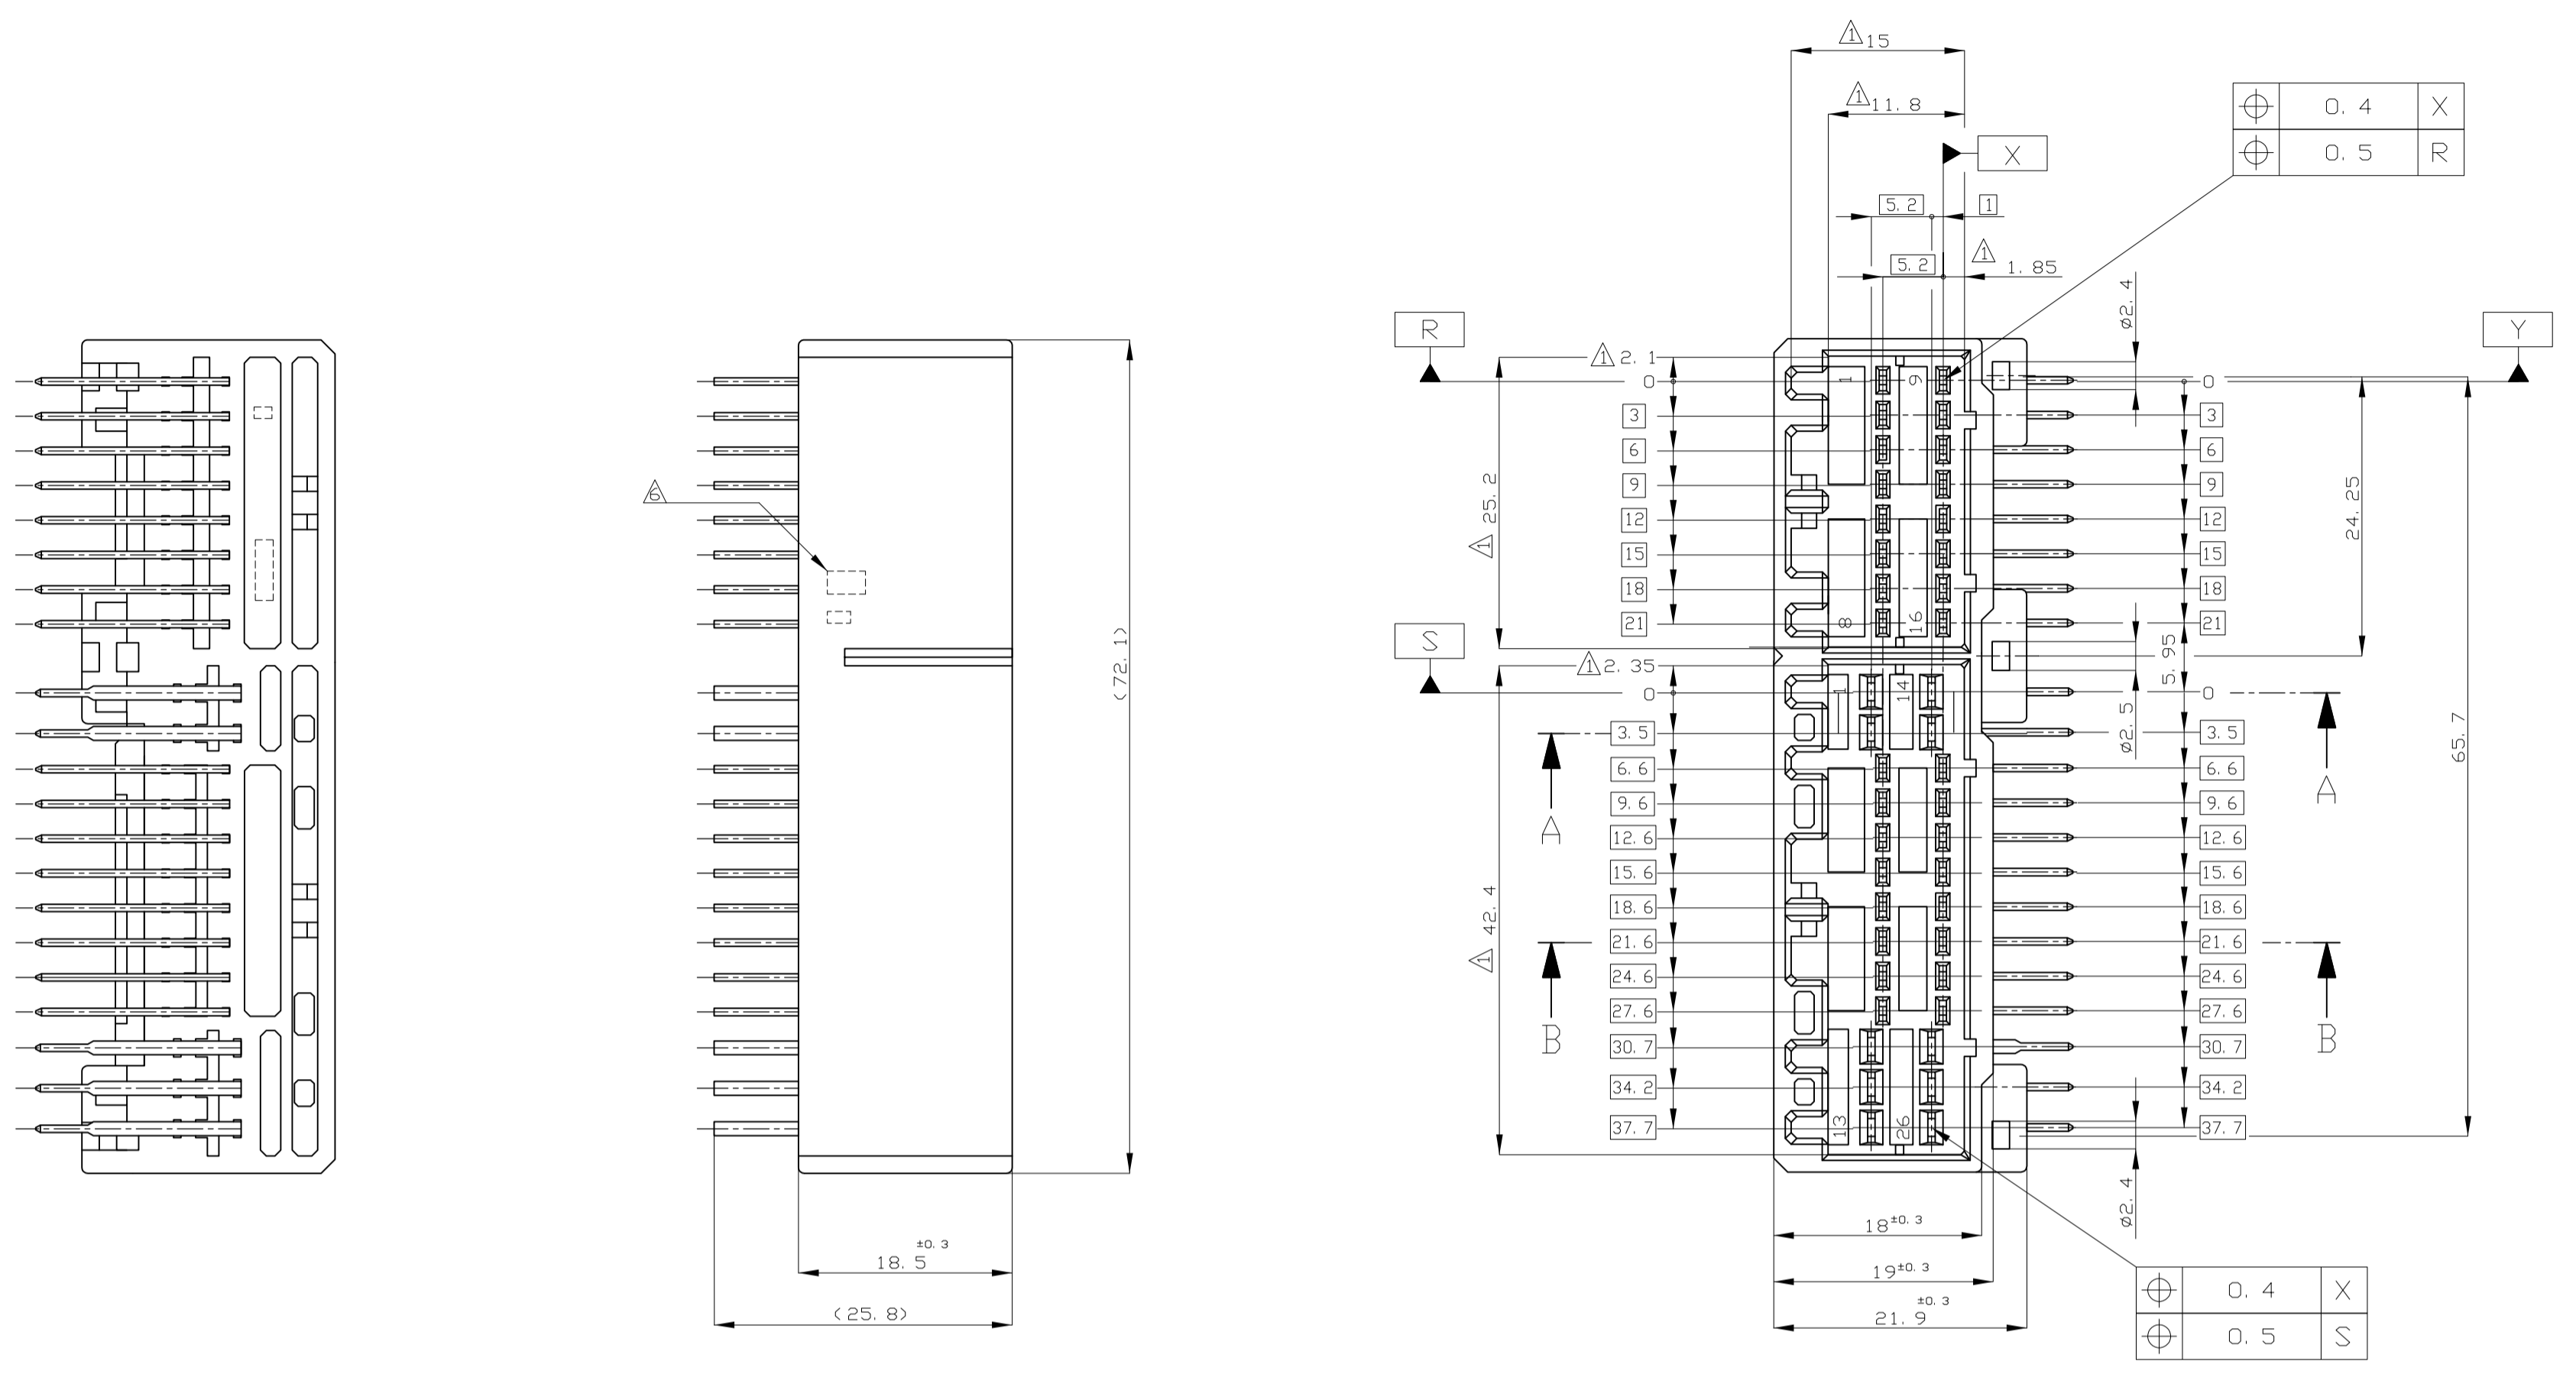

- △ [] 面から2mmの範囲で測定
- 2 嵌合相手ハジギング型 174514, 174516, 917981, 917992
- 3 推奨取付ねじ: JIS B1115, B1122 タッピングねじ, なべ2種 呼び径3, 長さ6mm以下 (締付けトルク: 0.4N-m (4kg-cm) 以下)
- 4 適用製品規格番号: 108-5280, 5342

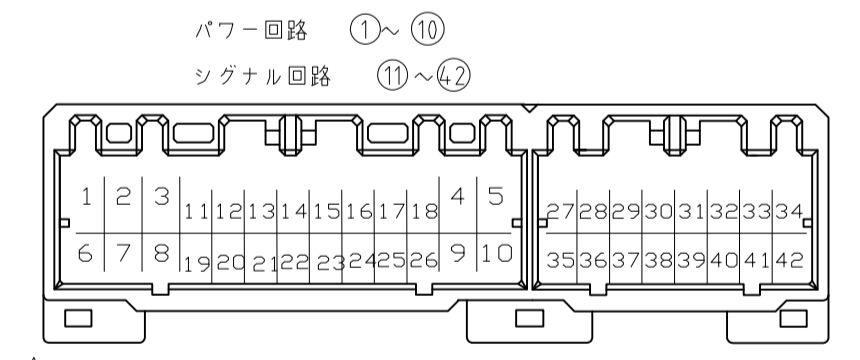

- △ MUST BE KEPT BETWEEN [] AND 2
- 2 THE MATING PLUG HSG. PART NUMBER; 174514, 174516, 917981, 917992
- 3 RECOMMENDED MOUNTING SCREW; 3mmDIA, 6mmLENGTH(MAX.)
- 4 PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122
- △ TIGHTENING TORQUE; 0.4N-m(4kg-cm)MAX.
- 4 APPLICABLE PRODUCT SPEC NO ; 108-5280, 108-5342
- △ CIRCUIT NUMBER
- POWER CIRCUIT NO. ①~⑩
- SIGNAL CIRCUIT NO. ⑪~④②
- △ MARKING FOR DISCERNMENT OF THE CONTACT FINISH

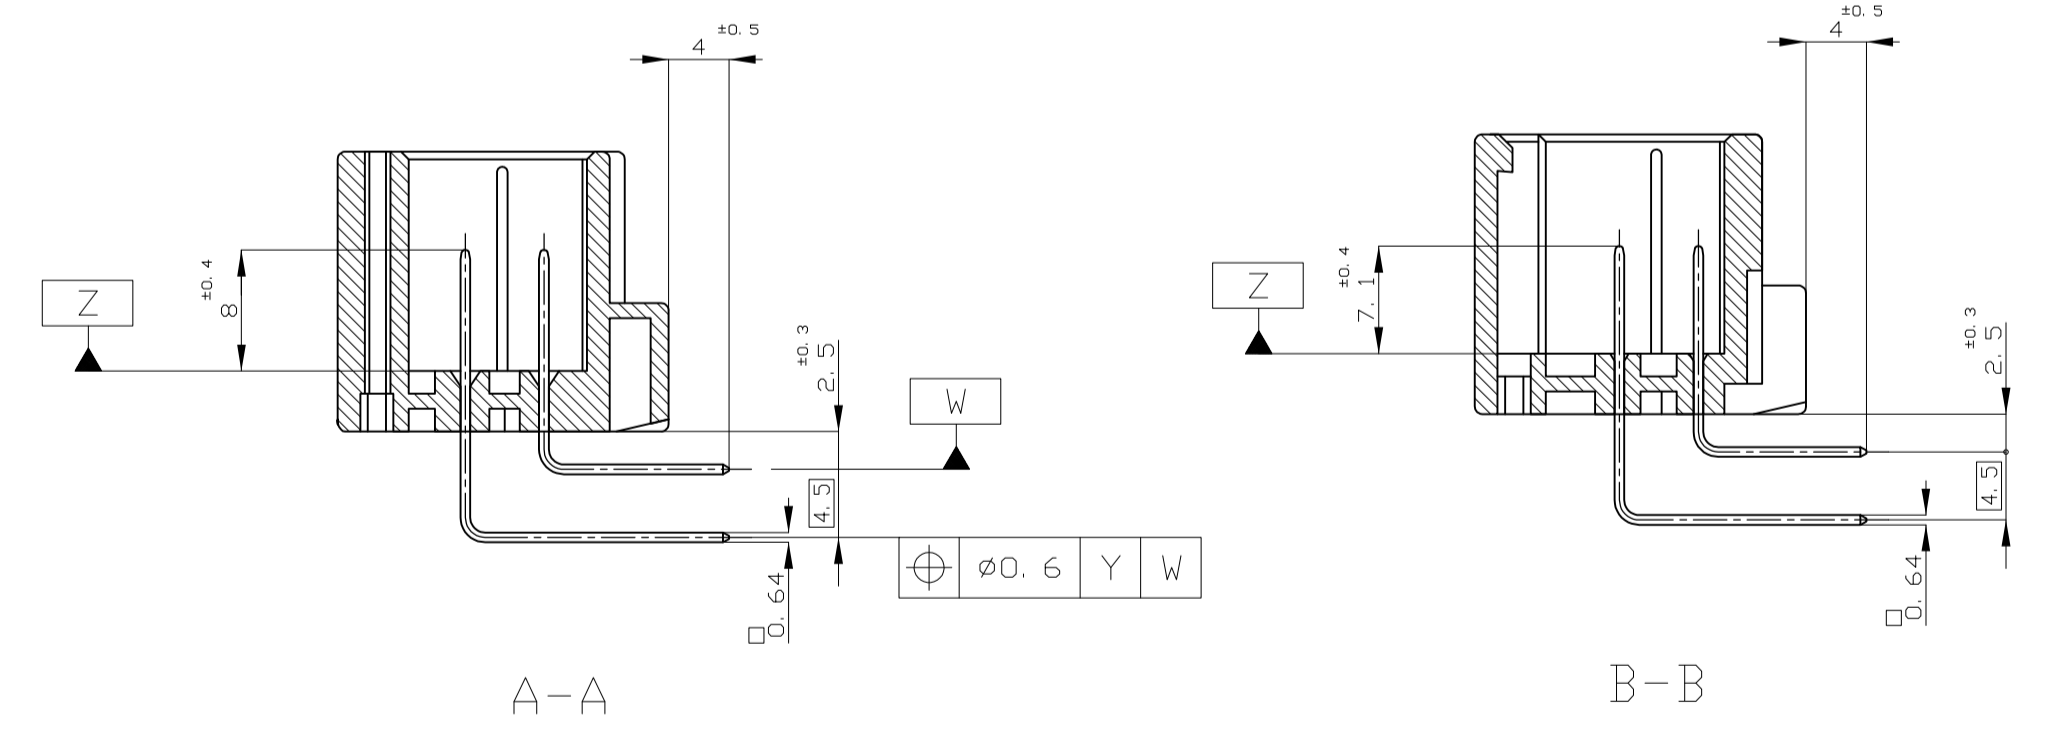

NO.	FINISH	PLATING	THICKNESS	CONTACT	CONTACT SIDE	POWER CIRCUIT NO.	SIGNAL CIRCUIT NO.	HOUSING COLOR	PART NO.
54	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 11	⑩	(29)-(32) (37)-(40) (42)	GRAY 反色	4-5175446-6			
59	PRE-TINNED × 31	SELECTIVE GOLD × 2	///	(13) (23)	GRAY 反色	9-5175446-6			
58	PRE-TINNED × 40	SELECTIVE GOLD × 16	///	(11)-(26)	GRAY 反色	8-5175446-6			
58	PRE-TINNED × 26	SELECTIVE GOLD × 16	///	(11)-(26)	NATURAL 自然色	8-5175446-1			
56	PRE-TINNED × 26	SELECTIVE GOLD × 17	⑨	(27)-(42)	NATURAL 自然色	6-5175446-1			
54	PRE-TINNED × 34	SELECTIVE GOLD × 8	///	(19)-(28)	NATURAL 自然色	4-5175446-1			
53	PRE-TINNED × 36	SELECTIVE GOLD × 6	///	(38) (39) (38) (39) (40)	GRAY 反色	3-5175446-6			
53	PRE-TINNED × 34	SELECTIVE GOLD × 8	///	(13) (18) (20) (26) (27) (34) (35) (42)	NATURAL 自然色	3-5175446-1			
52	PRE-TINNED × 10	SELECTIVE GOLD × 32	///	(11)-(42)	GRAY 反色	2-5175446-6			
52	PRE-TINNED × 10	SELECTIVE GOLD × 32	///	(11)-(42)	NATURAL 自然色	2-5175446-1			
55	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 12	///	(21)-(28) (36)-(40) (42)	NATURAL 自然色	5-5175446-1			
9	TIN-LEAD	SELECTIVE GOLD × 2	///	(13) (23)	GRAY 反色	9-175446-6			
8	TIN-LEAD	SELECTIVE GOLD × 16	///	(11)-(26)	GRAY 反色	8-175446-6			
8	TIN-LEAD	SELECTIVE GOLD × 16	///	(11)-(26)	BLACK 黒色	8-175446-2			
8	TIN-LEAD	SELECTIVE GOLD × 16	///	(11)-(26)	NATURAL 自然色	8-175446-1			
7	TIN-LEAD	SELECTIVE GOLD × 3	///	(14) (15) (22)	GRAY 青色	7-175446-5			
6	TIN-LEAD	SELECTIVE GOLD × 17	⑨	(27)-(42)	NATURAL 自然色	6-175446-1			
5	TIN-LEAD	SELECTIVE GOLD × 12	///	(21)-(28) (36)-(40) (42)	NATURAL 自然色	5-175446-1			
4	TIN-LEAD	SELECTIVE GOLD × 11	⑩	(29)-(32) (37)-(40) (42)	GRAY 反色	4-175446-6			
4	TIN-LEAD	SELECTIVE GOLD × 8	///	(19)-(28)	NATURAL 自然色	4-175446-1			
3	TIN-LEAD	SELECTIVE GOLD × 6	///	(38) (39) (38) (39) (40)	GRAY 反色	3-175446-6			
3	TIN-LEAD	SELECTIVE GOLD × 8	///	(13) (18) (20) (26) (27) (34) (35) (42)	NATURAL 自然色	3-175446-1			
2	TIN-LEAD	SELECTIVE GOLD × 32	///	(11)-(42)	GRAY 反色	2-175446-6			
0	PRE-TINNED 鍍めつき × 42		///		GRAY 反色	175446-6			
1	SELECTIVE-TIN (MATTE) 鍍めつき × 42	SELECTIVE-TIN (鍍めつき) × 42	///		NATURAL 自然色	175446-2			
0	PRE-TINNED 鍍めつき × 42		///		NATURAL 自然色	175446-1			

GENERAL TOLERANCE

0<X<1	10	±0.2
10<X<30	±0.25	
30<X<100	±0.3	
ANGLES	±3°	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 寸法 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED

0 PLC ± 1
1 PLC ± 0.5
2 PLC ± 0.3
3 PLC ± 0.2
4 PLC ± 0.1

MATERIAL: HOUSING: PBT CONTACT: BRASS

FINISH: 仕上

SEE TABLE 表参照

APPROVED: M. KADOSAKI 17MAY05
CHK: T. SHINOHARA 17MAY05
APPROVED: K. BETSUJI 17MAY05

PRODUCT SPEC: 製品規格

APPLICATION SPEC: 取付適用規格

SIZE: A1

WEIGHT: 21.3 g

SCALE: 2:1

SHEET: 1 of 1

REV: N9

CUSTOMER DRAWING

STE TE Connectivity

42POSITION CAP HOUSING ASSY
040/070 SERIES HYBRID I/O CONNECTOR

00779 175446