


PART NO. SEE CHART
 DWG. NO. SD-92316-001

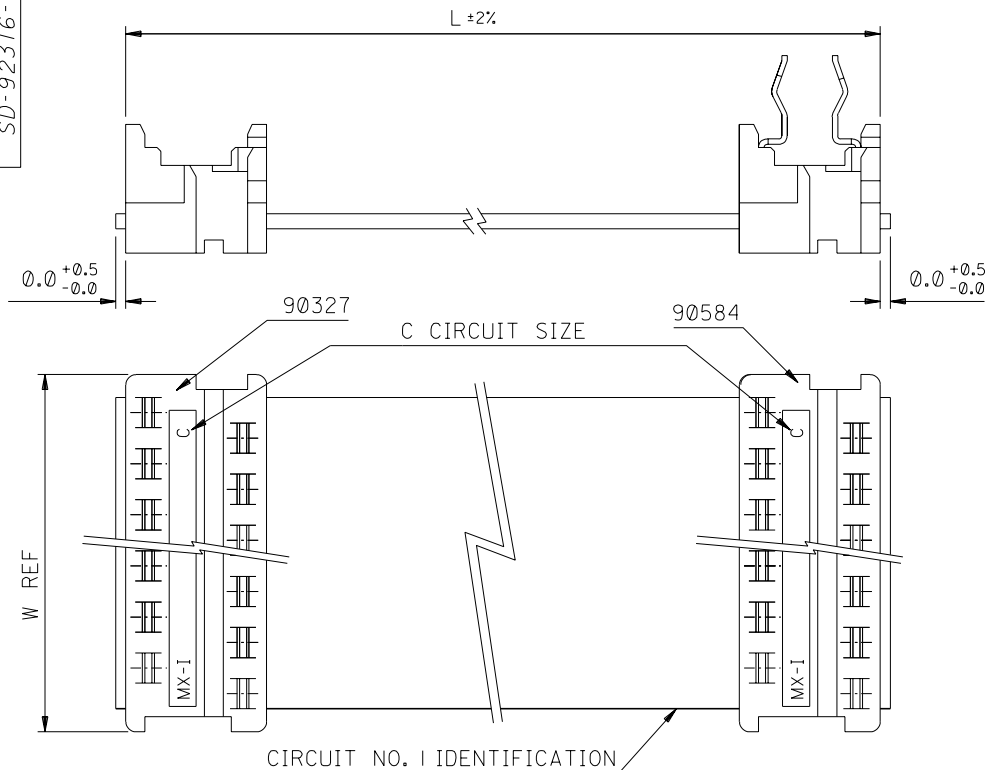

90327 CONNECTOR	
CIRCUIT SIZE	DIMENSION W
4	7.59
6	10.13
8	12.67
10	15.21
12	17.75
14	20.29
16	22.83
18	25.37
20	27.91
22	30.45
24	32.99
26	35.53

90584 CONNECTOR	
CIRCUIT SIZE	DIMENSION W
4	7.59
6	10.13
8	12.67
10	15.21
12	17.75
14	20.29
16	22.83
18	25.37
20	27.91
22	30.45
24	32.99
26	35.53

CABLE DETAILS:
 28 AWG , 1.27 MM PITCH , 7 STRANDS WITH TINNED COPPER ,
 GREY PVC INSULATION WITH A COLOURED POLARITY STRIPE
 INDICATING CIRCUIT NO. 1 , UL 2651.

- NOTES:
1. SEE PRODUCT SPECIFICATIONS PS-99020-0011.
 2. SEE TERMINATION SPECIFICATION ES-99033-0001.
 3. SEE TERMINATION SPECIFICATION ES-99033-0002.
 4. SEE CABLE SPECIFICATION ES-99027-0006.
 5. HARNESSES WILL BE 100% ELECTRICALLY TESTED FOR SHORTS AND DISCONTINUITIES.

ORDERING INFORMATION

92316-****

CIRCUIT SIZE
 LENGTH L IN CENTIMETRES

LENGTHS AVAILABLE FROM 6 CM TO 120 CM
 e.g. 92316-1208 = 12 CIRCUIT
 WITH LENGTH L OF 8 CM.

NOTE : FOR LENGTHS OF
 100 CM , THE PART NO. IS 92316-***01
 105 CM , THE PART NO. IS 92316-***02
 110 CM , THE PART NO. IS 92316-***03
 115 CM , THE PART NO. IS 92316-***04
 120 CM , THE PART NO. IS 92316-***05

REF DIM ADDED
 EC NO. 2003-0374
 DRAWN: P.FINN 02/00/21
 CHK: / / /
 APPR: / / /

QUALITY SYMBOLS
 MAJOR =
 CRITICAL =
 C =

GENERAL TOLERANCES:
 (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±0.	±.
3 PLACES	±0.	±.
2 PLACES	±0.	±.
1 PLACE	±0.	±.

ANGULAR: ± 1/2°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

SCALE 4 : 1
 DESIGN UNITS mm INCH
 THIRD ANGLE PROJECTION mm INCH ONLY

DRAWN BY & DATE
 MCURRAN 98/06/19

CHECKED BY & DATE
 AMcCANN 98/06/19

APPROVED BY & DATE
 MWILHITE 98/06/19

CAD FILENAME
 S92316X1.DGN

TITLE: PICOFLEX IDT TO BOARD-IN STANDARD ASSEMBLIES

MOLEX INCORPORATED

MATERIAL NO. SEE CHART
 DRAWING NO. SD-92316-001
 SHEET NO. 1 OF 1