

SPECIFICATION CONTROL DRAWING


82A1821

TITLE TWO CONDUCTOR CABLE, SHIELDED, JACKETED, FLEXIBLE

Date 01-25-01

Revision B

This specification sheet forms a part of the latest issue of Raychem Specification 80.

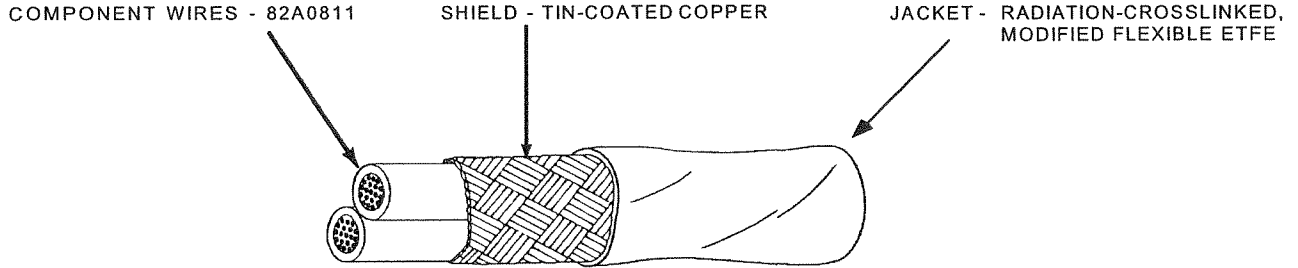

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inch)		OUTSIDE DIAMETER (inch)		MAXIMUM WEIGHT (lb/1000 ft)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
82A1821-24-*	24	38	.006	.010	.125	.131	12.5
82A1821-22-*	22	38	.007	.011	.147	.154	16.8
82A1821-20-*	20	38	.008	.012	.169	.177	21.8
82A1821-18-*	18	38	.009	.013	.195	.205	29.9
82A1821-16-*	16	38	.009	.014	.229	.240	41.1
82A1821-14-*	14	38	.011	.016	.281	.295	61.8
82A1821-12-*	12	38	.012	.018	.327	.343	84.9
82A1821-10-*	10	36	.015	.023	.441	.463	150.

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 CROSSLINKING PROOF TEST: 300 ± 3°C for 7 hours
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 100% (minimum)
 Tensile Strength, 3000 lbf/in² (minimum)
 JACKET FLAWS:
 Spark Test, 1500 volts (rms), 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100% test

SHIELD COVERAGE: 85% (minimum)
 VOLTAGE WITHSTAND (POST ENVIRONMENTAL):
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER
 The "*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.
 Example: AWG 20, white and red component wires; white jacket: 82A1821-20-9/2-9

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

Raychem

300 Constitution Drive, Menlo Park, California 94025
 1-800-2-Raychem Fax: 1-650-361-6297