
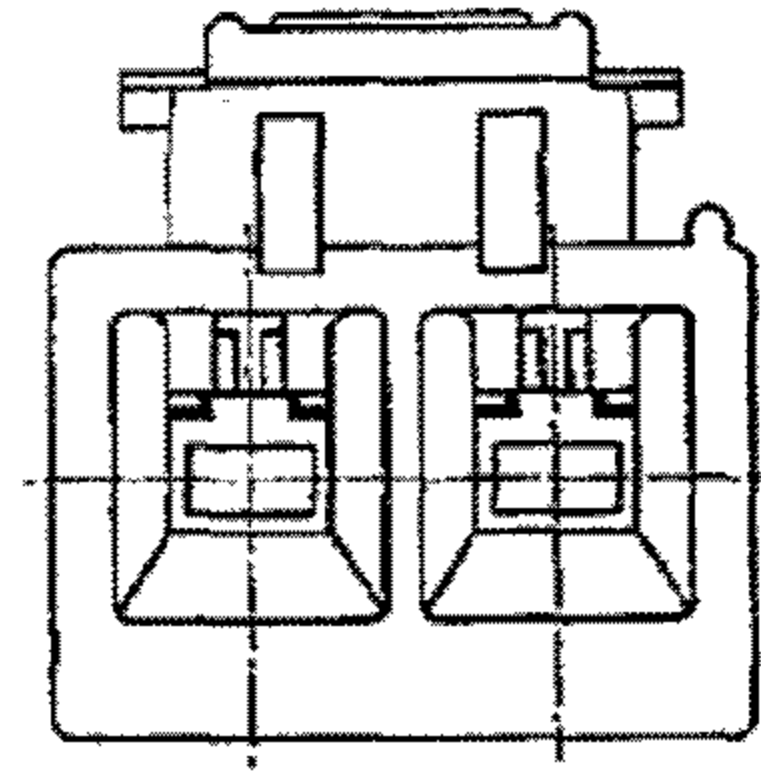
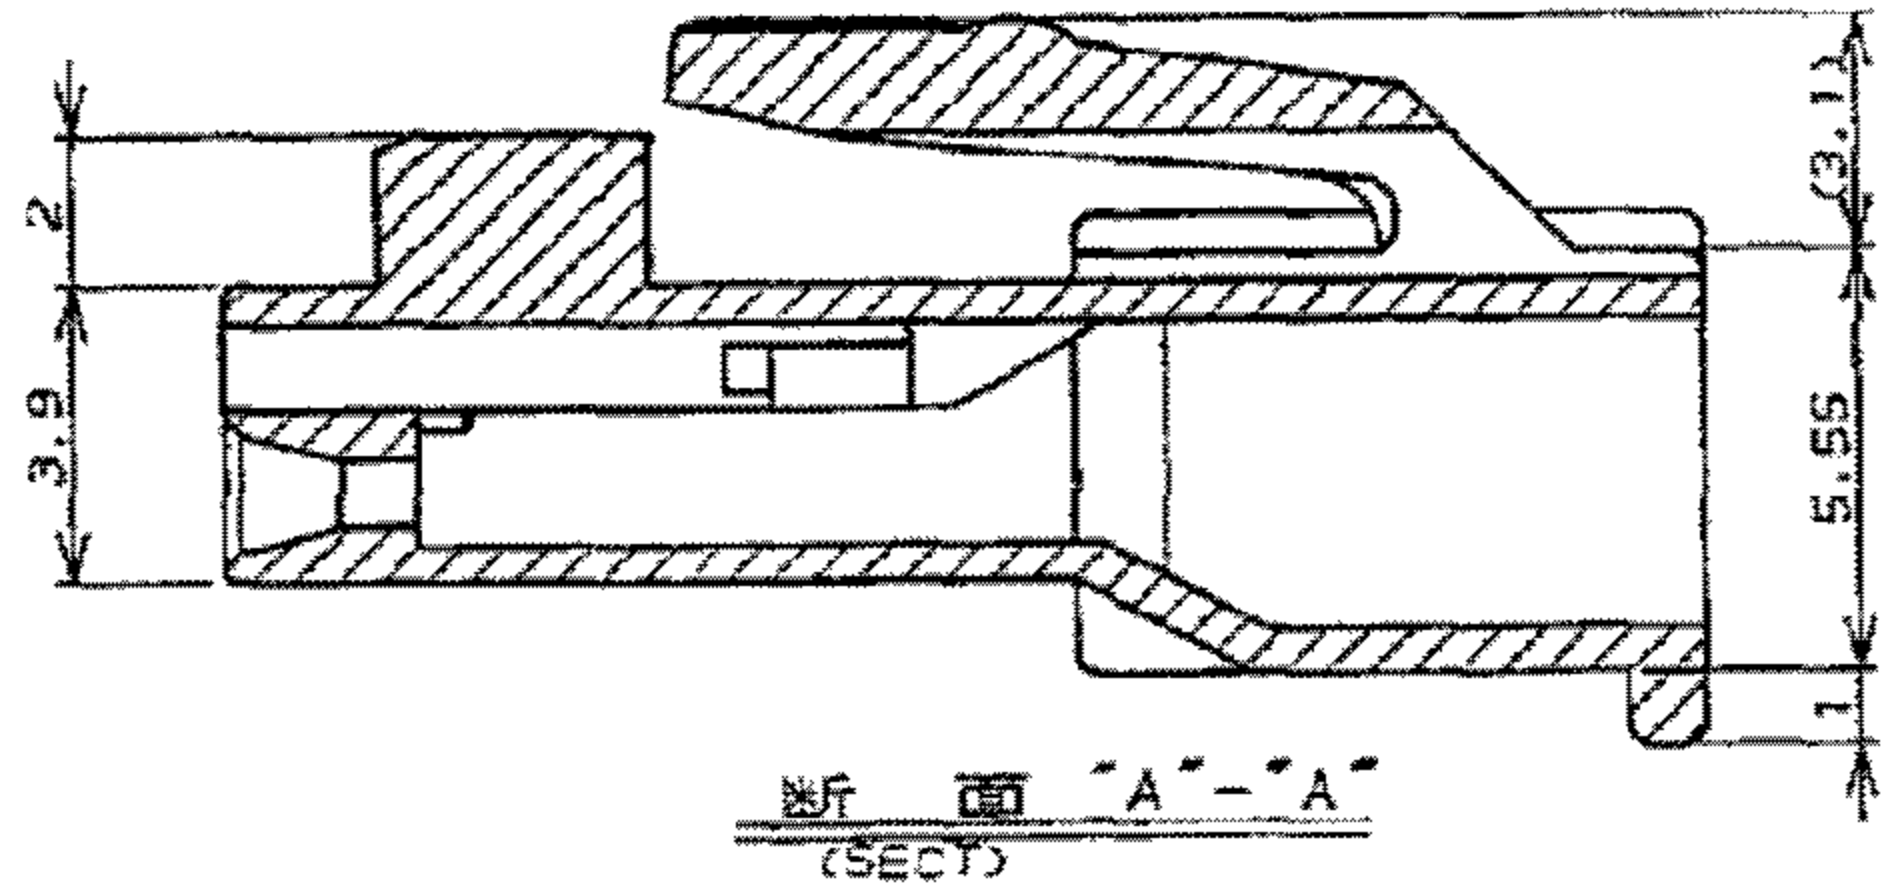
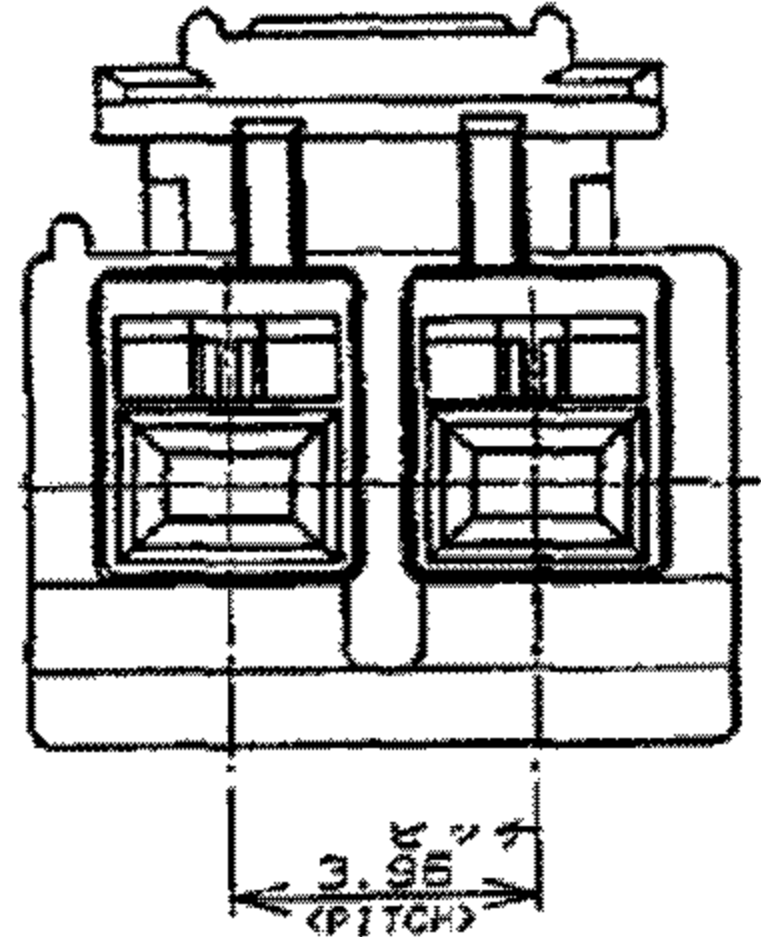


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
		C2		REVISED PER ECR-12-022089	27DEC2012	A.Z	F.M

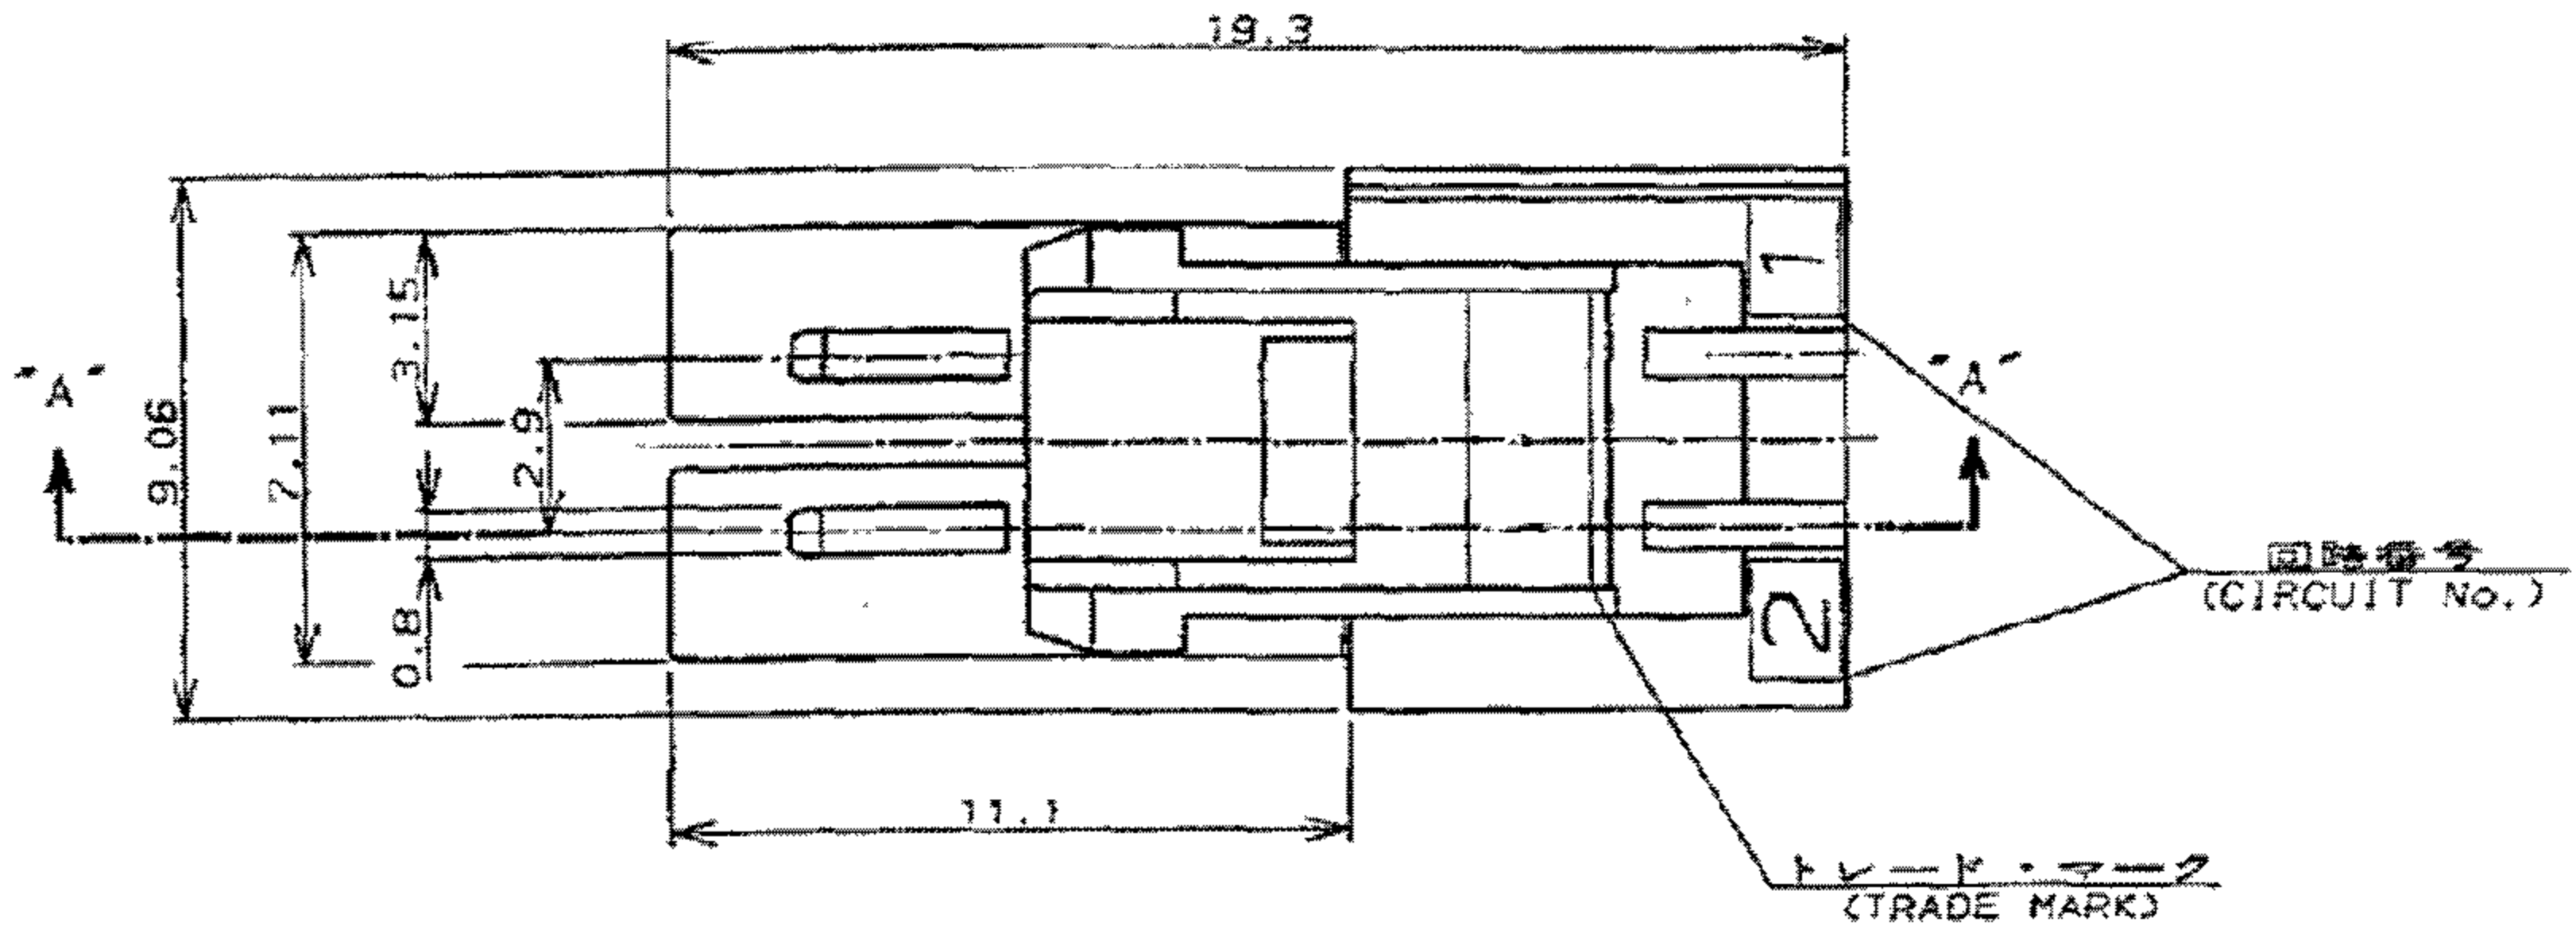

1-176282-1	130°C MAX	PA 6/6 ポリアミド 6/6	NATURAL 自然色	2	1-176271-1 ²	
176282-□ 176292-□	105°C MAX	PA 6/6 ポリアミド 6/6	BLACK 黒 BLUE 青 YELLOW 黄 RED 赤 NATURAL 自然色		176271-9 176271-6 176271-4 176271-2 176271-1	
MATING CONN. PART NUMBER 嵌合相手型番	TEMPERATURE RATING 定格温度	TYPE 種類	HOUSING COLOR 色		Pos. 極数	PART NUMBER 型番
MATERIAL 材料						

1. APPLICABLE CONTACT PART NUMBER;
 REC CONTACT: 175152-□ (#20-#16AWG)
 175151-□ (#26-#22AWG)
- ² TO BE USED WITH THE CONTACT WHICH IS RATED 105°C MAX
1. 適用端子型番;
 リセコンタクト: 175152-□ (#20-#16AWG)
 175151-□ (#26-#22AWG)
- ² 適用コンタクトの使用温度は最大105°C

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	M.SHINDO	08NOV1989	STE TE Connectivity
CHK	Y.FUJITA	08NOV1989	
APVD	Y.FUJITA	08NOV1989	
PRODUCT SPEC	108-5302		
APPLICATION SPEC			NAME AMP UNIVERSAL POWER CONN. 3.96mm PITCH PLUG HOUSING 2 Pos. (SGL ROW) AMP ユニバーサルパワーコネクタ 2極 3.96mmピッチ キャップハウジング
MATERIAL	SEE TABLE		SIZE A3
			CAGE CODE 00779
			DRAWING NO C-176271
			RESTRICTED TO —
			CUSTOMER DRAWING
			SCALE NTS
			SHEET 1 OF 1
			REV C1