
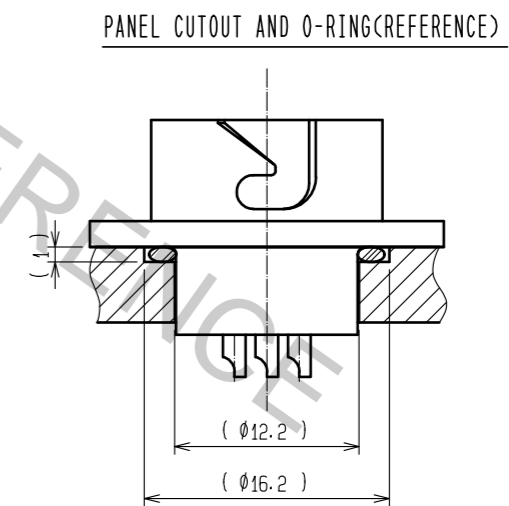
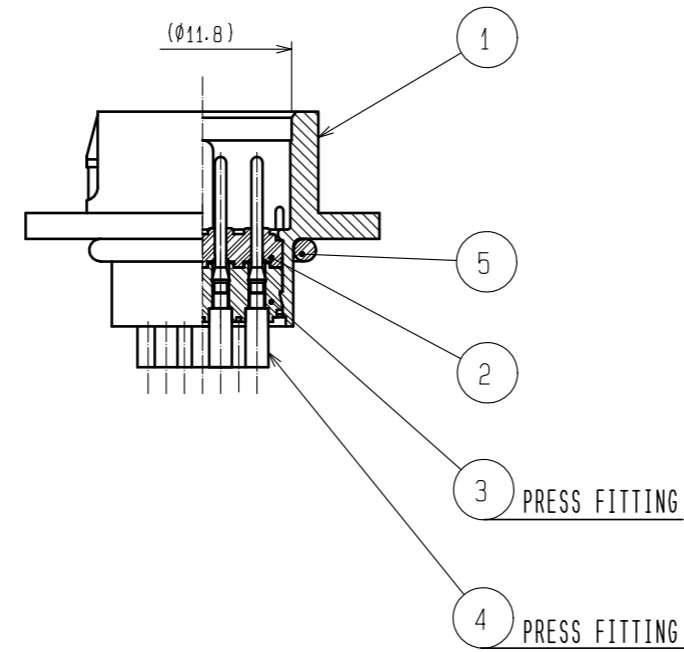
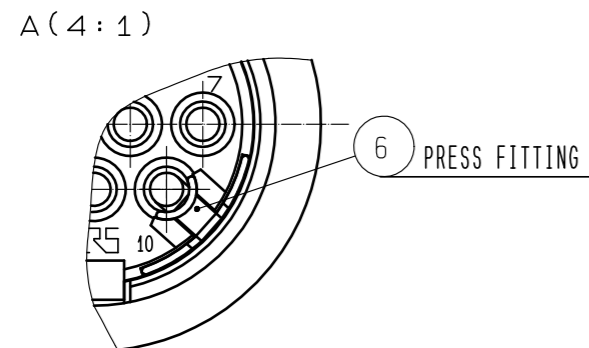
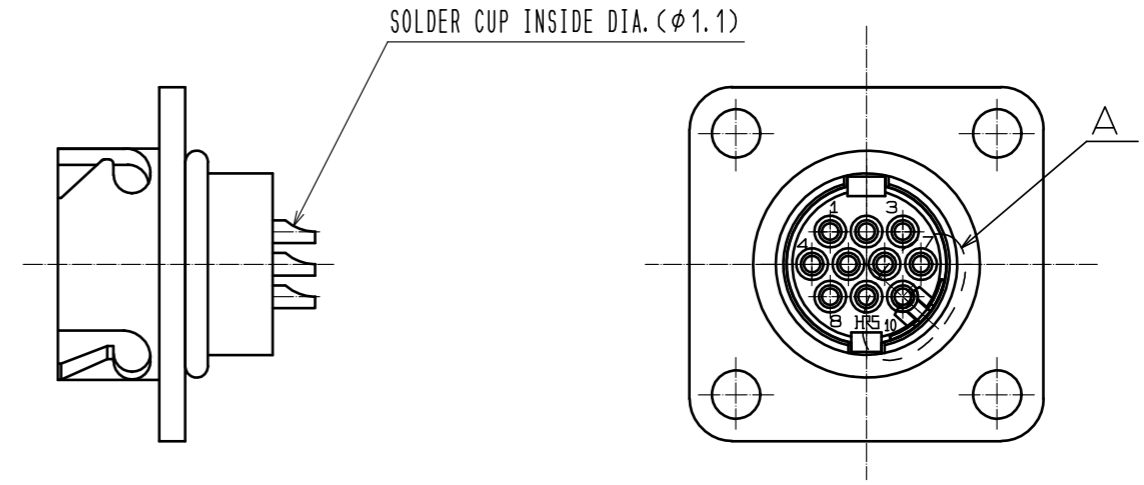
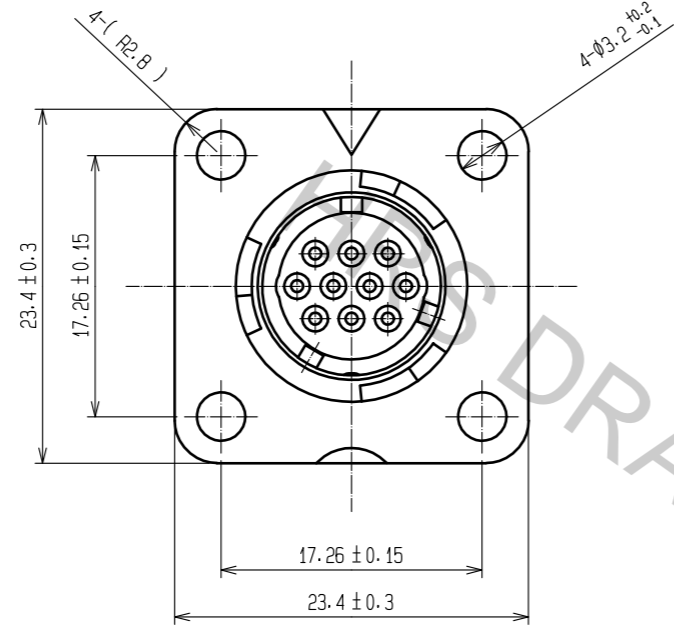


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

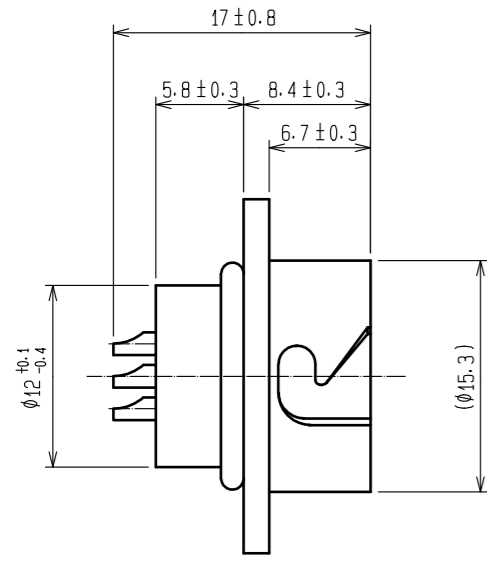

NOTES 1 SURFACE:GOLD PLATING 0.2µm min.
 UNDER PLATING:NICKEL PLATING 2µm min.
 2 CHECK THAT THE O-RING IS PROPERLY SET AT THE GROOVE OF THE DEVICE.
 WHILE MOUNTING THE CONNECTOR,MAKE SURE THAT THE O-RING IS NOT CAUGHT.

3	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	6	PHOSPHOR BRONZE	NICKEL PLATING			
2	ACRYLONITRILE BUTADIEN RUBBER	(BLACK)	5	ACRYLONITRILE BUTADIEN RUBBER	(BLACK) (DIA. Ø 1.5)			
1	ZINC ALLOY	NICKEL PLATING	4	BRASS	1			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS	mm	SCALE	2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED	·HY. KOBAYASHI	18.02.26	DRAWING NO.	EDC-115623-31-00		
		CHECKED	·HY. KOBAYASHI	18.02.26	PART NO.	HR08D-12WR-10P(31)		
		DESIGNED	·DS. MATSUNE	18.02.24	CODE NO.	CL108-0218-4-31		
		DRAWN	·AI. NISHIYAMA	18.02.16				1/1