
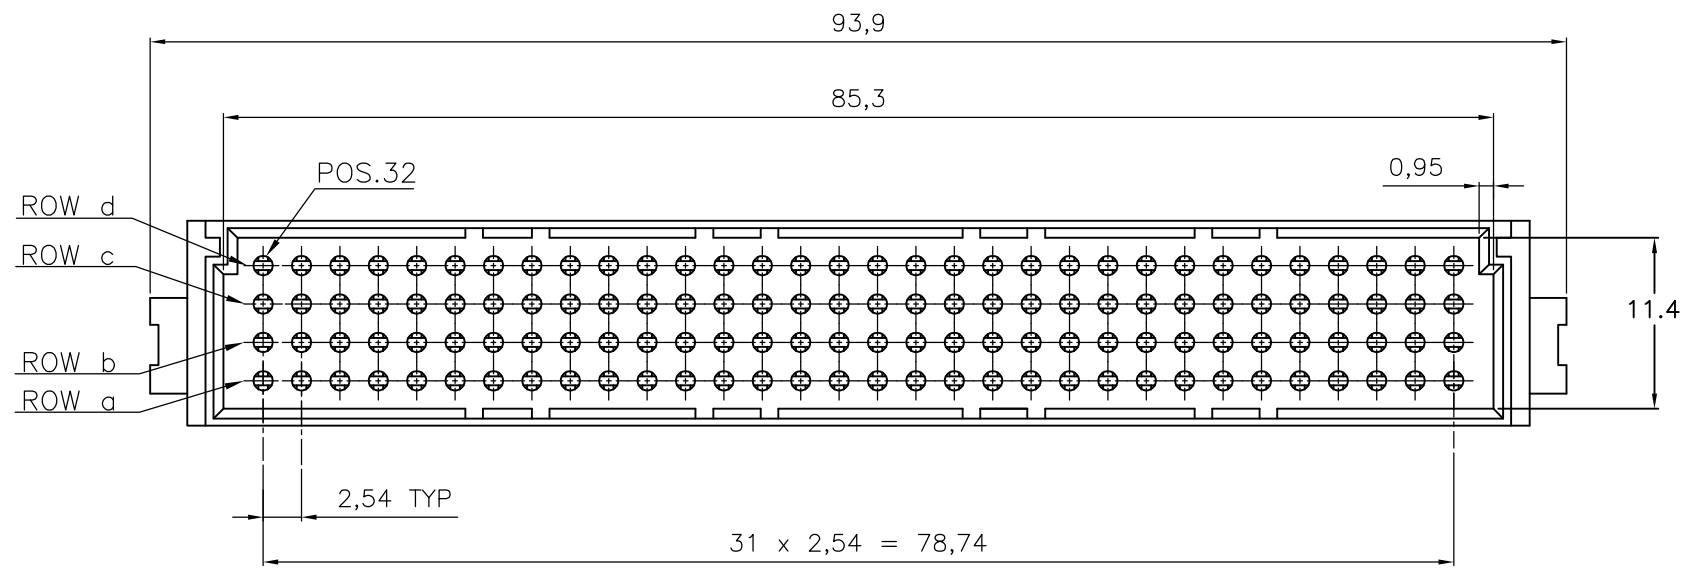


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 2011 By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
-	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	A2	REV PER ECO-11-023621		29NOV2011	RG	BL

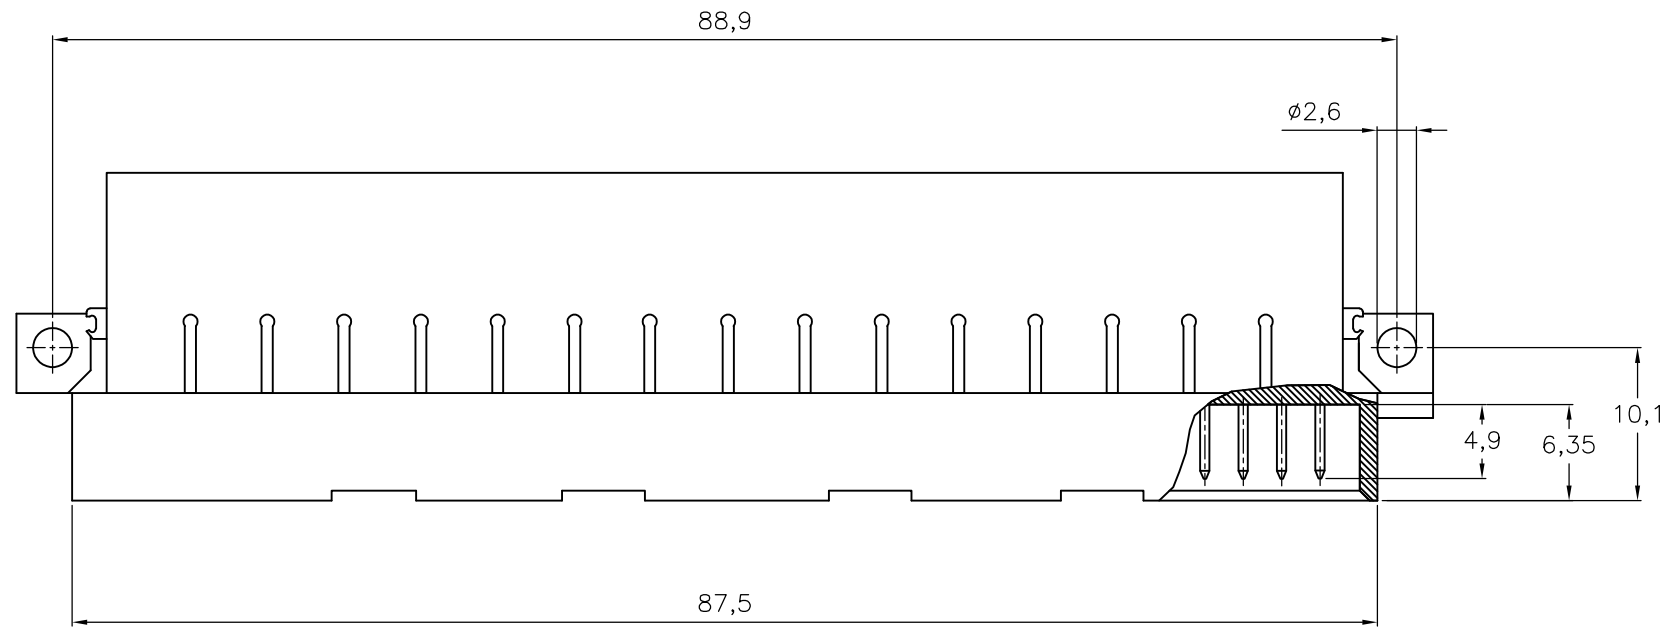

NOTES:

① MATERIAL:
 -HOUSING: THERMOPL. POLYESTER
 COLOUR : GREY
 -CONTACTS: BRASS

② PLATING CONTACT:
 PLATING AT INTERFACE TO MEET CLASS II PERFORMANCE
 CRITERIA OF DIN 41612 SPECIFICATION
 Sn OVER 1.25µm Ni AT PCB INTERFACE

③ SOLDERPOSTS SUITABLE FOR P.C.B HOLES
 0,8 ±0,05 OR 1,0±0,1 DIA.

ROW d	x x
ROW c	x x
ROW b	x x
ROW a	x x
POS	32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

AN ASTERISK „X” DENOTES A CONTACT.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.v.L./Grzybowski	30NOV2011	STE TE Connectivity
DIMENSIONS: mm		CHK -		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R.FIJTEN	18NOV00	NAME 128 POSITION C MALE SOLDER CONNECTOR
0 PLC ± -		PRODUCT SPEC -		
1 PLC ± -		APPLICATION SPEC -		SIZE CAGE CODE DRAWING NO RESTRICTED TO
2 PLC ± -		WEIGHT -		
3 PLC ± -		CUSTOMER DRAWING		A3 00779 C-106739
4 PLC ± -		SCALE NTS SHEET 1 OF 1 REV A2		
ANGLES ± -				
FINISH -				