


NOTES 1: If there are pattern and a bia hole on part, there is a possibility that it will make contact with the leads.
 2: Lead co-planality include reinforced metal fittings shall be 0.1mm MAX.

Part No.	Number of contacts	Code No.	A	B	C
DF 13EA-10DP-1.25V(25)	10	CL536-0570-0-25	12.1	5.0	8.7
DF 13EA-20DP-1.25V(25)	20	CL536-0571-0-25	18.35	11.25	14.95
DF 13EA-30DP-1.25V(25)	30	CL536-0572-0-25	24.60	17.50	21.20

2	Brass	Surface: Tin-copper plated 1μm MIN	5	S. PVC	Gray
		Under plating: Nickel 0.5μm MIN	4	R. PVC	Electrostatic protection
1	Polyamide	Beige, UL94V-0	3	Phosphor bronze	Tin plated 1μm MIN
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT 4	DESCRIPTION OF REVISIONS DIS-H-00002325	
APPROVED : HS. OKAWA 16.05.16			DESIGNED	CHECKED	
CHECKED : TS. FUKUSHIMA 16.05.14			MI. SAKIMURA	TS. FUKUSHIMA	
DESIGNED : YK. YAMAGUCHI 16.05.14			DATE 16.11.21		
DRAWN : MI. SAKIMURA 16.05.13			DRAWING NO. EDC-367982-25-00		
PART NO. DF13EA-*DP-1.25V(25)			CODE NO. CL536-		

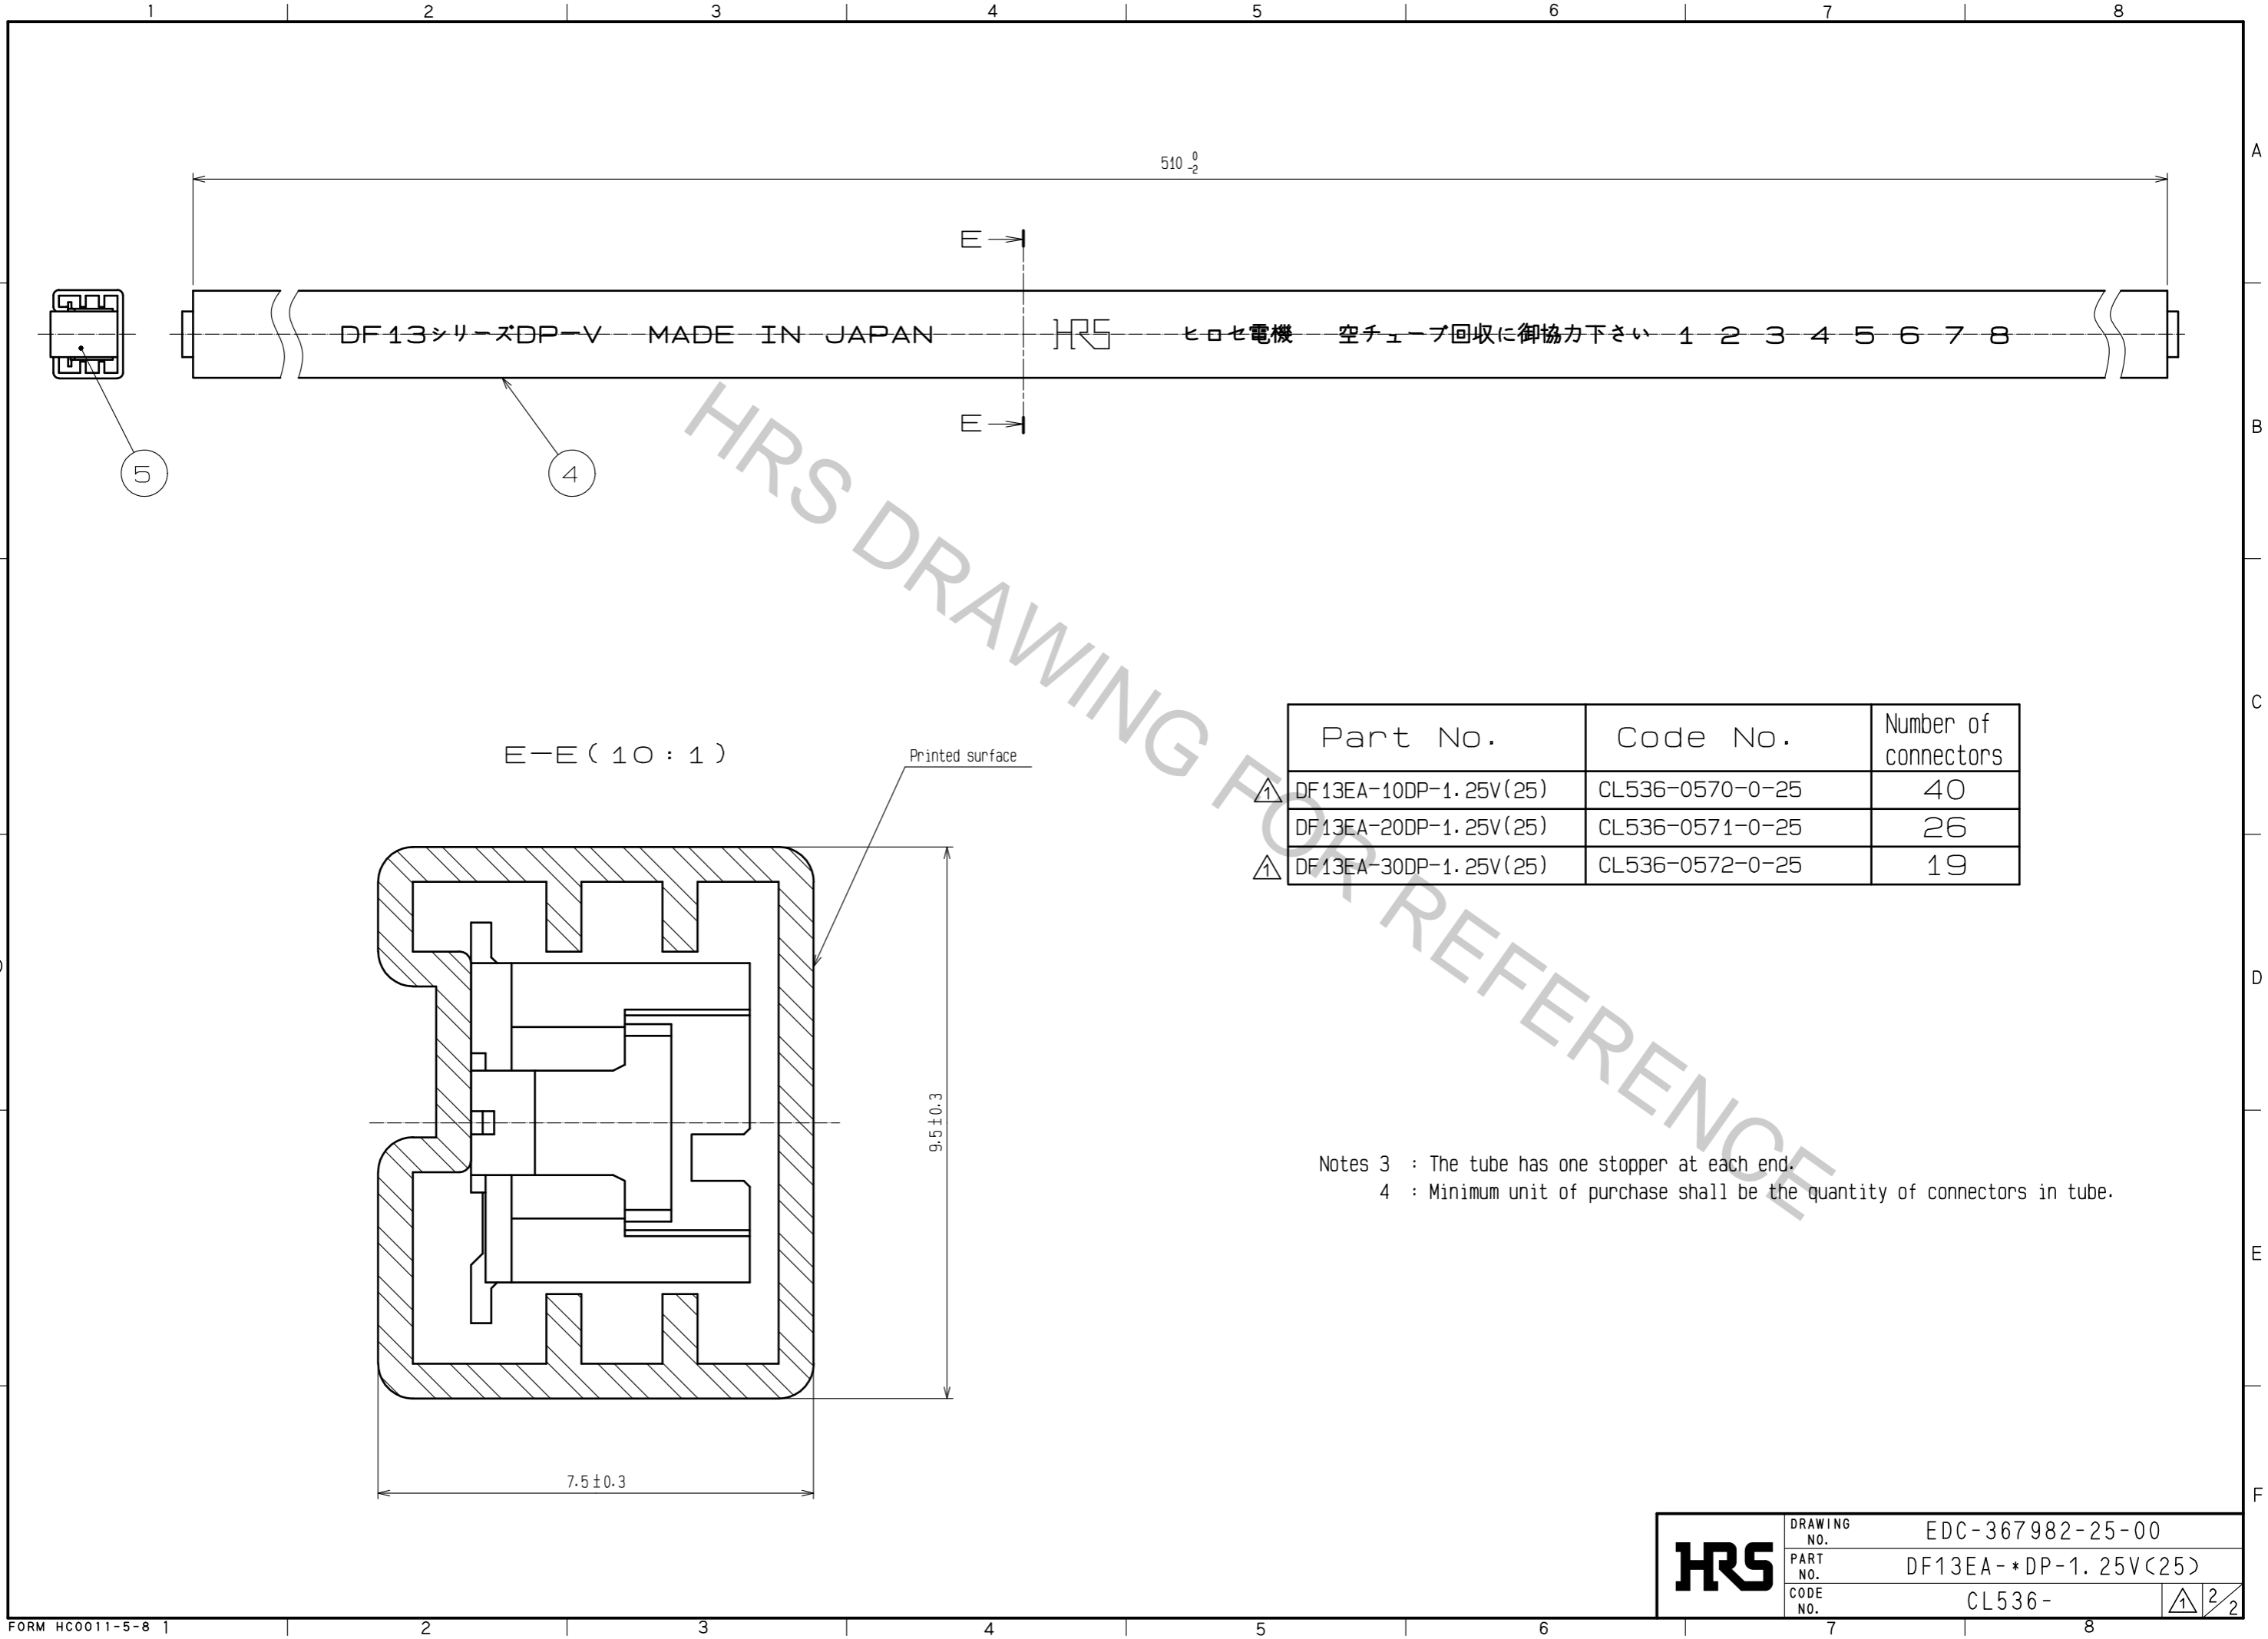

Part No.	Code No.	Number of connectors
DF13EA-10DP-1.25V(25)	CL536-0570-0-25	40
DF13EA-20DP-1.25V(25)	CL536-0571-0-25	26
DF13EA-30DP-1.25V(25)	CL536-0572-0-25	19

Notes 3 : The tube has one stopper at each end.
 4 : Minimum unit of purchase shall be the quantity of connectors in tube.

HRS	DRAWING NO.	EDC-367982-25-00	
	PART NO.	DF13EA-*DP-1.25V(25)	
	CODE NO.	CL536-	2/2