


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
OFF	NONE	ON
OPEN	N/A	1-1a, 2-2a

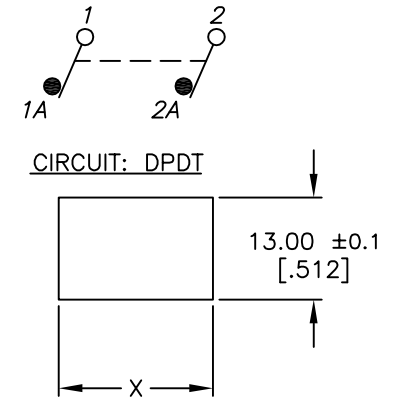

RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	X
0.75-1.25 [0.030-.049]	19.2 [0.756]
1.25-2.0 [0.049-.079]	19.4 [0.764]
2.0-3.0 [0.079-.118]	19.8 [0.780]

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- RATING: 6A @250VAC;9A @125VAC (UL, CSA, VDE)
- CONTACT RESISTANCE: 20mILLIOHMS TYP. INITIAL
- INSULATION RESISTANCE: 1000MegaOHMS
- DIELECTRICAL STRENGTHS 1500V RMS min. @SEA LEVEL
3000V RMS @SEA LEVEL
- MECHANICAL LIFE: 30,000 CYCLES.
- ELECTRICAL LIFE: 10,000 CYCLES.

E-SWITCH®

B	22571	ADDED SWITCH FUNCTION CHART	10/28/16	MJR
A	12260	RELEASED FOR PRODUCTION	6/24/02	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE				
R1973B BLK BLK GLD (Left Angle)				
SCALE	DATE	DR	DWG	REV
1.5:1	6/24/02	MM	M400061	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED