THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

VERWENDET FÜR
E 93-52506

LOC	DIST
A1	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	PLATING CHANGE TO PdNi + Au FLASH AT AREA F	14MAY2014	KJK	JK

POS. "n".	L -0.5	PART NO.	
–	–		–
–	–		–
3	7.12	966 073	-3
4	9.66		-4
5	12.20		-5
6	14.74		-6
7	17.28		-7
8	19.82		-8
9	22.36		-9
10	24.90	1-	-0
11	27.44	1-	-1
12	29.98	1-	-2
13	32.52	1-	-3
14	35.06	1-	-4
15	37.60	1-	-5
16	40.14	1-	-6
17	42.68	1-	-7
18	45.22	1-	-8
19	47.76	1-	-9
20	50.30	2-	-0
21	52.84	2-	-1
22	55.38	2-	-2
23	57.92	2-	-3
24	60.46	2-	-4
25	63.00	2-	-5
26	65.54	2-	-6
27	68.08	2-	-7
28	70.62	2-	-8
29	73.16	2-	-9
30	75.70	3-	-0
31	78.24	3-	-1
32	80.78	3-	-2
33	83.32	3-	-3
34	85.86	3-	-4
35	88.40	3-	-5
36	90.94	~~3-966 073-6~~	OBSOLETE

△2 OBSOLETE

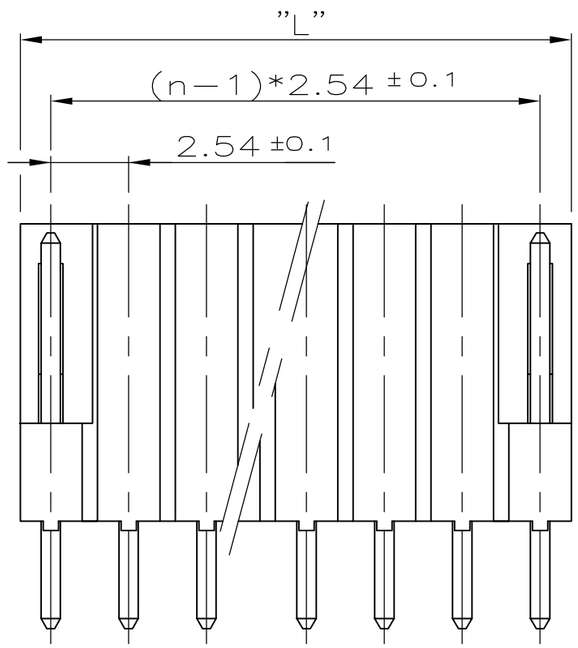

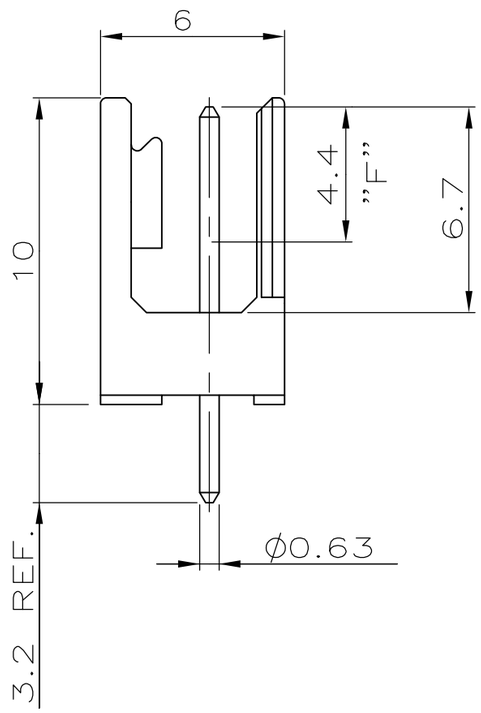

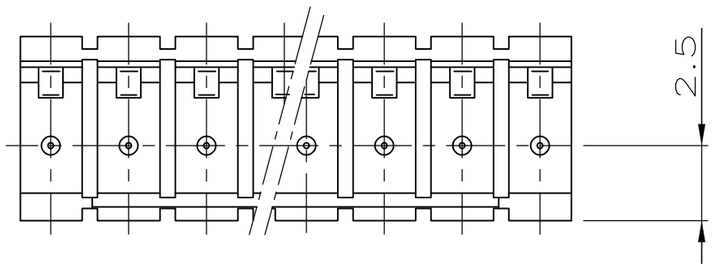

△1 MATING SIDE CONTACT AREA F:
MIN. 0.7µm PdNi + 0.1µm Au FLASH OVER 1.27µm Ni
SOLDER SIDE: MIN. 3.0µm TIN OVER 1.27µm Ni

△2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

CONTACT PIN	CuZn	△1
HOUSING	PCT	BLACK
DESCRIPTION	MATERIAL	FINISH
		COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
±0.2mm
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: SEE TABLE

FINISH: SEE TABLE

DWN A.HO 19.01.93
CHK M.SCHAARSCHMIDT –
APVD –
PRODUCT SPEC 108-18012
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME
AMPMODU II PIN HEADER,
SINGLE ROW,WITH POLARIZATION

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-966073	–

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV B

1470-19 (3/11)
15MAY2014