



# SAW Components

Data Sheet B3646





**SAW Components**

**B3646**

**Low-Loss Filter**

**208,0 MHz**

**Data Sheet**


Ceramic package **QCC10B**

**Features**

- Low-loss wideband IF filter
- No matching required for operation at 50 Ω
- Package for Surface Mounted Technology (SMT)

**Terminals**


- Gold-plated

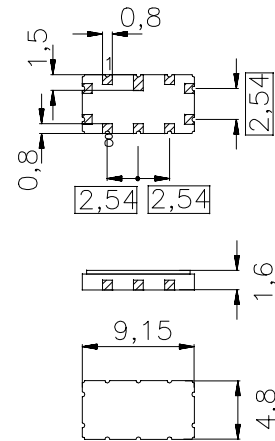

Dimensions in mm, approx. weight 0,2 g

**Pin configuration**

- |            |               |
|------------|---------------|
| 10         | Input         |
| 9          | Input ground  |
| 5          | Output        |
| 4          | Output ground |
| 2, 7       | Ground        |
| 1, 3, 6, 8 | Case – ground |

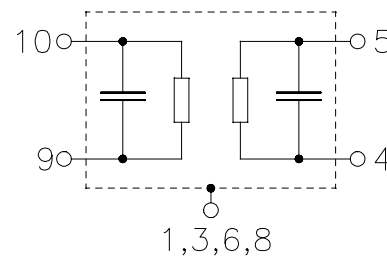

Type	Ordering code	Marking and Package according to	Packing according to
B3646	B39211-B3646-Z710	C61157-A7-A49	F61074-V8172-Z000

Electrostatic Sensitive Device (ESD)

**Maximum ratings**

Operable temperature range	$T$	- 25/+ 85	°C
Storage temperature range	$T_{stg}$	- 40/+ 125	°C
DC voltage	$V_{DC}$	0	V
Source power	$P_s$	10	dBm


**SAW Components**
**B3646**
**Low-Loss Filter**
**208,0 MHz**
**Data Sheet**
**Characteristics**

Operating temperature:  $T_A = -10 \dots +85 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 50 \text{ } \Omega$   
 Terminating load impedance:  $Z_L = 50 \text{ } \Omega$


		min.	typ.	max.	
<b>Nominal frequency</b>	$f_N$	—	208,0	—	MHz
<b>Maximum insertion attenuation</b>	$f_N \pm 400 \text{ kHz}$ $\alpha_{\max}$	1,5	2,0	3,5	dB
<b>Passband width</b>	$\alpha_{\text{rel}} \leq 1,0 \text{ dB}$ $B_{1,0\text{dB}}$	—	5,08	—	MHz
<b>Amplitude ripple (p-p)</b>	$f_N \pm 100 \text{ kHz}$ $\Delta\alpha$	—	0,03	0,2	dB
<b>Amplitude ripple (p-p)</b>	$f_N \pm 400 \text{ kHz}$ $\Delta\alpha$	—	0,1	1,0	dB
<b>Absolute group delay (at <math>f_N</math>)</b>	$\tau$	—	120	300	ns
<b>Group delay ripple (p-p)</b>	$f_N \pm 400 \text{ kHz}$ $\Delta\tau$	—	8	30	ns
<b>Relative attenuation (relative to <math>\alpha_{\max}</math>)</b>	$\alpha_{\text{rel}}$				
10,0 MHz ... $f_N - 33,0 \text{ MHz}$		38,0	50,0	—	dB
$f_N - 33,0 \text{ MHz}$ ... $f_N - 23,0 \text{ MHz}$		44,0	50,0	—	dB
$f_N - 23,0 \text{ MHz}$ ... $f_N - 14,0 \text{ MHz}$		30,0	40,0	—	dB
$f_N - 14,0 \text{ MHz}$ ... $f_N - 0,4 \text{ MHz}$		0,0	2,0	—	dB
$f_N + 0,4 \text{ MHz}$ ... $f_N + 14,0 \text{ MHz}$		0,0	2,0	—	dB
$f_N + 14,0 \text{ MHz}$ ... $f_N + 28,0 \text{ MHz}$		5,0	35,0	—	dB
$f_N + 28,0 \text{ MHz}$ ... 450,0 MHz		12,0	45,0	—	dB
<b>Input IP3 (Third order intercept point)<sup>1)</sup></b>		45,0	—	—	dBm
<b>VSWR</b>	$f_N \pm 400 \text{ kHz}$	—	1,5:1	2,0:1	
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-70	—	ppm/K

1) With two 10 dbm fundamental signals at 180 MHz and 208 MHz applied the third order intermodulation product at the output at 236 MHz will have less than -64 dBm.




Data Sheet

Transfer function

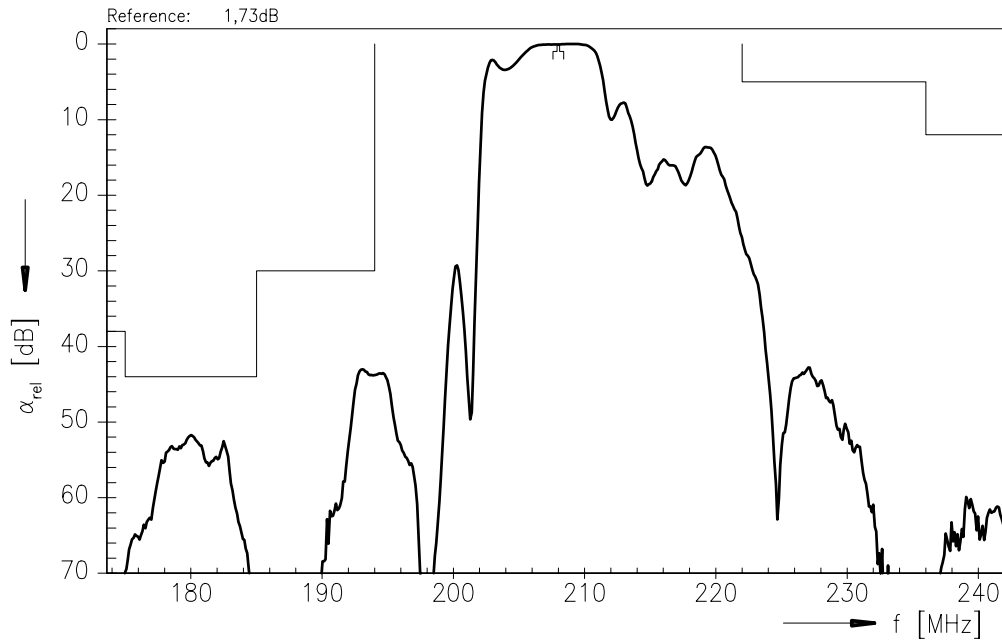

Transfer function (pass band)

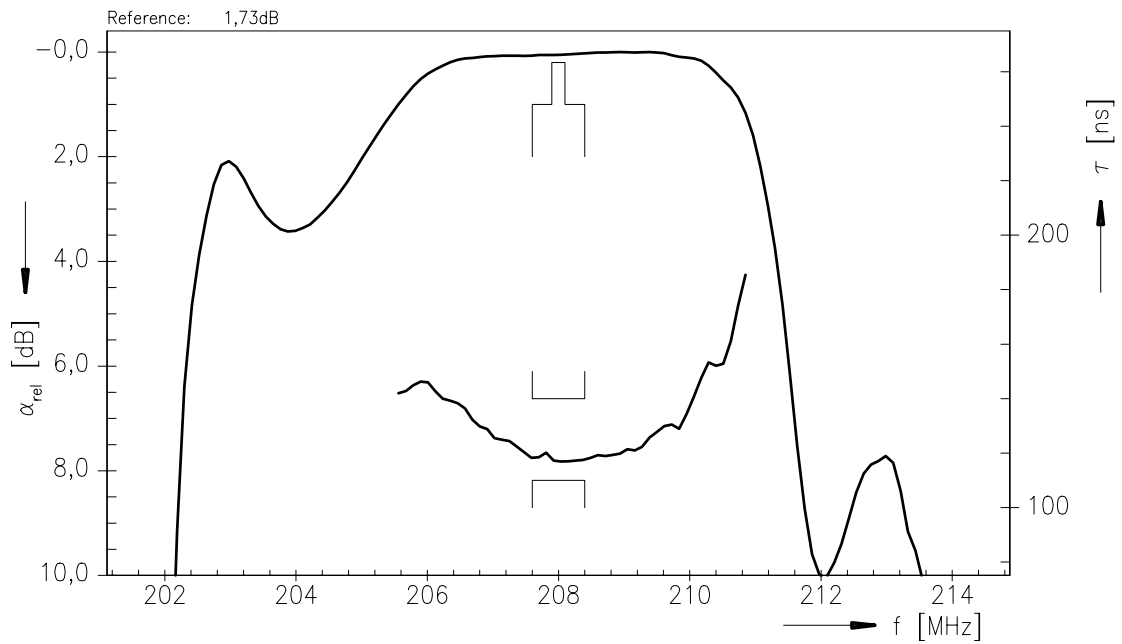



**SAW Components**

**B3646**

**Low-Loss Filter**

**208,0 MHz**

Data Sheet

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW MC IS**

**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2003. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.