

Surge protection plug - CT 10-18FS+F/PE-24 - 2807926

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




LSA-PLUS plug (COMTRAB CT 10) with coarse/fine surge protection for 18 signal lines - GND and GND - PE coarse protection. Nominal voltage: 24 V DC. Version: 10 double wires.

Why buy this product

- For use with CT-TERMIBLOCK and with LSA-PLUS and LSA-PROFIL disconnect and control strips
- Multi-position, plug-in modular design
- Applications include systems with higher signal voltages
- Combined protective circuits
- Protection modules must be inserted in the correct direction



Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 075408
GTIN	4017918075408

Technical data

Dimensions

Height	22 mm
Width	111 mm
Depth	68.5 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 75 °C
Altitude	≤ 2000 mm (amsl (above mean sea level))
Degree of protection	IP20

General

Housing material	PBT
Flammability rating according to UL 94	V-0

Surge protection plug - CT 10-18FS+F/PE-24 - 2807926

Technical data

General

Color	jet black RAL 9005
Standards for clearances and creepage distances	VDE 0110-1
Mounting type	On CT-TERMIBLOCK and LSA-PLUS disconnect strip
Type	LSA-PLUS module
Direction of action	Line-Signal Ground/Shield & Signal Ground/Shield-Earth Ground
Arrester can be tested with CHECKMASTER from software version:	From SW rev. 1.00

Protective circuit

IEC test classification	C1
	C2
	C3
	D1
Nominal voltage U_N	24 V DC
	24 V AC
Maximum continuous voltage U_C	40 V DC
	28 V AC
Rated current	1.5 A AC (75 °C)
	350 mA DC (75 °C)
Operating effective current I_C at U_C	$\leq 5 \mu\text{A}$ (18x)
Residual current I_{PE}	$\leq 1 \mu\text{A}$ (19x)
Nominal discharge current I_n (8/20) μs (line-line)	119 A (per path)
Nominal discharge current I_n (8/20) μs (line-earth)	5 kA (per path)
Nominal discharge current I_n (8/20) μs (signalground-earth)	5 kA (per path)
Pulse discharge current I_{imp} (10/350) μs (line-earth)	2.5 kA
Pulse discharge current I_{imp} (10/350) μs (signalground-earth)	2.5 kA
Total discharge current I_{total} (8/20) μs	10 kA
Max. discharge current I_{max} (8/20) μs maximum (line-line)	119 A (per path)
Max. discharge current I_{max} (8/20) μs maximum (line-earth)	5 kA (per path)
Nominal pulse current I_{an} (10/1000) μs (line-signalground)	23 A
Output voltage limitation at 1 kV/ μs (line-earth) spike	$\leq 650 \text{ V}$
Output voltage limitation at 1 kV/ μs (line-signalground) spike	$\leq 70 \text{ V}$
Output voltage limitation at 1 kV/ μs (line-signalground) static	$\leq 60 \text{ V}$
Residual voltage at I_n (line-earth)	$\leq 30 \text{ V}$
Residual voltage at I_n (line-signalground)	$\leq 85 \text{ V}$
Residual voltage with I_{an} (10/1000) μs (line-signalground)	$\leq 65 \text{ V}$
Response time t_A (line-signalground)	$\leq 1 \text{ ns}$
Response time t_A (line-earth)	$\leq 100 \text{ ns}$
Input attenuation aE, asym.	typ. 0.1 dB ($\leq 2 \text{ MHz} / 50 \Omega$)
	typ. 0.1 dB ($\leq 200 \text{ kHz} / 150 \Omega$)
	typ. 0.1 dB ($\leq 80 \text{ kHz} / 600 \Omega$)

Surge protection plug - CT 10-18FS+F/PE-24 - 2807926

Technical data

Protective circuit

Cut-off frequency fg (3 dB), asym. (GND) in 50 Ohm system	typ. 10 MHz
Cut-off frequency fg (3 dB), asym. (GND) in 150 Ohm system	typ. 2.5 MHz
Cut-off frequency fg (3 dB), asym. (GND) in 600 Ohm system	typ. 650 kHz
Capacity (line-signalground)	typ. 1.1 nF (1 MHz)
Surge protection fault message	none
Impulse durability (line-earth)	C2 - 10 kV/5 kA
	D1 - 2.5 kA
Impulse durability (line-signalground)	C3 - 23 A
Impulse durability (signalground-earth)	D1 - 2.5 kA

Connection data

Connection method	can be plugged into COMTRAB-TERMIBLOCK and LSA-PLUS disconnect and switching strips
Connection method IN	COMTRAB plug-in system
Connection method OUT	COMTRAB plug-in system

Standards and Regulations


Standards/specifications	IEC 61643-21 2000 + corrigendum 2001 + A1:2008, modified + A2:2012
	EN 61643-21 2001 + A1:2009 + A2:2013

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

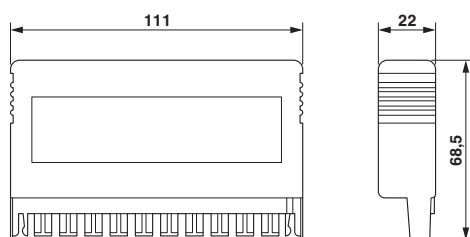

Circuit diagram

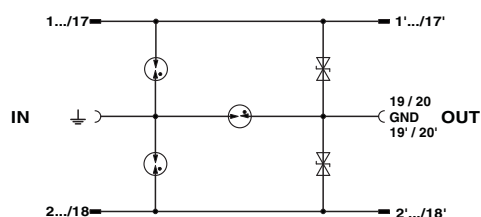

Approvals

Approvals

Approvals

EAC

Surge protection plug - CT 10-18FS+F/PE-24 - 2807926

Approvals

Ex Approvals

Approval details

EAC



RU C-
DE.A*30.B01561

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>