



Emergency stop KNA3-RS Part number 85100434



- "Emergency stop" and "mobile guard monitoring" functions
- Control device with one or two channels
- 3 "N/O" safety contacts with linked contacts-6A / 250 AC
- 1 "N/C" signalling contact
- Level 4 according to NF.EN 954-1
- Integrity check on control devices
- Separate return loop
- Four input circuits

	Type	Function	Level of safety	Safety contacts	Casing	Supply voltage	Connections	Weight (g)
85100036	KNA3-XS	Emergency stopMobile guard monitoring	3	3	22,5 mm	24 V ACDC	Screw terminals	310
85100037	KNA3-XS	Emergency stopMobile guard monitoring	3	3	22,5 mm	40 - 260 V AC	Screw terminals	310
85101036	KNAC3-XS	Emergency stopMobile guard monitoring	4	3	45 mm	24 V ACDC	Spring terminals	310
85101037	KNAC3-XS	Emergency stopMobile guard monitoring	4	3	45 mm	40 - 260 V AC	Spring terminals	310
85100436	KNA3-RS	Emergency stopMobile guard monitoring	4	3	45 mm	24 V ACDC	Screw terminals	310
85100434	KNA3-RS	Emergency stopMobile guard monitoring	4	3	45 mm	115 V AC	Screw terminals	410
85100435	KNA3-RS	Emergency stopMobile guard monitoring	4	3	45 mm	230 V AC	Screw terminals	410
85100536	KZP3-RS	Emergency stopMobile guard monitoring	4	3	45 mm	24 V ACDC	Screw terminals	410

Supply voltage

On/off indication 1 power supply voltage LED

Type

Breaking capacity (V resistive)	1500 VA
Max. breaking current	6,82 A
Max. breaking voltage	440 V AC
Electrical endurance	10 ⁵ operations at 1500 VA resistive 5x10 ⁵ operations at 500 VA resistive
Mechanical life (operations)	10 ⁷

On/off indication

Operating temperature (°C) IEC 68-2-14	0 →+50
Storage temperature (IEC 68-2-12) (°C)	-20 →+70
Internal voltage	24 V DC

fast transients

Drop-out / short breaks / microbreaks	Un-30% for 10 ms every 1 s Un-60% for 100 ms every 1 s according to IEC 61496-1/97 Un-100% for 10 ms every 100 ms Un-50% for 20 ms every 200 ms Un-50% for 500 ms every 5 s
Material	Polycarbonate Self-extinguishing-UL94 class VO
Protection Housing	IP 40
Degree of terminal protection	IP 20
Connection capacity	2 x 1,5 mm ² multicore with ferrule 2 x 2,5 mm ² solid conductor
Spring terminals, 2 terminals per connection point - rigid wire	2,5 mm ²
Spring terminals, 2 terminals per connection point - flexible wire	1,5 mm ²

Operating range

Reset time

Maximum response time on emergency stop < 50 ms

Number of safety circuits

Number of data circuits 1 "NC" AgSnO contacts

Max. absorbed power

Dielectric strength 2,95 kV according to CEI 664-1
Resistance to tracking Material group III

Radiated electromagnetic field


Electrostatic discharge 8 kV in the air acc. to IEC 1000.4.2
KNA3-RS / KZP3-RS: 15 kV in the air acc. to IEC 1000.4.2
Shock waves
KNA3-XS:
- Common mode 1 kV acc. to IEC 1000.4.5 KNA3-RS / KZP3-RS:
- Level 3 acc. to IEC 1000.4.5
- Common mode 2kV for 24 V and 24 V

Radio frequencies in common mode	- Common mode 4 kV for 230 V (2 kV residual current mode for KNA3-RS) KNA3-XS: - 10 V rms Level 3 according to IEC 1000.4.6 - 150 KhZ TO 80 MHz (ENV 50141) according to IEC 1000.4.11 KNA3-RS / KZP3-RS: - 30 Vrms Level X acc. to IEC 1000.4.6 150 kHz to 80 MHz (ENV 50141) according to IEC 1000.4.11
----------------------------------	---


European "Machinery" Directive 89/392/EEC

French decree 92/765-766-768	•
European "Usage" Directive 89/655/EEC	•
French decree 93-40 /93-41	•
IEC 61496-1	•
IEC 664-1	•
En 50081-2	•
EN 50082-2	•
EN 60204-1	•
EN 292-1 and 2	•
Safety category to EN 954-1	Catégorie 4
EN 418	•
EN 1088	•
UL 508	UL
C22-2N°14 M91	(c) UL
GS-ET-20	BG

Dimension Diagram : KNA3-RS / KZP3-RS

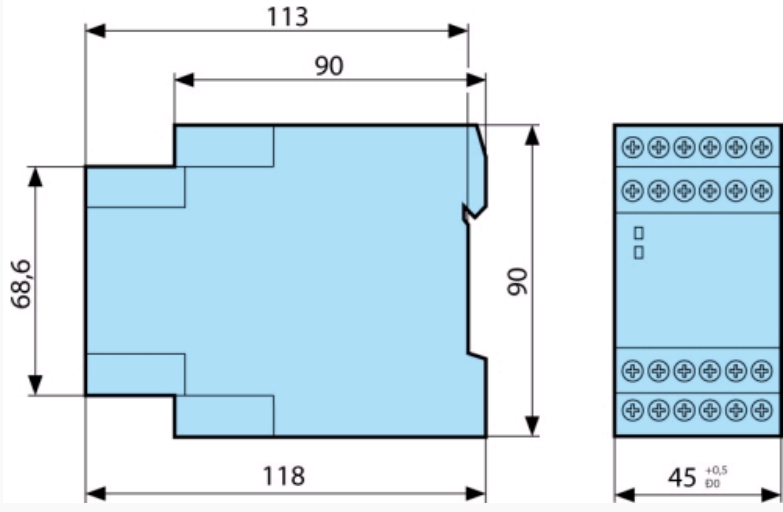

Dimension Diagram : Mounting - Removing

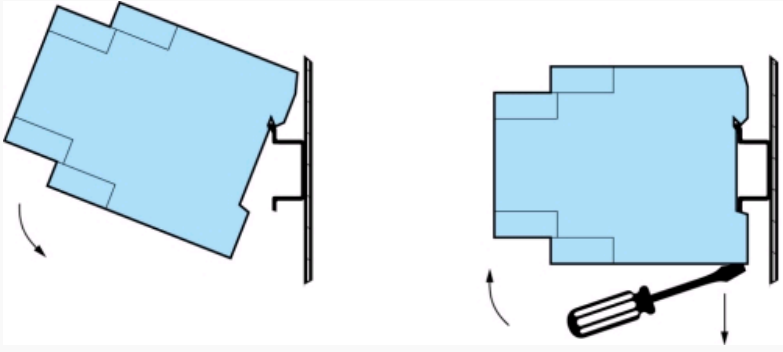

The KZP3-RS is used to obtain and maintain a category 4 level of safety for an installation with two control devices.

Depending on the degree of safety required, KNA3-XS / KNA3-RS / KZP3-RS can receive the following components as inputs:

- pushbutton for start or validation (Y1-Y2)
- emergency stop pushbuttons with one or two contacts (A1-A2)
one or two contacts (A1-A2)
two contacts KNA3-RS: Y11-Y12 and Y21-Y22,
two contacts KZP3-RS: Y11-Y12 / Y21-Y22 and Y31-Y32 / Y41-Y42
- position sensors (limit switches) with
one or two contacts (A1-A2)
two contacts KNA3-RS: Y11-Y12 and Y21-Y22,
two contacts KZP3-RS: Y11-Y12 / Y21-Y22 and Y31-Y32 / Y41-Y42


A positive break operation device must be used if a single channel is used.

To increase the degree of safety, one "N/C" auxiliary contact per power contactor is wired in series with the start (or validation) pushbutton, to ensure self-checking in this part of the installation.

The KNA3-XS has three "N/O" safety contacts (13-14/23-24/33-34) and one "N/C" signalling contact (41-42). One or more control devices may be wired up to the breaking capacity of the safety contacts: 1500 VA. However, to limit internal heating, it is advisable not to exceed 10 A thermal for all three contacts. The signalling contact can be wired on a PLC input or integrated into a fault signalling system.

The number of contacts can be extended and the breaking capacity thus increased. To do this, use the KZE3-XS.

KNA3-RS

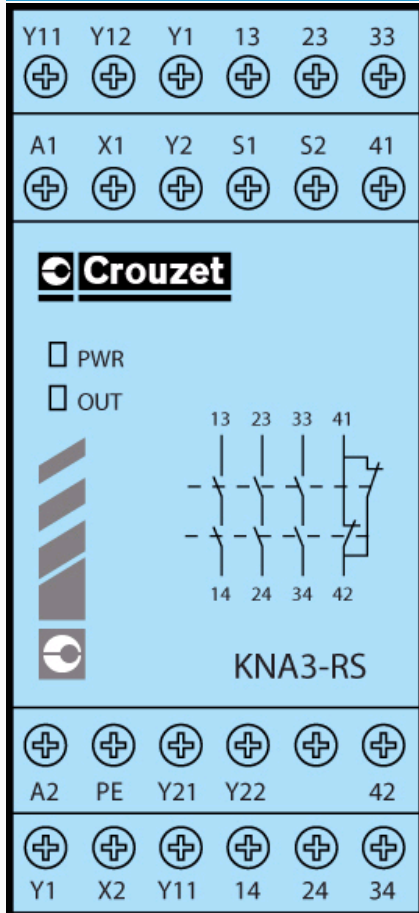

Lég.

A1-A2
Y11-Y12 / Y21-Y22
Y1-Y2
S1-S2
X1-X2
13-14/23-24/33-34
41-42

Legend

Power supply
Redundant inputs with differentiated voltage for control devices
Start/validation
Short-circuit protection on start / validation input
Return loop
"N/O" safety contacts
"N/C" signalling contacts