


TITLE	PART No.	REV	PAGE
30 AWG, 50 Ohm Coax	50CX-41	X2	1 of 1

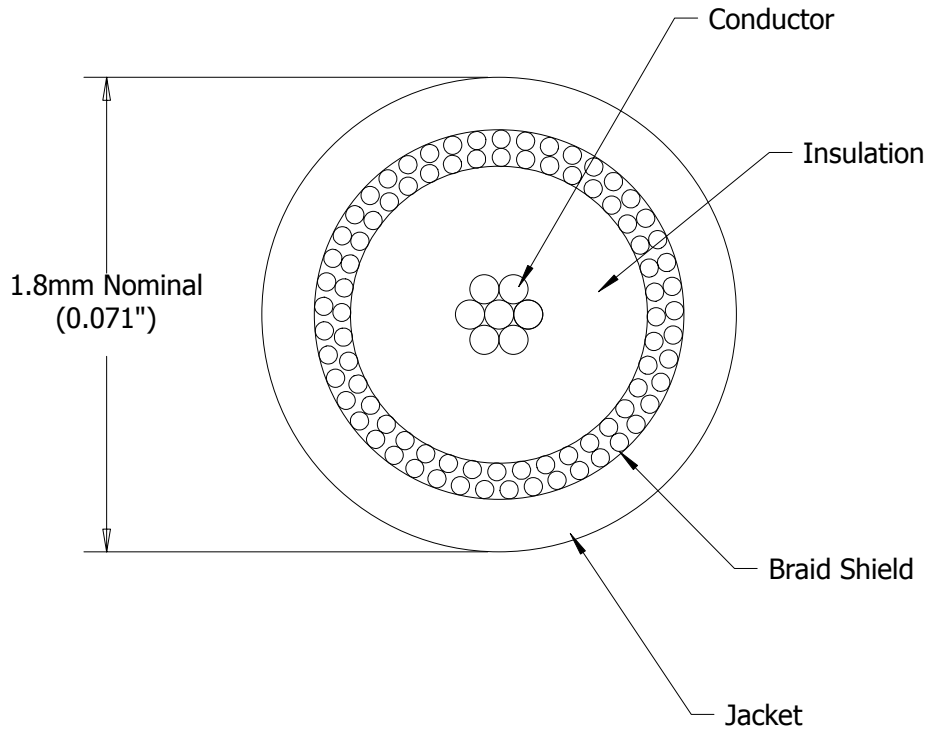

NOTES

Conductor: 30 AWG, 7/38, Silver Plated Copper

Insulation: FEP, 0.0345" (0.88mm) Diameter

Braid Shield: 42 AWG, Silver Plated Copper, >95% Coverage

Jacket: FEP

Color: Black

Impedance: 50 +/- 2 Ohms

Capacitance: 30 pF/ft Nominal

Velocity of Propagation: 70%

This document is the property of TEMP-FLEX. If may not be disclosed, reproduced, or otherwise used without permission.	Rev	DCR	Description	App'd	Date
	X1	3073	Preliminary Release.	KP	9/26/12
	X2	3135	Adjust Core OD.	KP	11/12/12