


**\* UNCONTROLLED DOCUMENT \* FOR REFERENCE ONLY**

**STEWARD**

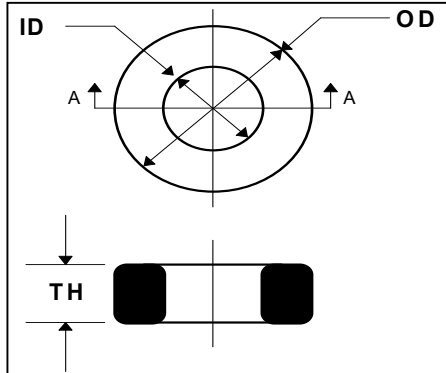

CORE DIMENSIONS					
UNCOATED CORE				<b>35T1417-000</b>	
	MM	INCHES	MM	INCHES	
OD	36.00	(1.417)	± .51	(.020)	
ID	23.00	(.906)	± .51	(.020)	
TH	10.00	(.394)	± .25	(.010)	
EPOXY COATING				<b>35T1417-00H</b>	
OD	37.27	(1.467)	±	max	
ID	21.73	(.856)	±	min	
TH	11.02	(.434)	±	max	

WEIGHT / K 29.4840 KGS 65.0000 LBS  
 INITIAL PERMEABILITY 5000

ELECTRICAL SPECIFICATIONS								
	MIN ( $\mu H$ )	MIN TOL.	NOM ( $\mu H$ )	MAX ( $\mu H$ )	MAX TOL.	FREQ. (kHz)	VOLT. (V)	TURNS
L1	3.634	(-20%)	4.453	5.452	+20%	100	≤.0284	1
L2	363.4	(-20%)	445.3	545.2	+20%	100	≤.2838	10
Q	10	-	-	-	-	100	≤.0284	1

COATING SPECIFICATIONS					
		Max. Coating Thickness (mm)	Min. DLB VAC	Min. DLB VDC	TEST FORCE (LB)
	TYPE				
35T1417-000	UNCOATED	-	-	-	-
35T1417-00H	EPOXY	0.76	1000	1333	9.34

NOTES

**Steward**

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.

Date:	01/05/2006	DWG #:	35T1417-00H-E	Title:	35T1417-00H	REV:	E
Drawn By:	JRK						

REV	Description	ECN #	Date	INT
E	Chg Coating description from Poly to Epoxy Add Kgs to Weight		01/05/06	JRK