

Powerex General Purpose Rectifier Diodes are designed with high blocking voltage capability and low forward voltage drop to minimize conduction losses. These are packaged in hermetic, ceramic Pow-R-Disc packages which can be mounted using commercially available clamps and heatsinks or fully assembled to a variety of air or water cooled heat exchangers.

FEATURES:

- Low On-State Voltage
- Hermetic Ceramic Package
- Excellent Surge and I^2t Ratings

APPLICATIONS:

- DC Power Supplies
- Input Rectifiers
- Plating Supplies

ORDERING INFORMATION

Select the complete 12 digit Part Number using the table below.
 EXAMPLE: RDK83085XXOO is a 3000V-8500A General Purpose Diode with a typical reverse recovery time of 35 μ s.

| PART | Voltage Rating $V_{DRM}-V_{RRM}$ | Voltage Code | Current Rating I_{TAVG} | Current Code | Reverse Recovery t_{RR} | Lead Code |
|-------------|-------------------------------------|--------------|------------------------------|--------------|------------------------------|-----------|
| RDK8 | 3000V | 30 | 8500A | 85 | XX | OO |
| | 2600V | 26 | | | | |
| | 2400V | 24 | | | 35 μ s typical | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Revised: 9/30/2005

Absolute Maximum Ratings

| Characteristic | Symbol | Rating | Units |
|---|---------------|-----------------|------------------|
| Repetitive Peak Reverse Voltage | V_{RRM} | 3000 | Volts |
| Average On-State Current, $T_C=90^\circ\text{C}$ | $I_{F(Avg.)}$ | 8500 | A |
| RMS On-State Current, $T_C=90^\circ\text{C}$ | $I_{F(RMS)}$ | 13352 | A |
| Average On-State Current, $T_C=55^\circ\text{C}$ | $I_{F(Avg.)}$ | 10000 | A |
| RMS On-State Current, $T_C=55^\circ\text{C}$ | $I_{F(RMS)}$ | 15708 | A |
| Peak One Cycle Surge Current, 60Hz, $V_R=V_{RRM}$ | I_{FSM} | 100,000 | A |
| Fuse Coordination I^2t , 60Hz | I^2t | 4.17E+07 | A ² s |
| Peak One Cycle Surge Current, 50Hz, $V_R=0V$ | I_{FSM} | 92,500 | A |
| Fuse Coordination I^2t , 50Hz | I^2t | 4.28E+07 | A ² s |
| Operating Temperature | T_j | -40 to+160 | °C |
| Storage Temperature | $T_{Stg.}$ | -50 to+190 | °C |
| Approximate Weight | | 6.5 | lb |
| | | 2.95 | Kg |
| Mounting Force | | 16,000 - 20,000 | lbs |
| | | 71.2 - 89.0 | Knewtons |

The information on this datasheet is based upon Powerex testing and projected ratings and is subject to change without notice. Powerex makes no implicit or explicit claim to reliability, capability, performance or suitability of this product for a users application. Powerex makes no guarantee of future availability of this product.




Electrical Characteristics, Tj=25°C unless otherwise specified

| Characteristic | Symbol | Test Conditions | Rating | | | Units |
|---|-----------|---|--------|-----|----------|-------|
| | | | min | typ | max | |
| Repetitive Peak Reverse Leakage Current | I_{RRM} | Tj=160°C, V_{RRM} =Rated | | 150 | 300 | ma |
| Peak On-State Voltage | V_{FM} | Tj=160°C, I_{FM} =4000A | | | 0.82 | V |
| V_{FM} Model, Low Level | V_0 | Tj=160°C | | | 0.762 | V |
| $V_{FM} = V_0 + r \cdot I_{FM}$ | r | 15% $I_{FM} - \pi \cdot I_{FM}$ | | | 5.28E-02 | mΩ |
| V_{FM} Model, High Level | V_0 | Tj=160°C | | | 0.937 | V |
| $V_{FM} = V_0 + r \cdot I_{FM}$ | r | $\pi \cdot I_{FM} - I_{FSM}$ | | | 4.58E-02 | mΩ |
| V_{FM} Model, 4-Term | A | Tj=160°C | | | 0.462 | |
| $V_{FM} = A + B \cdot \ln(I_{FM}) +$ | B | 15% $I_{FM} - I_{FSM}$ | | | 3.10E-02 | |
| $C \cdot (I_{FM}) + D \cdot (I_{FM})^{1/2}$ | C | | | | 4.24E-05 | |
| | D | | | | 1.43E-03 | |
| Reverse Recovery Time | t_{RR} | Tj=25°C, I_{FM} =400A $di_R/dt = 25 A/\mu s$ | | 35 | | μs |


Thermal Characteristics

| Characteristic | Symbol | Test Conditions | Rating | | | Units |
|---|----------------|--------------------|----------|----------|----------|----------|
| | | | min | typ | max | |
| Thermal Resistance | | | | | | |
| Junction to Case | $R\theta_{jc}$ | Double side cooled | | 0.006 | 0.0063 | °C/Watt |
| Case to Sink | $R\theta_{cs}$ | Double side cooled | | 0.0008 | 0.001 | °C/Watt |
| Thermal Impedance Model | $Z\theta_{jc}$ | Double side cooled | | | | |
| $Z\theta_{jc}(t) = \sum(A(N) \cdot (1 - \exp(-t/\text{Tau}(N))))$ | | | | | | |
| | where: | N = | 1 | 2 | 3 | 4 |
| | | A(N) = | 1.43E-04 | 9.08E-04 | 2.07E-03 | 3.20E-03 |
| | | Tau(N) = | 2.62E-03 | 4.31E-02 | 6.05E-01 | 6.00E+00 |


Maximum On-State Voltage Drop

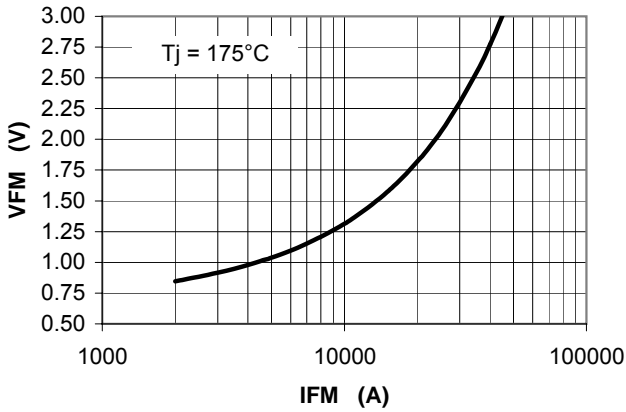

MAXIMUM TRANSIENT THERMAL IMPEDANCE

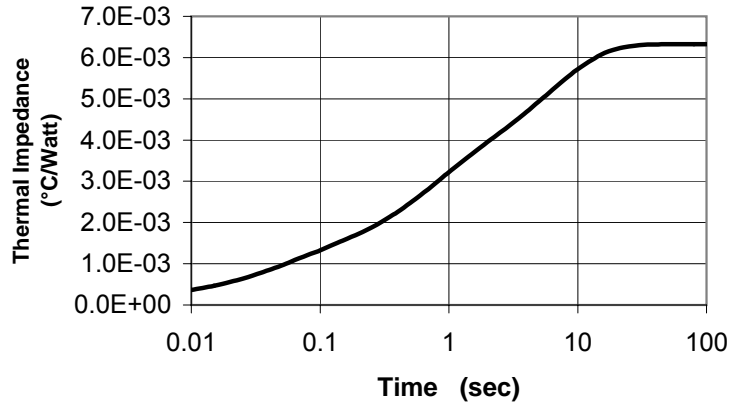

POWER DISSIPATION

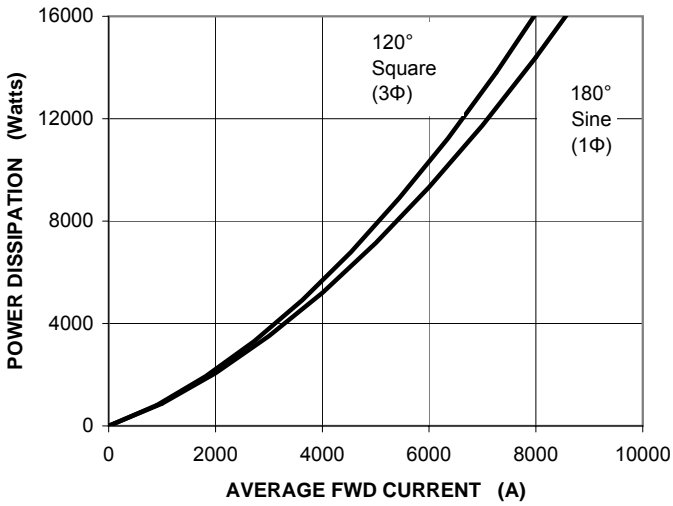

ALLOWABLE CASE TEMPERATURE

