
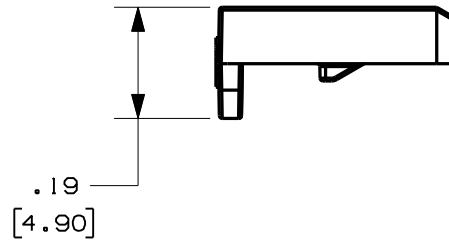

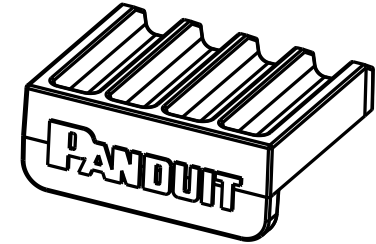


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

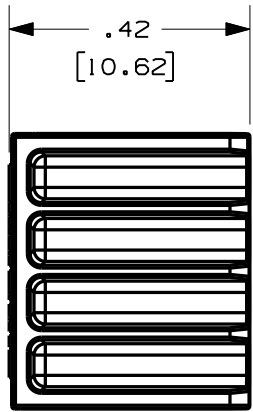

NOTES:

1. [] DENOTE MILLIMETERS
2. TEMPERATURE RANGE:
-40°F (-40°C) TO 120°F (60°C)
3. RoHS COMPLIANT

CAD FILENAME/LAYERS 100162B0_DC_C10948/05A

PANDUIT CORP. TINLEY PARK, ILLINOIS

PSL - PERM - USBA
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± .1 (.XXX) ± .01
(.XX) ± .03 ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
JHAC

MAT'L:

SCALE

2:1

0

10/6/11

JHAC

DRAWING RELEASE

6533

DATE
10/06/11

RED
33% GLASS FILLED
NYLON

DRAWING NO.

C10948

DWG
A
SIZE

REV

DATE

BY

CHK

DESCRIPTION

ECN - R

CUST

SUP

CHK'D