

5

4

3



2

1



SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	470pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

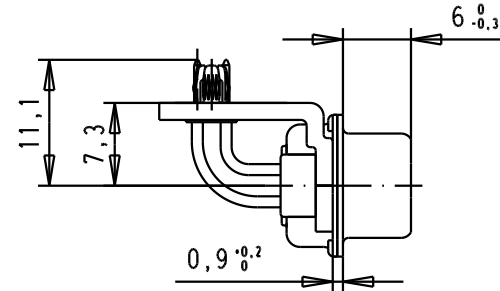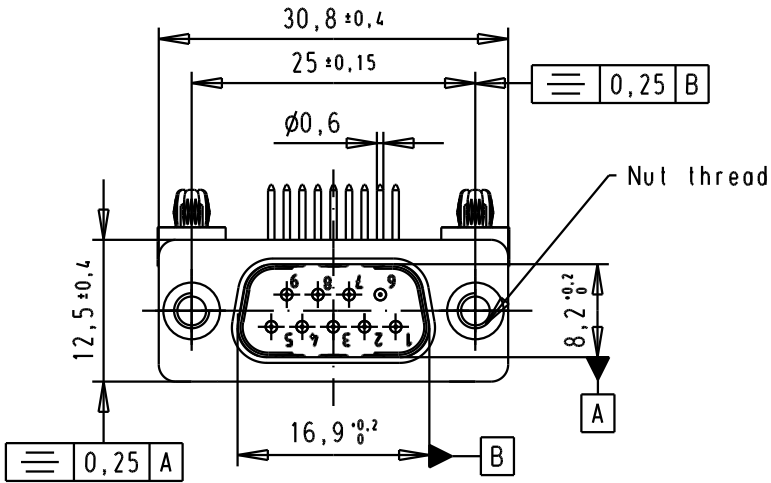

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	1dB
50	10dB
100	15dB
500	35dB
1000	32dB

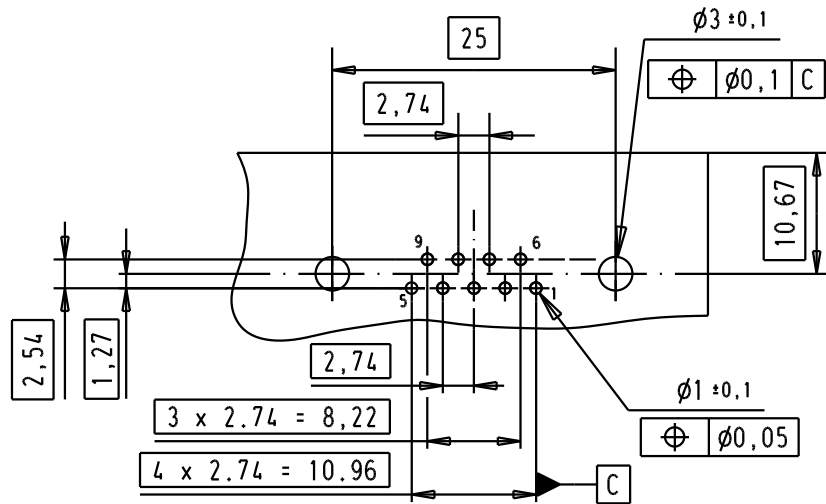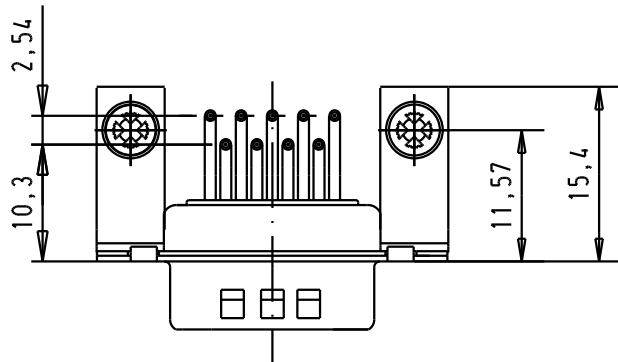

PCB Layout, Component side, thickness 1.6 mm



D
C
B
A

					Det.	13/10/05	JMDR	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, angled, 9 Poles, solder pins, tin plated shell with dimples, brackets, clinch nuts and board-locks	Ma?Ms tab/ Scale 1.5:1
					Insp.					
					Stand.					
09641247223	M3	33240	13/10/05	JMDR	HARTING EURL F-95972 Paris				TB 0964124722x	Blatt/ Page 1 / 4
09641247222	UNC 4-40	31058	8-JUL-02	CV						
Part number	Nut thread	Mod.	Dat.	Name				Sub.		