


NOTE 1. THE QUANTITY OF H.F.L/S-R-SMT(10) IS 2500 CONNECTORS PER REEL.

- 2 THIS DIMENSION SHOWS THE ALLOWABLE RANGE THAT THE RESIN IS PUT OVER THE CENTER CONTACT.
3. FOR THE POSSIBILITY OF BREAKAGE OR DEFORMATION, DO NOT MATE THIS CONNECTOR WITH PARTNER, H.F.L/S-LP-*** BEFORE MOUNTING ON PC BOARD.
4. USE ALL PRODUCTS WITHIN 6 MONTHS AFTER THE DELIVERY. STORE THEM IN MANUFACTURER'S PACKAGE OR TIGHTLY RE-CLOSED BOX WITH THE FOLLOWING CONDITIONS. CHECK THE TERMINAL SOLDERABILITY BEFORE USE IF THE PRODUCT HAS BEEN STORED FOR MORE THAN 6 MONTHS.
TEMPERATURE: -10°C TO +40°C
HUMIDITY : 15 TO 85% RH.
5. ENVIRONMENTAL CONDITIONS
DO NOT USE THE PRODUCTS UNDER THE ENVIRONMENTAL CONDITIONS AS SHOWN BELOW DUE TO POSSIBLE PRODUCT DETERIORATION.
SPECIAL GAS ATMOSPHERE (HYDROGEN SULFIDE GAS, SULFUR SULFIDE GAS AND HYDROGEN CHLORIDE GAS)
PLACE ATTENTION REQUIRED: HEATING SYSTEM, AREA NEAR HOT SPRING, VOLCANIC MOUNTAIN AND ALIKE.
WATER SPLASHED AND CONDENSATION PLACES.
PLACE ATTENTION REQUIRED: HARSH TEMPERATURE CHANGE.
6. THIS IS A NON-MAGNETIC CONNECTOR.

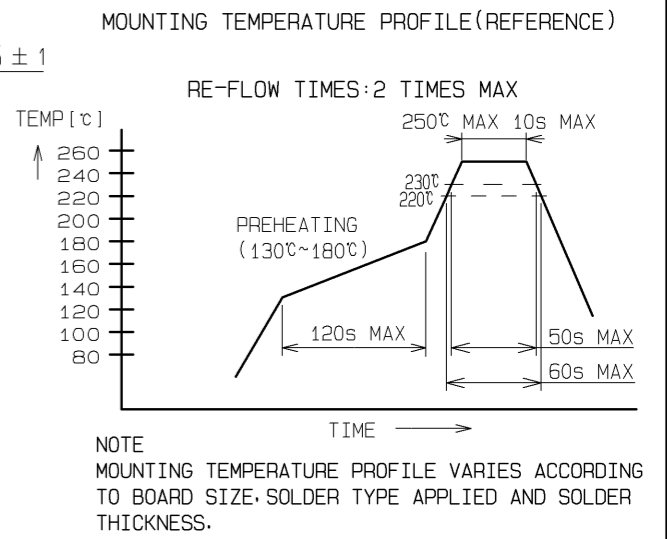

2	LCP	(BLACK), UL94V-0						
1	PHOSPHOR BRONZE	SILVER PLATING	3	BRASS				
				SILVER PLATING				
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS			
UNITS	mm	SCALE	10:1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
APPROVED: MH. YAMANE		11.10.04		DRAWING NO.		EDC3-325188-10		
CHECKED: NK. NINOMIYA		11.10.04		PART NO.		H.F.L/S-R-SMT(10)		
DESIGNED: YI. FUNADA		11.10.03		CODE NO.		CL331-0805-3-10		
DRAWN: YJ. ASAO		09.12.09						