

PCB terminal block - ZFKDSA 4-7,5- 6 - 1934625


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB terminal block, nominal current: 32 A, nom. voltage: 630 V, pitch: 7.5 mm, number of positions: 6, connection method: Spring-cage connection, mounting: Wave soldering, conductor/PCB connection direction: 45°, color: green

Why buy this product

- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Clamping space opened by means of fixed screwdriver enables convenient conductor connection
- ✓ Separate bridge shaft for easily connecting multiple positions to jumpers
- ✓ Quick and convenient testing using integrated test option

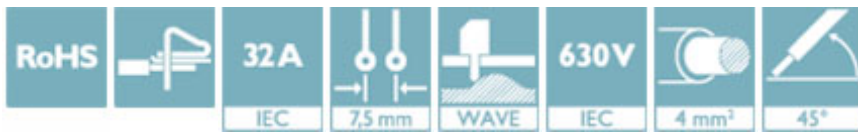

Key Commercial Data

Packing unit	50 STK
GTIN	 4 017918 900779
GTIN	4017918900779

Technical data

Dimensions

Length [l]	29 mm
Pitch	7.5 mm
Dimension a	37.5 mm
Width [w]	46.5 mm
Constructional height	23 mm
Height [h]	27.6 mm
Solder pin [P]	4.6 mm
Pin dimensions	1,0 x 1,4 mm
Hole diameter	1.8 mm

General

Range of articles	ZFKDS(A) 4
Rated surge voltage (III/3)	6 kV

PCB terminal block - ZFKDSA 4-7,5- 6 - 1934625

Technical data

General

Rated surge voltage (III/2)	6 kV
Rated surge voltage (II/2)	6 kV
Rated voltage (III/3)	500 V
Rated voltage (III/2)	630 V
Rated voltage (II/2)	1000 V
Connection in acc. with standard	EN-VDE
Nominal current I _N	32 A
Nominal cross section	4 mm ²
Internal cylindrical gage	A4
Stripping length	10 mm
Number of positions	6

Connection data

Conductor cross section AWG min.	24
Conductor cross section AWG max.	10

Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals


Approvals

Approvals

EAC / cULus Recognized


Ex Approvals

Approval details

EAC		B.01742
-----	---	---------

PCB terminal block - ZFKDSA 4-7,5- 6 - 1934625

Approvals

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E60425-19941110	
	D	B	C
Nominal voltage UN	300 V	300 V	150 V
Nominal current IN	10 A	30 A	30 A
mm ² /AWG/kcmil	24-10	24-10	24-10

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>