

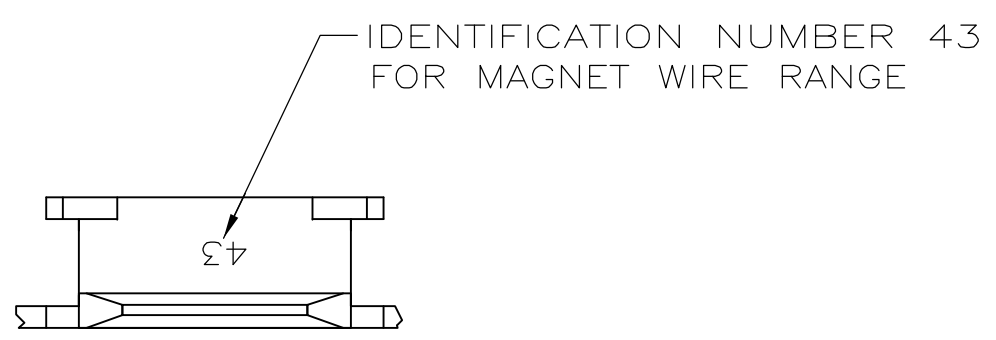
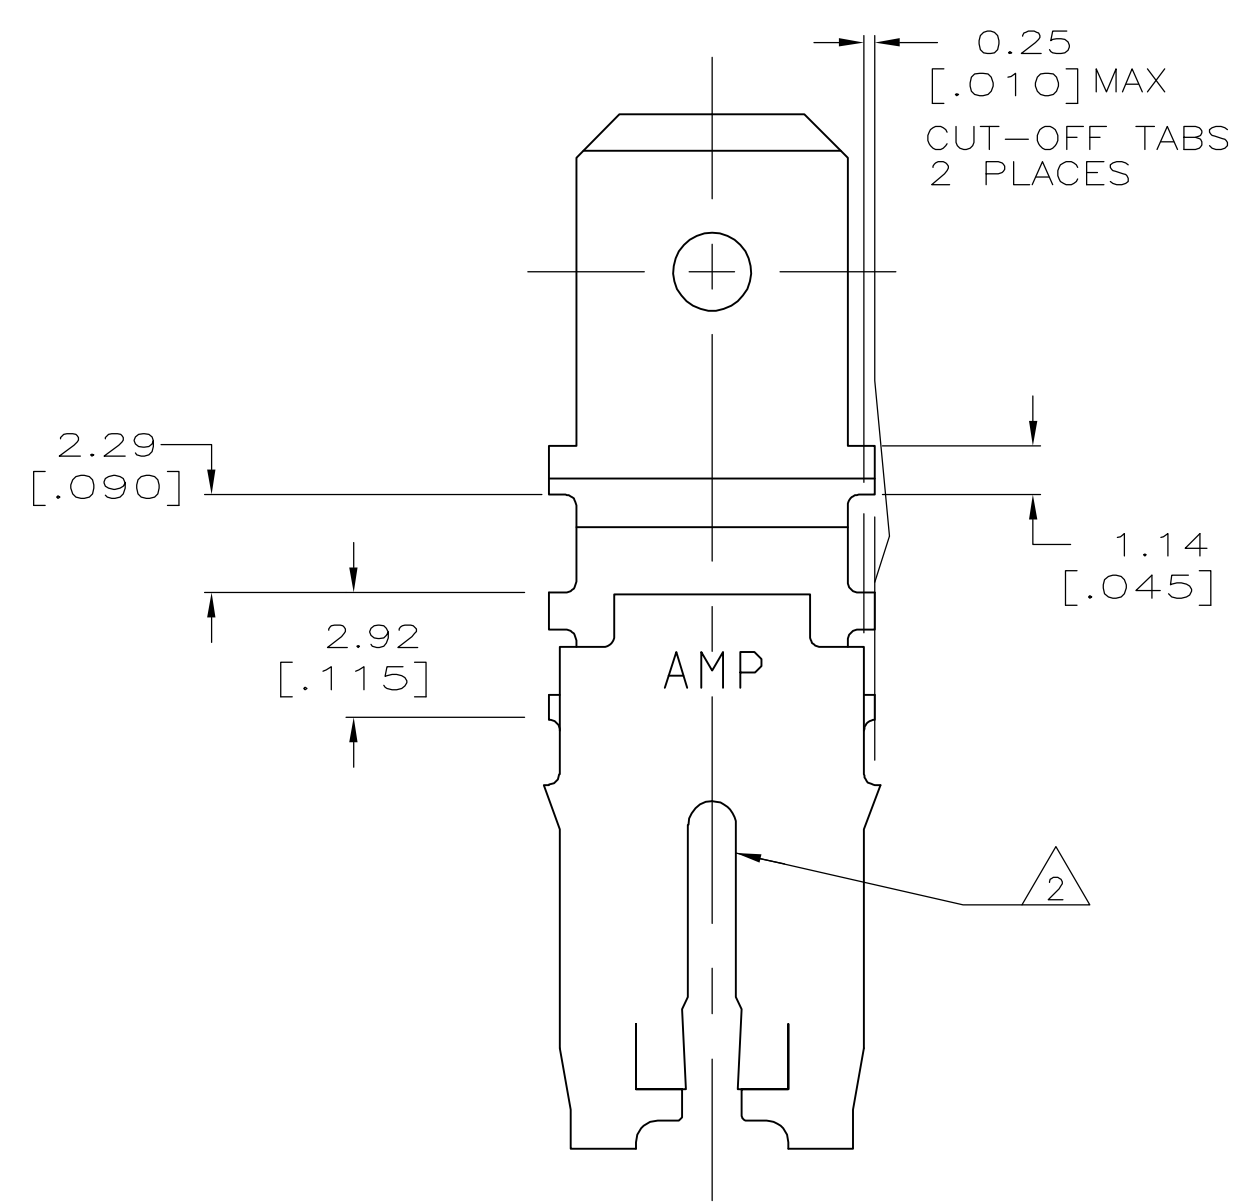


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | | DIST | | REVISIONS | | | |
|-----|-----|-------------|--|---------------------------|---------|--------|--|
| P | LTR | DESCRIPTION | | DATE | DWN | APVD | |
| AF | 50 | C | | REVISED PER ECR-06-010515 | 29AUG06 | HMR KR | |

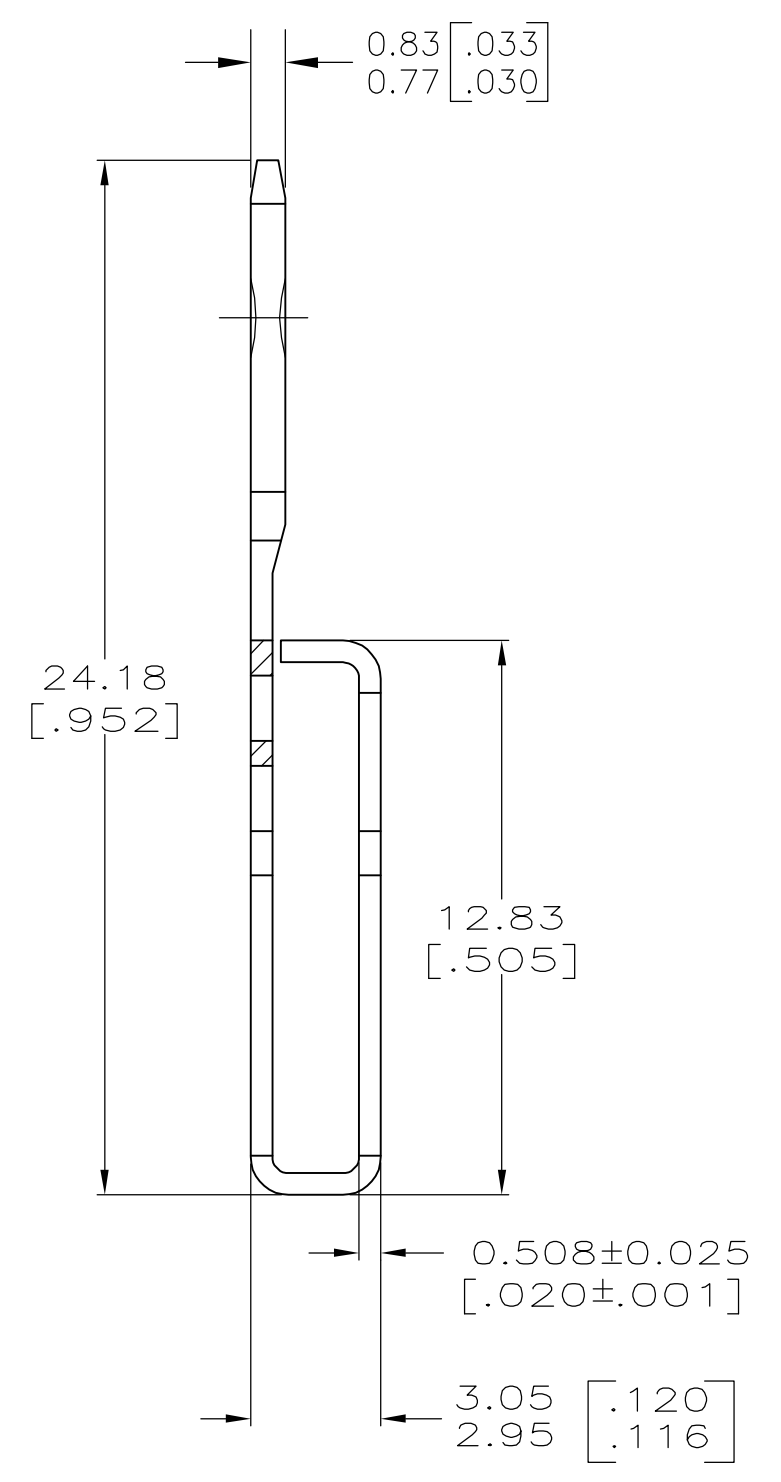

- 1 VARNISH RESIST OVER 0.002032[.000080] MIN TIN PER MIL-T-10727
- 2 SLOT ACCEPTS 1.61-1.83mm [#14-#13] AWG COPPER MAGNET WIRE. TWO 1.61mm [#14] AWG COPPER MAGNET WIRES ACCEPTABLE AT CAVITY ANVIL HEIGHT OF 3.94-4.19 [.155-.165].
- 3 AFTER INSERTION INTO PLASTIC HOLDER MAG-MATE MUST BE POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

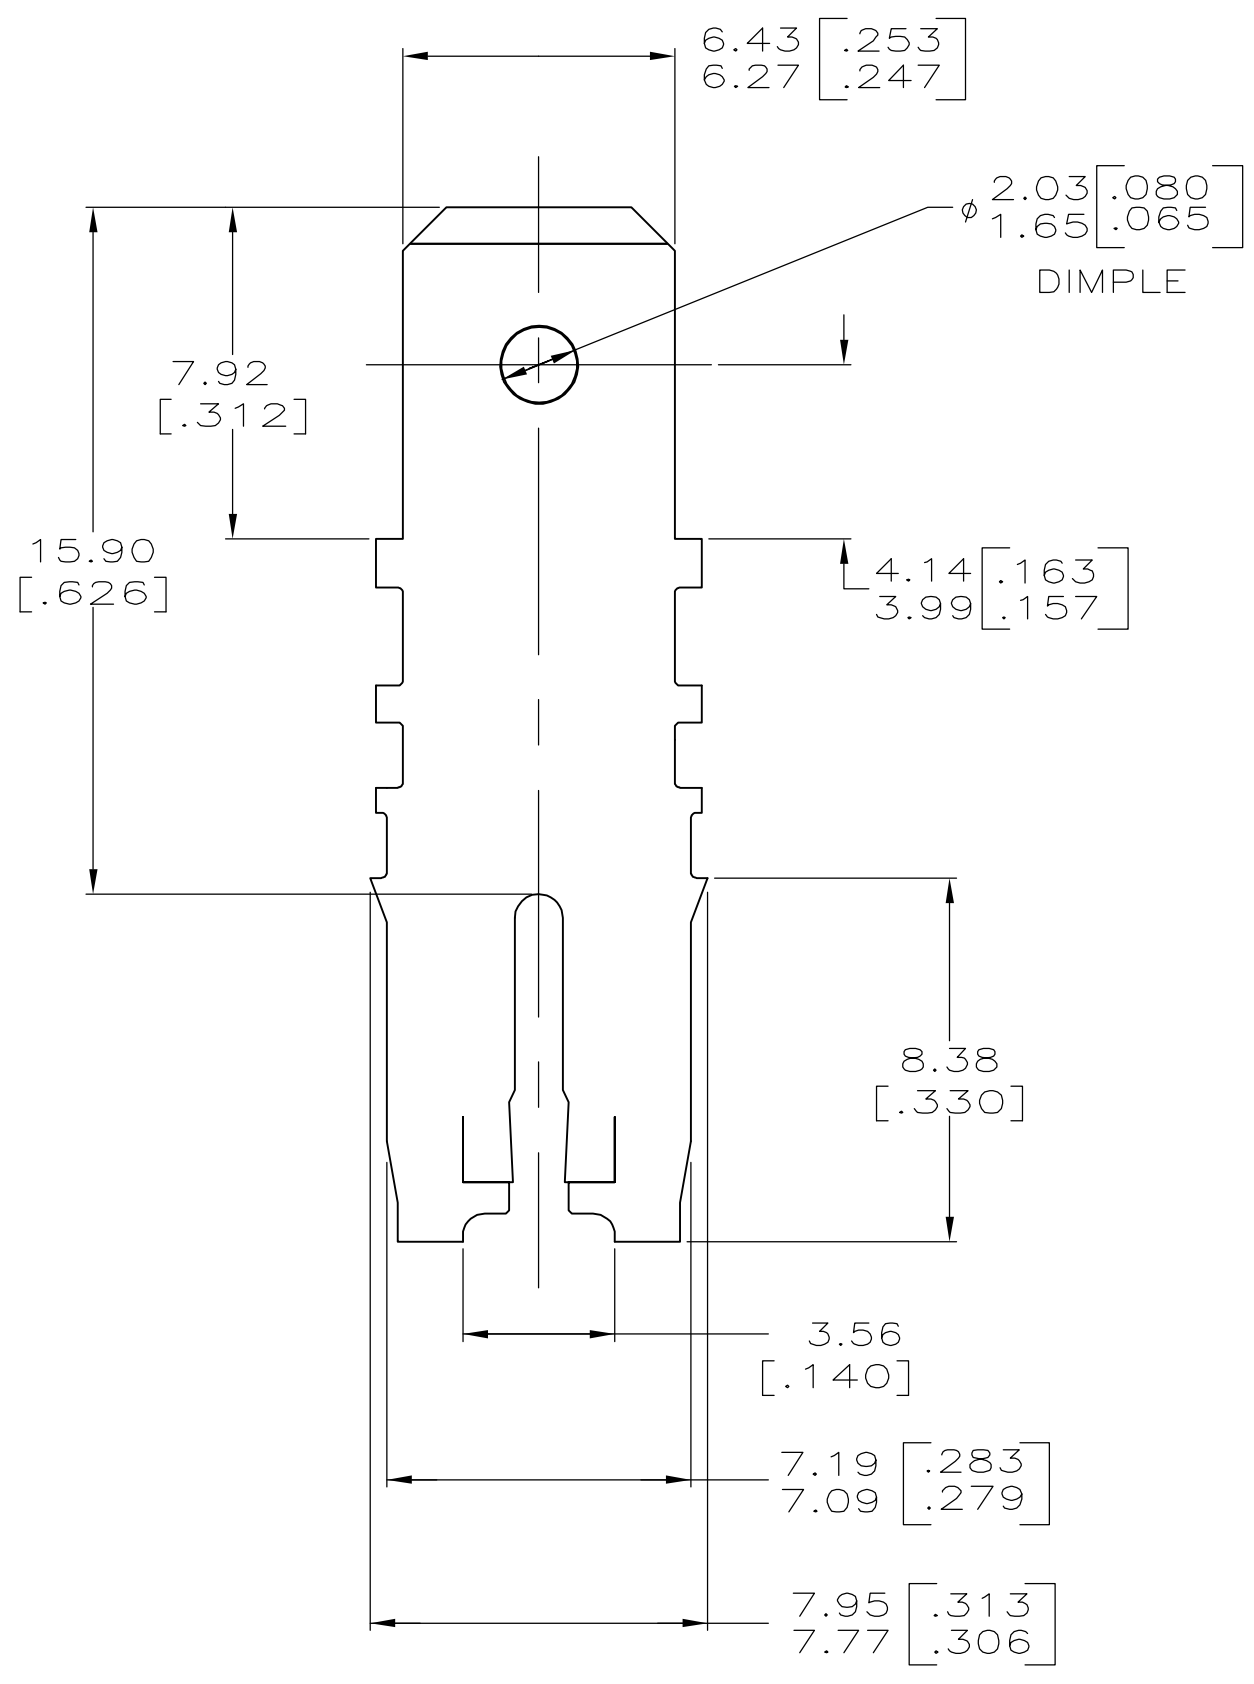

63883-1
PART NO

| | | | | |
|--|------------|-------------------------------|---|-----------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN R.GRZYBOWSKI 24/OCT/95 | tyco Tyco Electronics Corporation Harrisburg, PA 17105-3608 | |
| DIMENSIONS: mm [INCHES] | | CHK M.S. FEHER 24/OCT/95 | NAME | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD NELSON F. NEFF 24/OCT/95 | TAB, LOOSE PIECE, 6.35 [.250] FASTON™, MAG-MATE™ | |
| 0 PLC ± - | 1 PLC ± - | PRODUCT SPEC 108-2053 | SIZE A2 | CAGE CODE 00779 |
| 2 PLC ± 0.25 [.010] | 3 PLC ± - | APPLICATION SPEC 114-2066 | DRAWING NO G-63883 | RESTRICTED TO - |
| 4 PLC ± - | ANGLES ± - | WEIGHT - | SCALE 6:1 | SHEET 1 of 1 |
| MATERIAL 4M PRE-MILLED BRASS | FINISH 1 | CUSTOMER DRAWING | REV C | |