


寸法公差は±0.20
(TOLERANCE: ±0.2)
パネル取付穴
(DIMENSION OF PANEL)

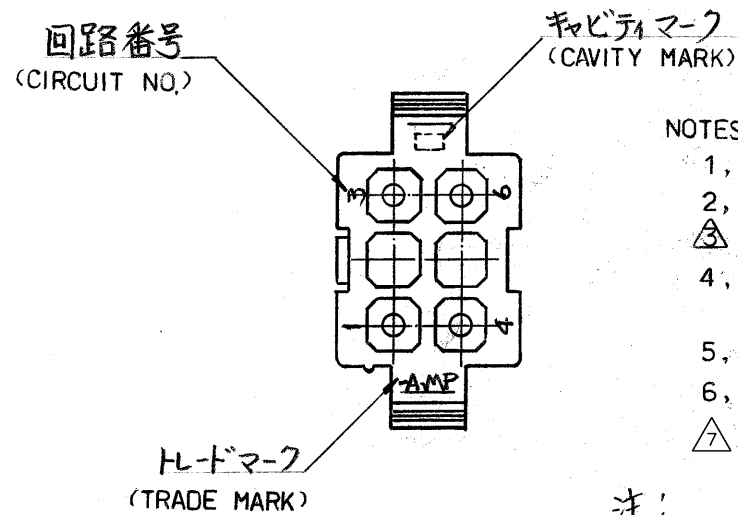

NOTES:

- 1, APPLIED CONTACT P/N: 170359, 170360, 170361, 170362
 - 2, MATING CONN: PLUG HOUSING P/N 172339
 - △ PANEL THICKNESS: 0.8 ~ 2.0 mm
 - 4, PRESS DIRECTION OF PANEL MUST BE SAME AS HOUSING INSERTED DIRECTION.
 - 5, INSTRUCTION SHEET: IS-105J
 - 6, PRODUCT SPEC: 108-5151
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

注:

1. 使用端子型番は 170359, 170360, 170361, 170362
2. 嵌合相手ハウジング型番は 172339
- △ 適用パネル厚 0.8 ~ 20 mm
4. 取付穴打抜方向とハウジングの挿入方向は同じとする。
5. 取扱説明書: IS-105J
6. 適用製品仕様書: 108-5151

OBSOLETE	黄 (YELLOW)	1 - 172331 - 4
	黒 (BLACK)	1 - 172331 - 9
	青 (BLUE)	1 - 172331 - 6
	緑 (GREEN)	1 - 172331 - 5
	赤 (RED)	1 - 172331 - 2
	自然色 (NATURAL)	172331 - 1
色 (COLOR)		型番 (P/N)

単位: 概 寸法 IN MM. DO NOT SCALE PRINT

A3	REVISED PER ECO-11-005030	RK	HMR	01APR11
LTR.	変更 (REVISION RECORD)	DR.	CHK.	DATE

材料 (MATERIAL) 6/6 ナイロン (UL94V-2) (NYLON 6/6 UL94V-2)		一般公差 TOLERANCE ± 0.3 EXCEPT ± 1° AS NOTED		TE Connectivity	
仕上 (FINISH) 色: 表参照 HOUSING COLOR: SEE TABLE		DR. <i>R. Yuzasa 4/20/11</i> CHK. <i>J. Taniguchi</i> DE. <i>4/21/11</i> APP.		名称 (NAME): MINI-UNIVERSAL MATE-N-LOK CONN. CAP HOUSING 6Pos. (UL94V-2) 6極 ミニユニバーサル マイテック コネクターハウジング (UL94V-2)	
		SIZE: B LOC: J	番号 (NO.): C-172331		
		尺度 (SCALE): 2:1	REV. A3	SHEET: #	