


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00	A	ECO-06-004262	25JUL06	BSV MK

NOTES:

- 1 INSULATOR MATERIAL: THRMOPLASTIC POLYESTER, BLACK UL 94V-0
- 2 STAMPED CONTACT: BECU, PLATED WITH GOLD FLASH OVER 50-100μ THK NICKEL
- 3 SLEEVE: COPPER, PLATED WITH 180-340μ THK TIN (LEAD FREE) OVER 75-125μ THK NICKEL
- 4. PARTS ARE END-TO-END STACKABLE AND BREAKABLE TO CREATE VARIOUS POSITION SIZES

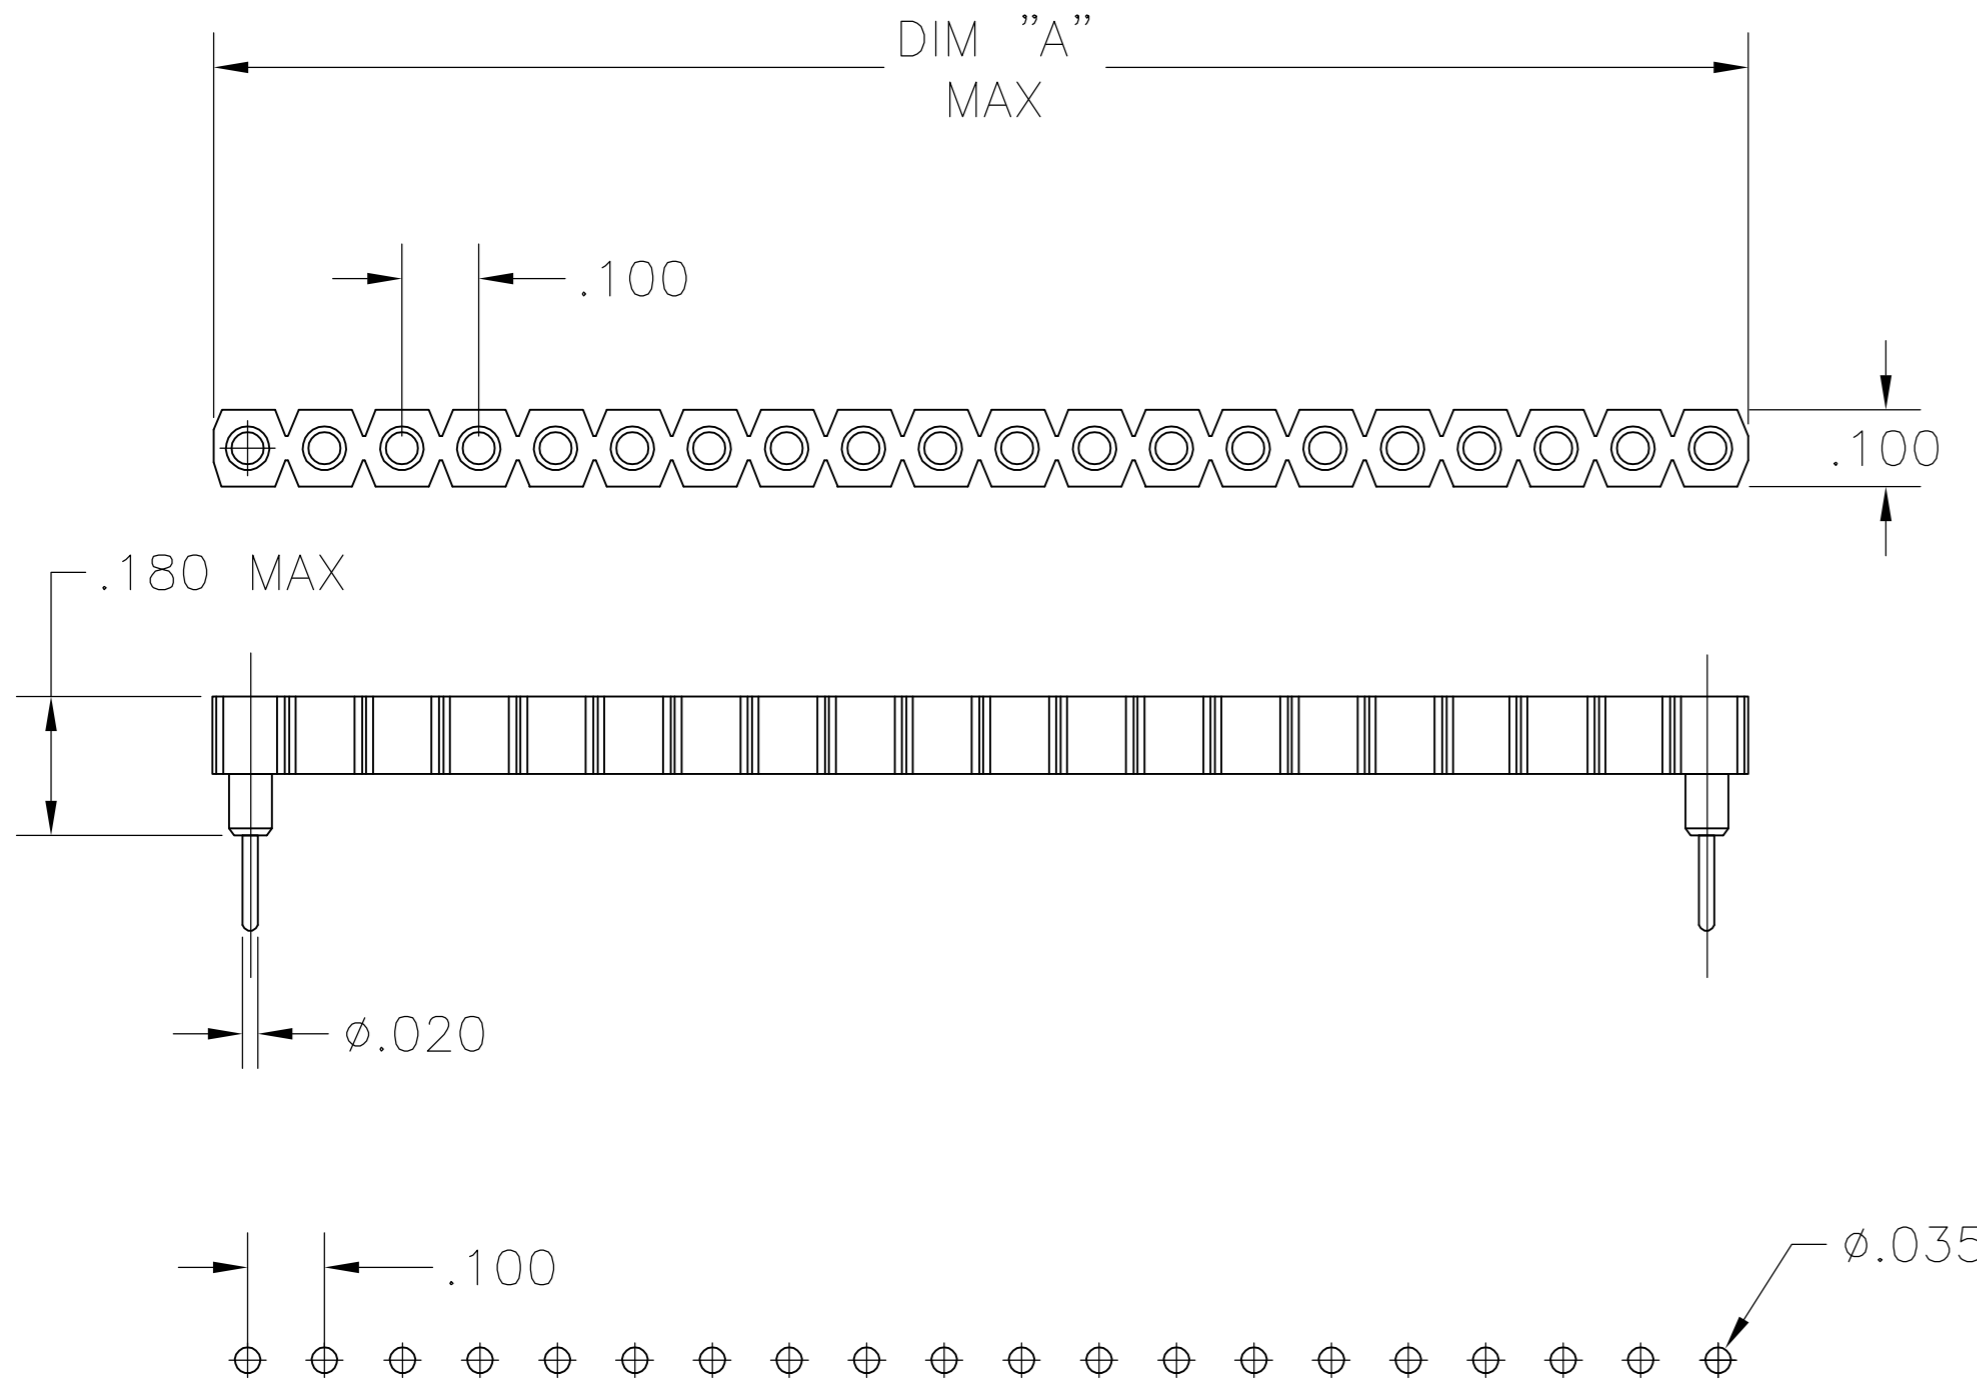

RECOMMENDED HOLE LAYOUT
 TOLERANCE ±.002 UNLESS
 OTHERWISE NOTED

1.000	10	1825532-4
0.800	8	1825532-3
0.700	7	1825532-2
1.600	16	1825532-1
DIM "A"	POSITION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.S VISWESWARA	25JUL06	tyco Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK -	APVD MILLER KENNETH	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC -		APPLICATION SPEC -	
0 PLC ± -		WEIGHT -		SIZE A2	CAGE CODE 00779
1 PLC ± -		MATERIAL 1		DRAWING NO C=1825532	
2 PLC ± -		FINISH 2 3		RESTRICTED TO -	
3 PLC ± -		CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1
4 PLC ± -				REV A	
ANGLES ± -					

1825532