




TOP VIEW




FRONT VIEW

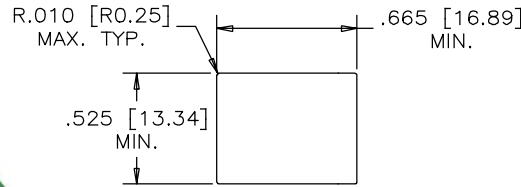


RECOMMENDED PANEL CUTOUT

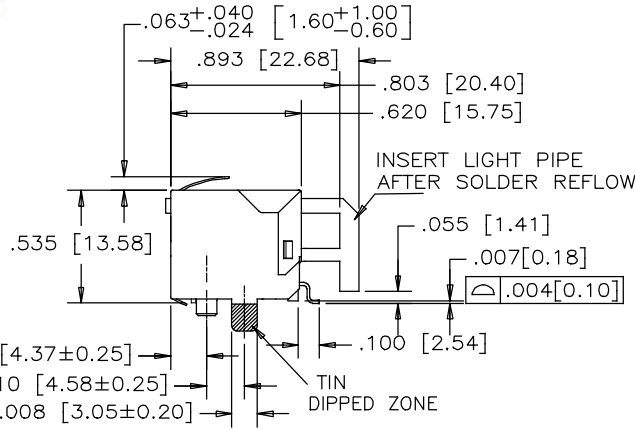



SIDE VIEW



LIGHT PIPE




FINISH CONNECTOR

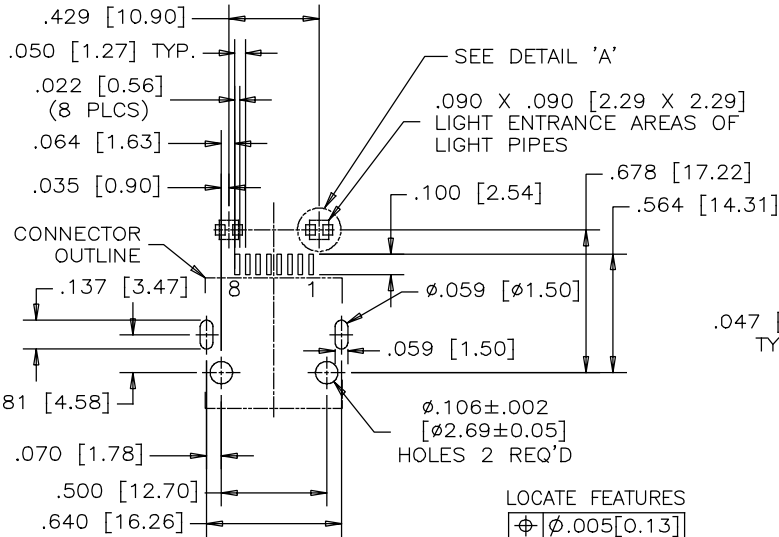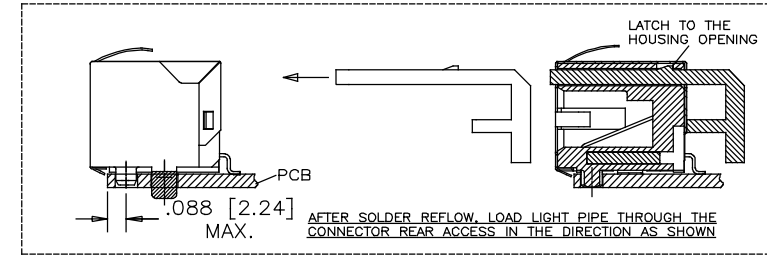

RECOMMENDED P.C.B. LAYOUT (COMPONENT SIDE OF BOARD)

LOCATE FEATURES
 $\phi \pm .005 [0.13]$
 POSITION DIMENSIONS ARE BASIC

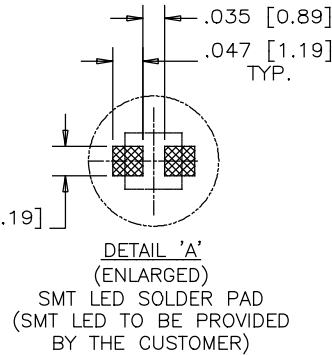

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	Oct 29.09	L.CHAN
B		PROPOSAL	NOV 9.09	L.CHAN
C		UPDATE DRAWING	JAN 23.14	L.CHAN
D		CORRECT DIMENSION	JAN 18.16	L.CHAN

MATERIALS:

PLASTIC HOUSING: HIGH TEMPERATURE ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0

CONTACTS:

PHOSPHOR BRONZE
 PLATING: 20 μ" [0.51 MICRONS] MIN. GOLD ON MATING SURFACES.
 50 μ" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.
 100 μ" [2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS.

SHIELD:

COPPER ALLOY
 PLATING: NICKEL

LIGHT PIPE:

CLEAR POLYCARBONATE
 FLAMMABILITY RATING UL 94V-0

PART NUMBER: RJSS-5S81

SHELL OPTION _____
 S - SPECIAL SOLDER
 TAIL OF SHEEL

MATERIAL	DESIGNED	DATE	Amphenol Canada Corp.		
	CHECKED	Oct 29.09			
FINISH	I. E. APPRD.		TITLE		
	Q. A. APPRD.	Oct 29.09			SURFACE MOUNT, RJ45, 8 POSITION, 8 CONTACTS, SHIELD WITH TOP TAB, WITH LIGHT PIPES - RoHS COMPLIANT
	ENG. REL. NO.		DWG	DRAWING NO.	REV.
	REF. EAR 13608		C	P-RJSSE-5S81	D
	DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. 03554	SCALE	2:1	WT. _____
			SURF.	_____	SHEET 1 OF 1