


NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
 - 1.1 FREQUENCY RANGE: DC to 4.0 GHz
 - 1.2 VSWR: 1.25:1 MAX.
 - 1.3 IMPEDANCE: 50 OHMS
 - 1.4 POWER: 2 WATTS AVG. AT +25°C
DERATED LINEARLY TO 0.5 WATTS AT +125°C
 - 1.5 PEAK POWER: 0.25 KILOWATTS (5 MICROSECOND PULSE WIDTH).
 - 1.6 OPERATING TEMP. RANGE: -54°C to +125°C

2.0 MARKING

2.1 MARK UNIT AS SHOWN:

3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

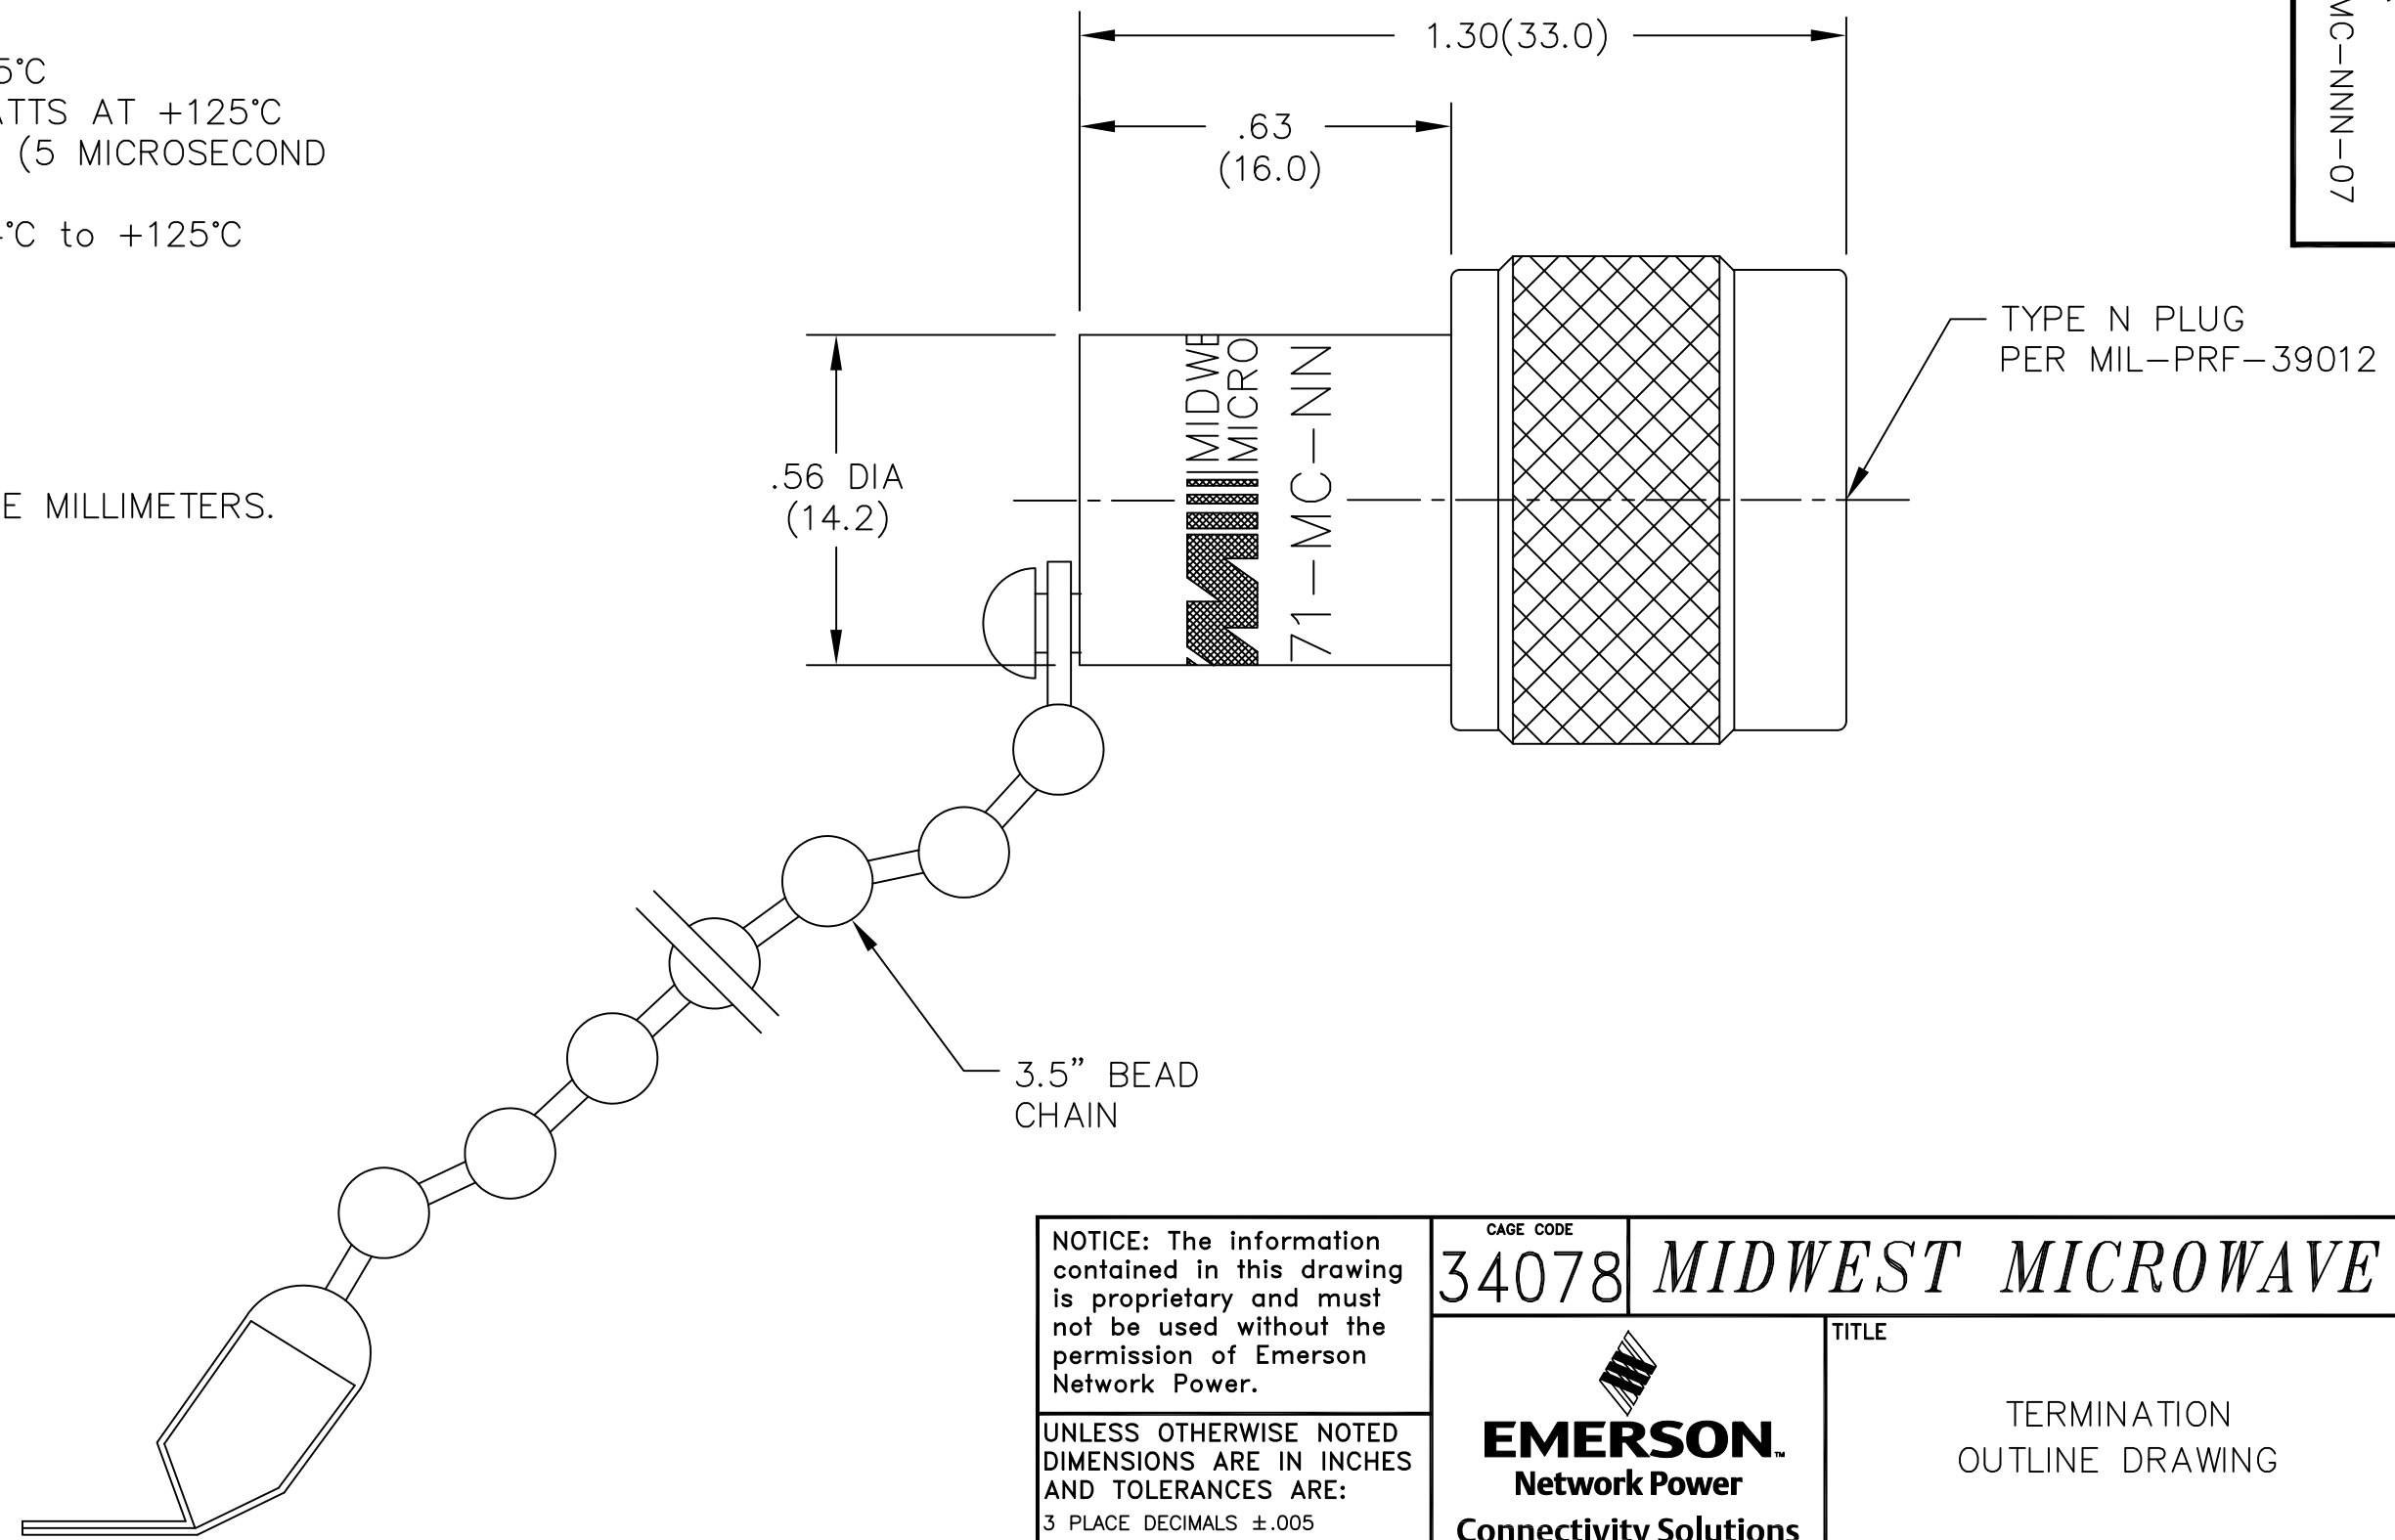

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
 3 PLACE DECIMALS ±.005
 2 PLACE DECIMALS ±.02
 FRACTIONS ±1/64
 PARALLELITY: T.I.R. _____
 FLATNESS: T.I.R. _____
 CONCENTRICITY: T.I.R. _____
 ANGLES AND PERPENDICULARITY: ±1'

CAGE CODE 34078		MIDWEST MICROWAVE	
 EMERSON Network Power Connectivity Solutions		TITLE TERMINATION OUTLINE DRAWING	
		DRAWING NUMBER TRM-2071-MC-NNN-07-01	REV. C
DRAWN/DATE A.BEATTY 8/5/93	ENG./DATE G.KOZAK 8/10/93	SCALE: 3=1	SHEET 1 of 1
CHECKED/DATE M.HOLLMAN 8/6/93	APPROVED/DATE		

REV.	DESCRIPTION	DATE
-	RELEASED	8/12/93
-1	ADDED TITLEBLOCK	10/28/05
C	ECO 23409	3/24/11