

## Feed-through header - EMC 1,5/ 2-G-3,5 - 1897092

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB headers, nominal current: 8 A, rated voltage (III/2): 160 V, number of positions: 2, pitch: 3.5 mm, color: green, contact surface: Tin, mounting: Press-in technology




The figure shows a 10-position version of the product

### Why buy this product

- Long-term stable press-in connection ensures high holding force without thermal load
- Maximum flexibility when it comes to device design – one header for connectors with different connection technologies

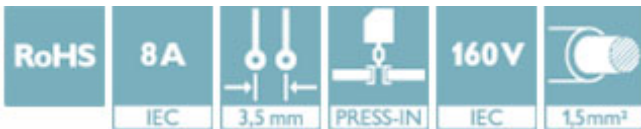

### Key Commercial Data

Packing unit	50 STK
GTIN	 4 017918 166236
GTIN	4017918166236

### Technical data

#### Dimensions

Length [ l ]	10.7 mm
Width	8.4 mm
Pitch	3.5 mm
Dimension a	3.5 mm
Width [ w ]	8.4 mm
Height [ h ]	10.5 mm
Constructional height	7 mm
Length of the solder pin	3.5 mm
Length	10.7 mm

#### General

Range of articles	EMC 1,5/...-G
Insulating material group	IIIa

## Feed-through header - EMC 1,5/ 2-G-3,5 - 1897092

### Technical data

#### General

Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	160 V
Rated voltage (III/2)	160 V
Rated voltage (II/2)	250 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	8 A
Maximum load current	8 A
Insulating material	PBT
Flammability rating according to UL 94	V0
Color	green
Number of positions	2

#### Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL
Flammability rating according to UL 94	V0




#### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


### Drawings

# Feed-through header - EMC 1,5/ 2-G-3,5 - 1897092

Drilling diagram

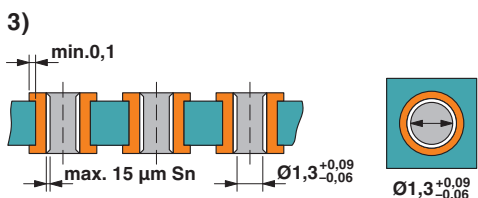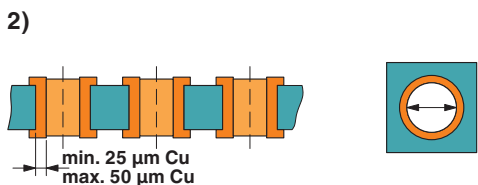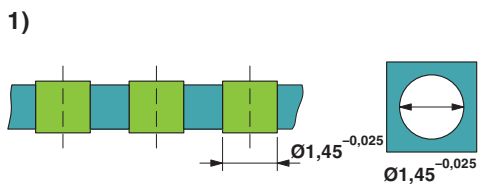


Drilling diagram



Minimum printed circuit board thickness 1.5 mm

Drill hole layout in FR4 or EP-GC basic material

Dimensional drawing

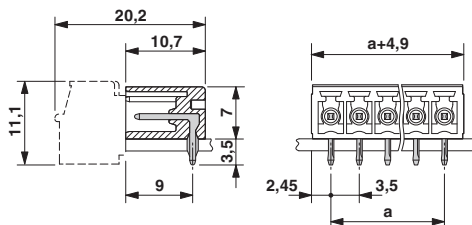

## Approvals

Approvals

---

Approvals

cULus Recognized / EAC

---


Ex Approvals

---

Approval details

## Feed-through header - EMC 1,5/ 2-G-3,5 - 1897092

### Approvals

cULus Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E60425-20110128
	D	B	
Nominal voltage UN	300 V	300 V	
Nominal current IN	8 A	8 A	

EAC		B.01742
-----	---	---------

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>