


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0402 NPO 3.9pF 50V(0402N3R9C500CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05


2. Cap, DF, IR @25°C

(Cap, DF @ 1MHz, 1Vrms ; IR @ 100V, 120sec)

Item	Spec
Cap [pF]	3.9 (±0.25pF)
DF	≤ 0.21%
IR [G-ohm]	>10

3. Impedance/ESR-Frequency

(Equipment: 4287A+ENA5071C)

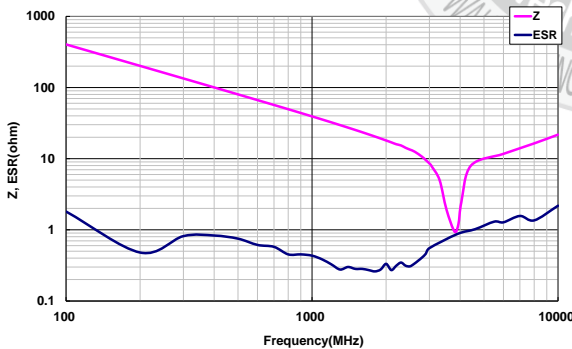

4. Capacitance – Temperature Characteristics


(Equipment: 4284A)

≤ 10 pF , The TCC measurement is unstable and high deviation

5. Capacitance – DC Voltage Characteristics

(Equipment: 4284A; DC charge 60±5sec)

25V : 0.00% ; 50V : 0.00%

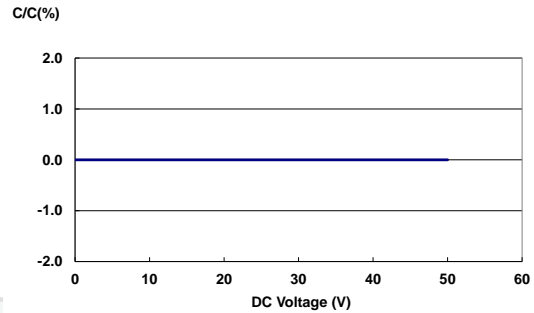

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

