


NOTES:

- ① MAT'L: COPPER (STOCK TKN. $\frac{.040}{1.02}$)
 - ② PLATING: ELECTRO TIN (.0003 MIN)
 - ③ TIN-PLATED BRASS FUNNEL FERRULE
 - ④ NYLON INSULATION (COLOR CODED YELLOW)
- STUD SIZES: ($\pm .005$)
- 02 = .094
 04 = .119
 06 = .146
 08 = .173
 10 = .198
 14 = .265
 56 = .328
 38 = .390
- "UL" LISTING #E32244
 "CSA" LISTING #18689
- WIRE SIZE: 12 - 10 AWG
 4.0 - 6.0 MM²

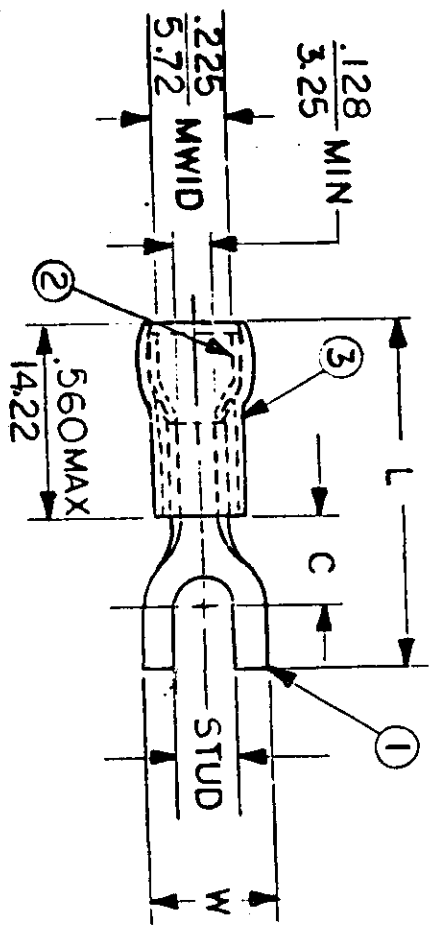

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$ (MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	AVAILABLE STUD SIZES	REFERENCE		SCALE: NTS		DATE	TITLE:
					DRWN. BY:	CHKD. BY:	APPRD. BY:			
C-841-	$\frac{.375}{9.53}$	$\frac{.301}{7.65}$	$\frac{1.118}{28.40}$	06,08,10	JJ	GZ		11.12.84	SPADE TONGUE TERMINAL AVIKRIMP 800-SERIES	
C-868-	$\frac{.533}{13.54}$	$\frac{.393}{9.98}$	$\frac{1.271}{32.28}$	10,14,56				11.26.84		
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED					FRAC.		DEC.		ANG.	
					±		±		±	

